


▶ タワー長さ 39.7m Mega Luffing 250

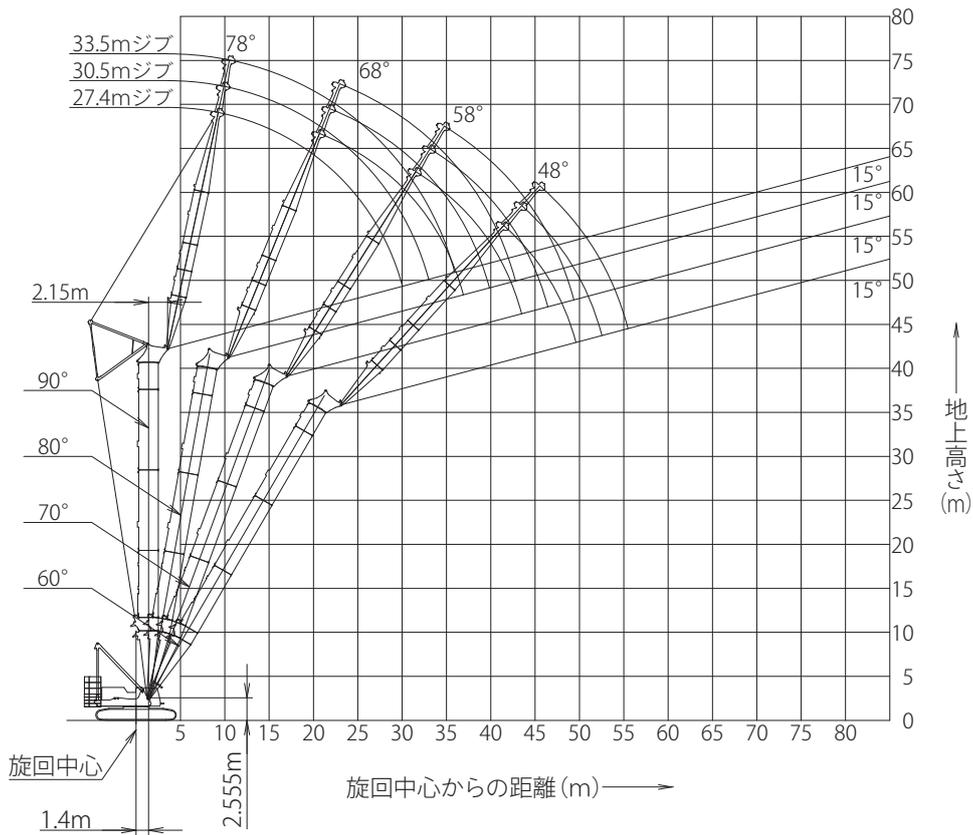


(単位：t)

| タワー長さm | 39.7 | | | | | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|------------|------------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|------------|--------|-------|
| | 27.4 | | | | 30.5 | | | | 33.5 | | | | | ジブ長さm |
| ジブ長さm | | | | | | | | | | | | | タワー角度 | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | | タワー角度 |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | 9.0 | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 14.0 | |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 16.0 | |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.2 | | | | 18.0 | |
| 20.0 | 25.3 | 26.4/21.0m | | | 24.6 | | | | 24.3 | | | | 20.0 | |
| 22.0 | 23.3 | 26.4 | | | 22.9 | 26.4/22.1m | | | 22.5 | 25.0/23.2m | | | 22.0 | |
| 24.0 | 21.3 | 25.2 | | | 21.3 | 24.8 | | | 21.1 | 24.3 | | | 24.0 | |
| 26.0 | 19.4 | 23.1 | | | 19.6 | 22.9 | | | 19.5 | 22.4 | | | 26.0 | |
| 28.0 | 15.9 | 21.1 | | | 17.8 | 21.1 | | | 17.8 | 20.8 | | | 28.0 | |
| 30.0 | 11.0 | 19.4 | 18.3/31.8m | | 15.3 | 19.4 | | | 16.3 | 19.4 | | | 30.0 | |
| 32.0 | 10.6/30.1m | 18.0 | 18.0 | | 11.7 | 18.0 | 17.2/33.4m | | 14.6 | 18.0 | | | 32.0 | |
| 34.0 | | 16.5 | 16.7 | | 9.5/33.1m | 16.7 | 16.7 | | 11.6 | 16.7 | 16.2/35.0m | | 34.0 | |
| 36.0 | | 14.7 | 15.6 | | | 15.4 | 15.6 | | 8.3 | 15.6 | 15.6 | | 36.0 | |
| 38.0 | | 13.6/37.0m | 14.5 | | | 14.1 | 14.5 | | | 14.5 | 14.5 | | 38.0 | |
| 40.0 | | | 13.7 | 13.2/41.7m | | 12.0/39.9m | 13.7 | | | 13.2 | 13.7 | | 40.0 | |
| 42.0 | | | 12.6 | 12.6 | | | 12.6 | | | 11.9 | 12.6 | | 42.0 | |
| 44.0 | | | 12.1/43.6m | 12.0 | | | 12.0 | 12.0 | | 10.6/42.9m | 12.0 | 11.3/45.8m | 44.0 | |
| 46.0 | | | | 11.2 | | | 11.2 | 11.2 | | | 11.2 | 11.2 | 46.0 | |
| 48.0 | | | | 10.3 | | 11.0/46.5m | 10.3 | | | | 10.3 | 10.3 | 48.0 | |
| 50.0 | | | | 9.9/49.7m | | | | | 9.8 | | 9.9/49.5m | 9.8 | 50.0 | |
| 52.0 | | | | | | | | 9.1 | | | | 9.1 | 52.0 | |
| 54.0 | | | | | | | | 8.8/52.6m | | | | 8.5 | 54.0 | |
| 56.0 | | | | | | | | | | | | 8.3/55.6m | 56.0 | |
| 接地 | 前方自立時 | 18.3 t/m ² | | | | 18.2 t/m ² | | | | 17.6 t/m ² | | | | 前方自立時 |
| | 作業時最大 | 45.6 t/m ² | | | | 45.1 t/m ² | | | | 45.3 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

▶ タワー長さ 42.7m Mega Luffing 250

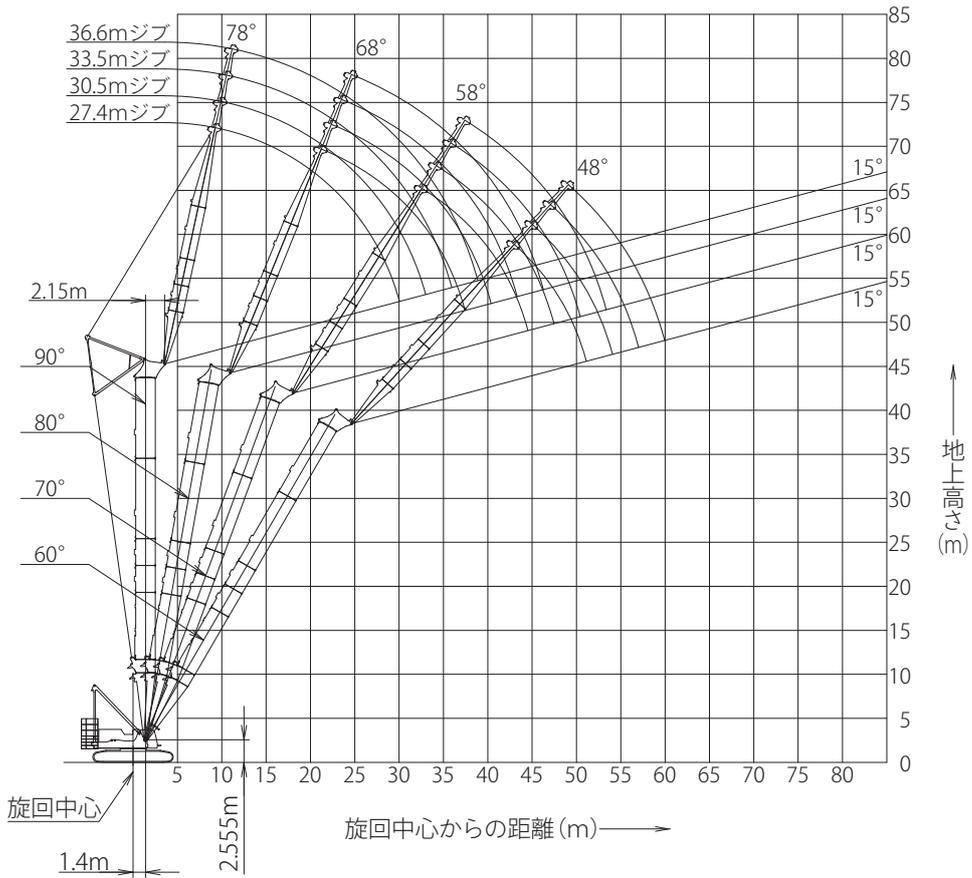


(単位：t)

| タワー長さm ジブ長さm タワー角度 | 42.7 | | | | | | | | | | | | | | | | タワー長さm ジブ長さm タワー角度 | |
|--------------------------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|------------|------------|-----------------------|-----------|------------|------------|-----------------------|------------|------------|--------------------------|-------|
| | 27.4 | | | | 30.5 | | | | 33.5 | | | | 36.6 | | | | | |
| | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | | |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | | | | | 9.0 | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | 27.0/11.4m | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 27.0 | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 27.0 | | | | 14.0 | |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 26.4 | | | | 16.0 | |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.2 | | | | 26.0 | | | | 18.0 | |
| 20.0 | 25.3 | 26.4/21.5m | | | 24.6 | | | | 24.3 | | | | 24.1 | | | | 20.0 | |
| 22.0 | 23.3 | 26.4 | | | 22.9 | 26.0/22.6m | | | 22.5 | 24.3/23.8m | | | 22.3 | | | | 22.0 | |
| 24.0 | 21.3 | 25.0 | | | 21.3 | 24.5 | | | 21.1 | 24.0 | | | 20.7 | 22.7/24.9m | | | 24.0 | |
| 26.0 | 19.2 | 23.0 | | | 19.6 | 22.6 | | | 19.5 | 22.2 | | | 19.1 | 21.7 | | | 26.0 | |
| 28.0 | 16.0 | 21.1 | | | 17.8 | 20.9 | | | 17.8 | 20.5 | | | 17.8 | 20.2 | | | 28.0 | |
| 30.0 | 11.2 | 19.4 | | | 15.4 | 19.4 | | | 16.3 | 19.2 | | | 16.5 | 18.9 | | | 30.0 | |
| 32.0 | 10.7/30.1m | 17.9 | 17.4/32.8m | | 11.8 | 17.9 | | | 14.7 | 17.8 | | | 15.2 | 17.6 | | | 32.0 | |
| 34.0 | | 16.5 | 16.7 | | 9.6/33.1m | 16.7 | 16.5/34.4m | | 11.7 | 16.6 | | | 13.9 | 16.4 | | | 34.0 | |
| 36.0 | | 14.8 | 15.6 | | | 15.4 | 15.6 | | 8.4 | 15.4 | 15.6 | | 11.4 | 15.3 | 14.9/37.7m | | 36.0 | |
| 38.0 | | 13.3/37.5m | 14.6 | | | 14.1 | 14.6 | | | 14.4 | 14.6 | | 8.9 | 14.4 | 14.6 | | 38.0 | |
| 40.0 | | | 13.6 | | | 12.5 | 13.6 | | | 13.2 | 13.6 | | 7.5/39.0m | 13.4 | 13.6 | | 40.0 | |
| 42.0 | | | 12.5 | | | 12.0/40.5m | 12.5 | | | 12.0 | 12.5 | | | 12.4 | 12.5 | | 42.0 | |
| 44.0 | | | 11.9 | 11.9 | | | 11.9 | 11.6/45.2m | | 10.7/43.4m | 11.9 | | | 11.4 | 11.9 | | 44.0 | |
| 46.0 | | | 11.4/44.6m | 11.1 | | | 11.1 | 11.1 | | | 11.1 | 10.8/47.3m | | 10.1 | 11.1 | | 46.0 | |
| 48.0 | | | | 10.5 | | | 10.6/47.6m | 10.5 | | | 10.5 | 10.5 | | 9.6/46.3m | 10.5 | 10.2/49.3m | 48.0 | |
| 50.0 | | | | 9.7 | | | | 9.7 | | | 9.7 | 9.7 | | | 9.7 | 9.7 | 50.0 | |
| 52.0 | | | | 9.4/51.2m | | | | 9.2 | | | 9.5/50.5m | 9.2 | | | 9.2 | 9.2 | 52.0 | |
| 54.0 | | | | | | | | 8.7 | | | | 8.7 | | | 8.8/53.4m | 8.7 | 54.0 | |
| 56.0 | | | | | | | | 8.6/54.1m | | | | | | | | 8.0 | 56.0 | |
| 58.0 | | | | | | | | | | | | | | | | 7.8/57.1m | 58.0 | |
| 60.0 | | | | | | | | | | | | | | | | 7.2 | 60.0 | |
| 揺地圧 | 前方自立時 | 21.8 t/m ² | | | | 21.9 t/m ² | | | | 21.8 t/m ² | | | | 20.9 t/m ² | | | | 前方自立時 |
| 揺地圧 | 作業時最大 | 45.9 t/m ² | | | | 47.6 t/m ² | | | | 48.3 t/m ² | | | | 49.1 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ホールフックの使用はできません。

▶ タワー長さ 45.8m Mega Luffing 250

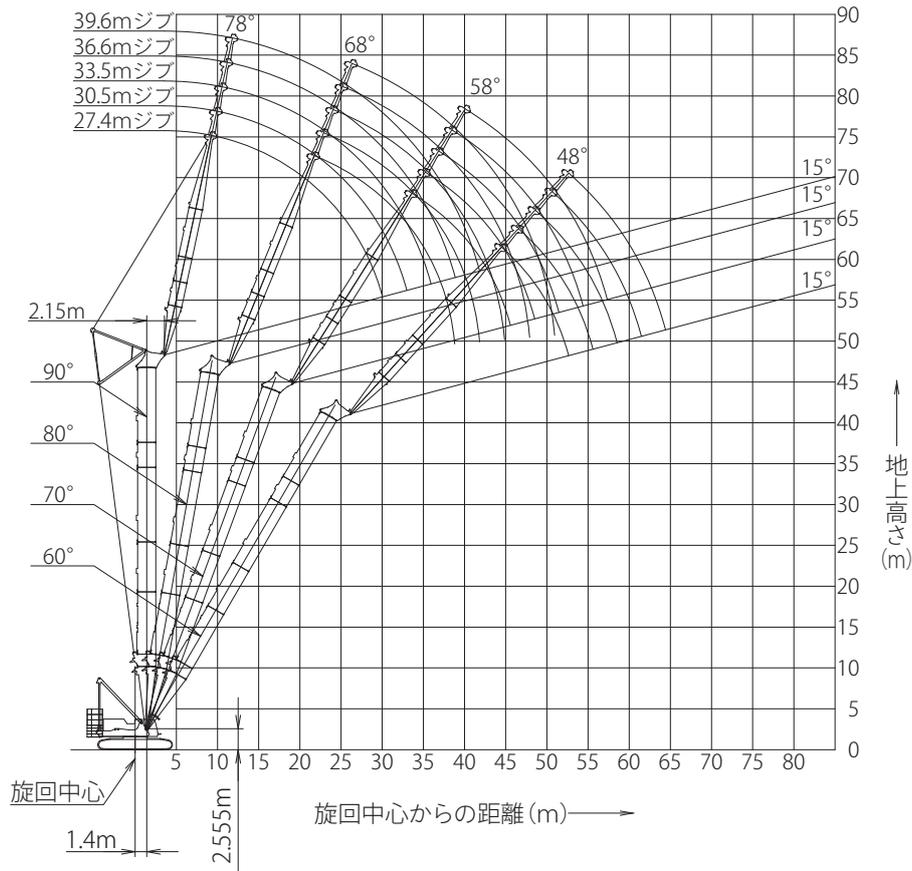


(単位: t)

| タワー長さm | 45.8 | | | | | | | | | | | | | | | | タワー長さm | | | | | | |
|--------|------------|-----------------------|------------|-----|------------|-----------------------|------------|-----|------------|-----------------------|------------|-----|------------|-----------------------|------------|-----|--------|-----------------------|------------|-----------|-----------|-------|----|
| ジブ長さm | 27.4 | | | | 30.5 | | | | 33.5 | | | | 36.6 | | | | 39.6 | | | | ジブ長さm | | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | | |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | | | | | | | | | 9.0 | | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | 27.0/11.4m | | | | | | | | 10.0 | | |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | 27.0/12.1m | | 12.0 | | |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | 27.0 | | 14.0 | | |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 26.4 | | | | | | 26.4 | | 16.0 | | |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.2 | | | | 26.0 | | | | | | 25.8 | | 18.0 | | |
| 20.0 | 25.3 | | | | 24.6 | | | | 24.3 | | | | 24.1 | | | | | | 23.9 | | 20.0 | | |
| 22.0 | 23.3 | 26.4 | | | 22.9 | 25.2/23.2m | | | 22.5 | | | | 22.3 | | | | | | 22.1 | | 22.0 | | |
| 24.0 | 21.3 | 24.8 | | | 21.3 | 24.4 | | | 21.1 | 23.5/24.3m | | | 20.7 | 22.0/25.4m | | | | 20.5 | | | 24.0 | | |
| 26.0 | 19.1 | 22.9 | | | 19.6 | 22.4 | | | 19.5 | 21.9 | | | 19.1 | 21.5 | | | | 18.8 | 20.6/26.6m | | 26.0 | | |
| 28.0 | 16.1 | 21.0 | | | 17.8 | 20.7 | | | 17.8 | 20.3 | | | 17.8 | 19.9 | | | | 17.2 | 19.6 | | 28.0 | | |
| 30.0 | 11.3 | 19.3 | | | 15.5 | 19.3 | | | 16.3 | 19.0 | | | 16.5 | 18.6 | | | | 16.1 | 18.3 | | 30.0 | | |
| 32.0 | 10.9/30.1m | 17.9 | 16.7/33.9m | | 11.9 | 17.9 | | | 14.7 | 17.6 | | | 15.2 | 17.4 | | | | 15.0 | 17.1 | | 32.0 | | |
| 34.0 | | 16.5 | 16.6 | | 9.7/33.1m | 16.6 | 15.9/35.5m | | 11.8 | 16.4 | | | 13.9 | 16.2 | | | | 14.0 | 16.0 | | 34.0 | | |
| 36.0 | | 14.9 | 15.5 | | | 15.3 | 15.5 | | 8.5 | 15.3 | 15.0/37.1m | | 11.5 | 15.2 | | | | 13.0 | 15.0 | | 36.0 | | |
| 38.0 | | 13.0 | 14.6 | | | 14.1 | 14.6 | | | 14.3 | 14.6 | | 9.0 | 14.3 | 14.4/38.7m | | | 11.0 | 14.1 | | 38.0 | | |
| 40.0 | | | 13.7 | | | 12.6 | 13.7 | | | 13.2 | 13.7 | | 7.5/39.0m | 13.3 | 13.7 | | | 9.0 | 13.3 | 13.3/40.3 | 40.0 | | |
| 42.0 | | | 12.5 | | | 11.7/41.0m | 12.5 | | | 12.0 | 12.5 | | | 12.4 | 12.5 | | | 6.7/41.9m | 12.4 | 12.5 | | 42.0 | |
| 44.0 | | | 11.8 | | | | 11.8 | | | 10.6/43.9m | 11.8 | | | 11.4 | 11.8 | | | | 11.6 | 11.8 | | 44.0 | |
| 46.0 | | 11.1/45.7m | 11.1 | | | 11.1 | 10.9/46.8m | | | 11.1 | | | | 10.3 | 11.1 | | | | 10.7 | 11.1 | | 46.0 | |
| 48.0 | | | 10.3 | | | 10.3 | 10.3 | | | 10.3 | 10.1/48.8m | | | 9.7/46.9m | 10.3 | | | | 9.8 | 10.3 | | 48.0 | |
| 50.0 | | | 9.7 | | | 10.0/48.6m | 9.7 | | | 9.7 | 9.7 | | | 9.7 | 9.5/50.8m | | | | 8.6/49.8m | 9.7 | 50.0 | | |
| 52.0 | | | 9.2 | | | | 9.2 | | | 9.3/51.5m | 9.2 | | | 9.2 | 9.2 | | | | 9.2 | 9.1/52.9m | 9.2 | 52.0 | |
| 54.0 | | | 8.8/52.7m | | | | 8.5 | | | | 8.5 | | | 8.5 | 8.5 | | | | 8.5 | 8.5 | | 54.0 | |
| 56.0 | | | | | | | 8.3/55.7m | | | | 8.2 | | | | 8.5/54.5m | 8.2 | | | 8.2 | 8.2 | | 56.0 | |
| 58.0 | | | | | | | | | | | 7.7 | | | | 7.7 | | | | 7.8/57.4m | 7.7 | 58.0 | | |
| 60.0 | | | | | | | | | | | 7.3/58.6m | | | | | | | | | 7.1 | 60.0 | | |
| 62.0 | | | | | | | | | | | | | | | | | | | 7.0/61.6m | | 62.0 | | |
| 64.0 | | | | | | | | | | | | | | | | | | | | | 6.4 | 64.0 | |
| 66.0 | | | | | | | | | | | | | | | | | | | | | 6.3/64.5m | 66.0 | |
| 接地圧 | 前方自立時 | 24.9 t/m ² | | | | 25.1 t/m ² | | | | 25.2 t/m ² | | | | 24.9 t/m ² | | | | 23.9 t/m ² | | | | 前方自立時 | 接地 |
| | 作業時最大 | 48.1 t/m ² | | | | 49.6 t/m ² | | | | 50.0 t/m ² | | | | 50.7 t/m ² | | | | 52.5 t/m ² | | | | 作業時最大 | 接地 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

▶ タワー長さ 48.8m Mega Luffing 250

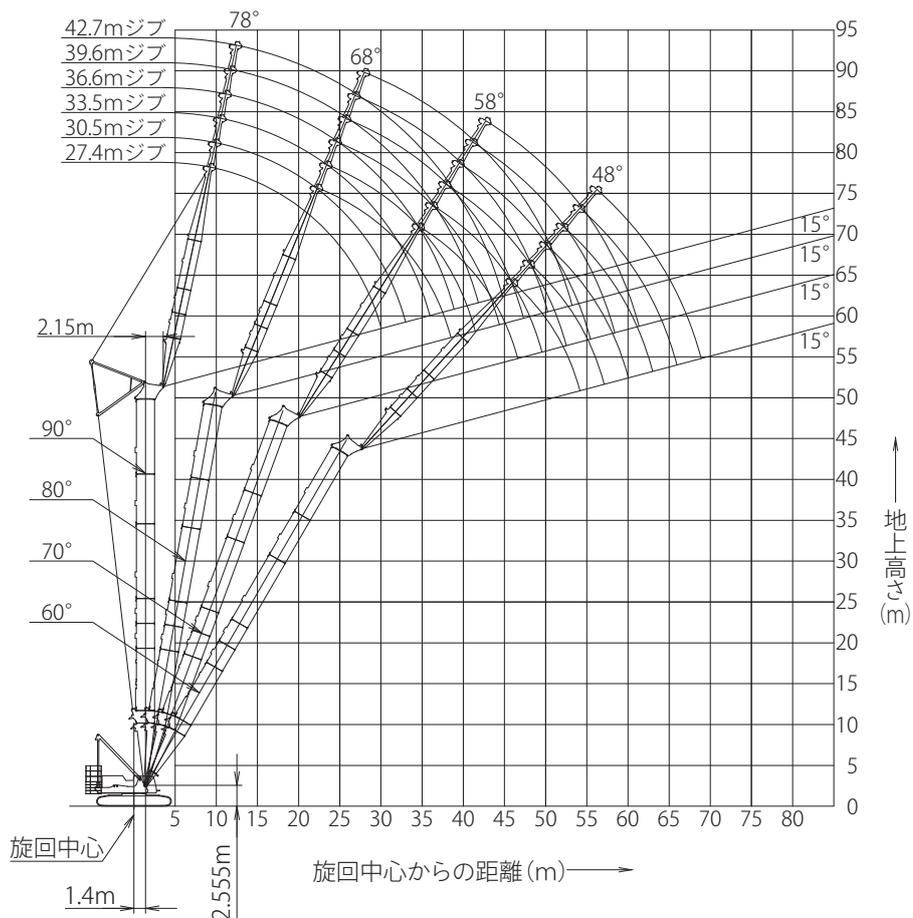

(単位：t)

| タワー長さm | 48.8 | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|------------|------------|------------|-----------------------|------------|-----------|--------|-------|
| ジブ長さm | 27.4 | | | | 30.5 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 9.0 | 27.0/9.5m | | | | 27.0/10.2m | | | | 9.0 | |
| 10.0 | 27.0 | | | | 27.0 | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 14.0 | |
| 16.0 | 27.0 | | | | 27.0 | | | | 16.0 | |
| 18.0 | 27.0 | | | | 26.4 | | | | 18.0 | |
| 20.0 | 25.3 | | | | 24.6 | | | | 20.0 | |
| 22.0 | 23.3 | 26.3/22.5m | | | 22.9 | 24.5/23.7m | | | 22.0 | |
| 24.0 | 21.3 | 24.6 | | | 21.3 | 24.1 | | | 24.0 | |
| 26.0 | 19.1 | 22.6 | | | 19.6 | 22.2 | | | 26.0 | |
| 28.0 | 16.2 | 20.9 | | | 17.8 | 20.5 | | | 28.0 | |
| 30.0 | 11.4 | 19.3 | | | 15.6 | 19.1 | | | 30.0 | |
| 32.0 | 11.0/30.1m | 17.9 | | | 12.0 | 17.7 | | | 32.0 | |
| 34.0 | | 16.4 | 16.1/34.9m | | 9.7/33.1m | 16.4 | | | 34.0 | |
| 36.0 | | 14.9 | 15.5 | | | 15.2 | 15.2/36.5m | | 36.0 | |
| 38.0 | | 13.3 | 14.5 | | | 14.1 | 14.5 | | 38.0 | |
| 40.0 | | 12.7/38.6m | 13.6 | | | 12.7 | 13.6 | | 40.0 | |
| 42.0 | | | 12.9 | | | 11.4/41.5m | 12.9 | | 42.0 | |
| 44.0 | | | 11.7 | | | | 11.7 | | 44.0 | |
| 46.0 | | | 11.1 | 11.0/46.2m | | | 11.1 | | 46.0 | |
| 48.0 | | | 10.7/46.7m | 10.4 | | | 10.4 | | 48.0 | |
| 50.0 | | | | 9.8 | | | 9.9/49.6m | 9.8 | 50.0 | |
| 52.0 | | | | 9.1 | | | | 9.1 | 52.0 | |
| 54.0 | | | | 8.5 | | | | 8.5 | 54.0 | |
| 56.0 | | | | 8.4/54.2m | | | | 8.2 | 56.0 | |
| 58.0 | | | | | | | | 7.8/57.2m | 58.0 | |
| 接地圧 | 前方自立時 | 28.7 t/m ² | | | | 29.0 t/m ² | | | | 前方自立時 |
| | 作業時最大 | 51.6 t/m ² | | | | 52.6 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4mでの、ボールフックの使用はできません。

(単位：t)

| タワー長さm | 48.8 | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|-----------|--------|-------|
| ジブ長さm | 33.5 | | | | 36.6 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 10.0 | 27.0/10.8m | | | | 27.0/11.4m | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 14.0 | |
| 16.0 | 27.0 | | | | 26.4 | | | | 16.0 | |
| 18.0 | 26.2 | | | | 26.0 | | | | 18.0 | |
| 20.0 | 24.2 | | | | 24.0 | | | | 20.0 | |
| 22.0 | 22.5 | | | | 22.3 | | | | 22.0 | |
| 24.0 | 21.1 | 22.8/24.8m | | | 20.7 | | | | 24.0 | |
| 26.0 | 19.5 | 21.7 | | | 19.1 | 21.3 | | | 26.0 | |
| 28.0 | 17.8 | 20.1 | | | 17.8 | 19.7 | | | 28.0 | |
| 30.0 | 16.3 | 18.7 | | | 16.5 | 18.4 | | | 30.0 | |
| 32.0 | 14.7 | 17.4 | | | 15.2 | 17.2 | | | 32.0 | |
| 34.0 | 11.9 | 16.2 | | | 13.9 | 16.0 | | | 34.0 | |
| 36.0 | 8.5 | 15.1 | | | 11.5 | 15.0 | | | 36.0 | |
| 38.0 | | 14.2 | 14.4/38.1m | | 9.0 | 14.1 | 13.6/39.7m | | 38.0 | |
| 40.0 | | 13.1 | 13.6 | | 7.6/39.0m | 13.2 | 13.6 | | 40.0 | |
| 42.0 | | 12.0 | 12.9 | | | 12.3 | 12.9 | | 42.0 | |
| 44.0 | | 10.7 | 11.7 | | | 11.3 | 11.7 | | 44.0 | |
| 46.0 | | 10.3/44.5m | 11.1 | | | 10.3 | 11.1 | | 46.0 | |
| 48.0 | | | 10.4 | | | 9.5/47.4m | 10.4 | | 48.0 | |
| 50.0 | | | 9.8 | 9.7/50.3m | | | 9.8 | | 50.0 | |
| 52.0 | | | 9.1 | 9.1 | | | 9.1 | 9.0/52.4m | 52.0 | |
| 54.0 | | | 8.8/52.6m | 8.5 | | | 8.5 | 8.5 | 54.0 | |
| 56.0 | | | | 8.2 | | | 8.2/55.5m | 8.2 | 56.0 | |
| 58.0 | | | | 7.7 | | | | 7.7 | 58.0 | |
| 60.0 | | | | 7.1 | | | | 7.1 | 60.0 | |
| 62.0 | | | | 7.0/60.1m | | | | 6.8 | 62.0 | |
| 64.0 | | | | | | | | 6.3/63.1m | 64.0 | |
| 接地圧 | 前方自立時 | 29.2 t/m ² | | | | 29.1 t/m ² | | | | 前方自立時 |
| | 作業時最大 | 54.2 t/m ² | | | | 54.5 t/m ² | | | | 作業時最大 |


※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

(単位：t)

| タワー長さm | 48.8 | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|-----------|--------|-------|
| ジブ長さm | 39.6 | | | | 42.7 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 12.0 | 27.0/12.1m | | | | 26.4/12.7m | | | | 12.0 | |
| 14.0 | 27.0 | | | | 26.4 | | | | 14.0 | |
| 16.0 | 26.4 | | | | 26.1 | | | | 16.0 | |
| 18.0 | 25.8 | | | | 25.0 | | | | 18.0 | |
| 20.0 | 23.9 | | | | 23.7 | | | | 20.0 | |
| 22.0 | 22.1 | | | | 21.9 | | | | 22.0 | |
| 24.0 | 20.5 | | | | 20.3 | | | | 24.0 | |
| 26.0 | 18.8 | 19.9/27.1m | | | 18.5 | | | | 26.0 | |
| 28.0 | 17.2 | 19.4 | | | 16.9 | 18.7/28.3m | | | 28.0 | |
| 30.0 | 16.1 | 18.0 | | | 15.6 | 17.6 | | | 30.0 | |
| 32.0 | 15.0 | 16.8 | | | 14.6 | 16.4 | | | 32.0 | |
| 34.0 | 14.0 | 15.8 | | | 13.6 | 15.4 | | | 34.0 | |
| 36.0 | 13.1 | 14.8 | | | 12.8 | 14.5 | | | 36.0 | |
| 38.0 | 11.1 | 14.0 | | | 12.1 | 13.7 | | | 38.0 | |
| 40.0 | 9.0 | 13.1 | 12.6/41.4m | | 10.5 | 12.8 | | | 40.0 | |
| 42.0 | 6.7/41.9m | 12.3 | 12.5 | | 8.8 | 12.1 | 11.7/43.0m | | 42.0 | |
| 44.0 | | 11.5 | 11.7 | | 6.8 | 11.3 | 11.4 | | 44.0 | |
| 46.0 | | 10.6 | 11.1 | | 5.8/44.8m | 10.6 | 10.9 | | 46.0 | |
| 48.0 | | 9.8 | 10.4 | | | 9.9 | 10.4 | | 48.0 | |
| 50.0 | | 8.9 | 9.8 | | | 9.3 | 9.8 | | 50.0 | |
| 52.0 | | 8.7/50.3m | 9.1 | | | 8.5 | 9.1 | | 52.0 | |
| 54.0 | | | 8.5 | 8.5/54.4m | | 7.7/53.3m | 8.5 | | 54.0 | |
| 56.0 | | | 8.2 | 8.2 | | | 8.2 | 7.9/56.4m | 56.0 | |
| 58.0 | | | 7.7 | 7.7 | | | 7.7 | 7.7 | 58.0 | |
| 60.0 | | | 7.3/58.5m | 7.1 | | | 7.1 | 7.1 | 60.0 | |
| 62.0 | | | | 6.8 | | | 6.9/61.4m | 6.8 | 62.0 | |
| 64.0 | | | | 6.2 | | | | 6.2 | 64.0 | |
| 66.0 | | | | 6.0 | | | | 6.0 | 66.0 | |
| 68.0 | | | | | | | | 5.5 | 68.0 | |
| 70.0 | | | | | | | | 5.4/69.0m | 70.0 | |
| 接地圧 | 前方自立時 | 28.7 t/m ² | | | | 27.8 t/m ² | | | | 前方自立時 |
| | 作業時最大 | 55.7 t/m ² | | | | 57.2 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

▶ タワー長さ 51.9m Mega Luffing 250

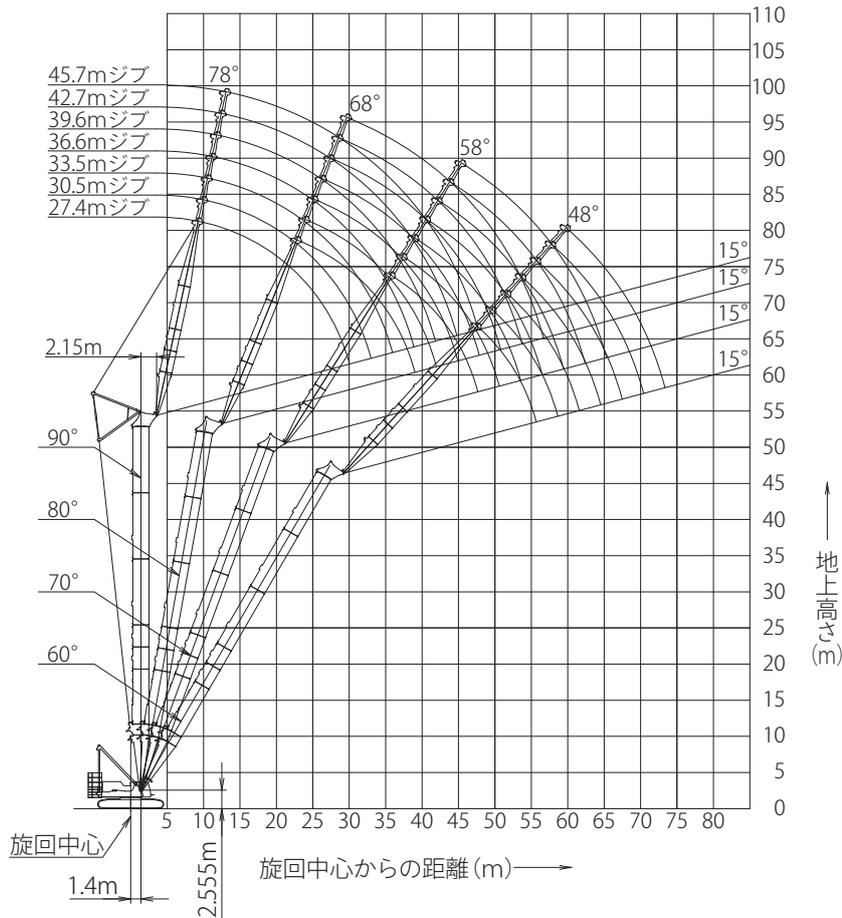

(単位：t)

| タワー長さm ジブ長さm | 27.4 | | | | 30.5 | | | | 33.5 | | | | タワー長さm ジブ長さm |
|-----------------|-----------------------|------------|------------|------------|-----------------------|------------|------------|-----------|-----------------------|------------|------------|-----|-----------------|
| | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | 9.0 |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | 10.0 |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 12.0 |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 14.0 |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 16.0 |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.1 | | | | 18.0 |
| 20.0 | 25.3 | | | | 24.6 | | | | 24.2 | | | | 20.0 |
| 22.0 | 23.3 | 25.5/23.1m | | | 22.9 | | | | 22.5 | | | | 22.0 |
| 24.0 | 21.3 | 24.5 | | | 21.3 | 23.7/24.2m | | | 21.1 | 22.1/25.4m | | | 24.0 |
| 26.0 | 19.1 | 22.5 | | | 19.6 | 22.0 | | | 19.5 | 21.5 | | | 26.0 |
| 28.0 | 16.3 | 20.7 | | | 17.8 | 20.3 | | | 17.8 | 19.9 | | | 28.0 |
| 30.0 | 11.4 | 19.2 | | | 15.6 | 18.9 | | | 16.2 | 18.5 | | | 30.0 |
| 32.0 | 11.0/30.1m | 17.8 | | | 12.0 | 17.6 | | | 14.7 | 17.3 | | | 32.0 |
| 34.0 | | 16.4 | 15.7/35.9m | | 9.8/33.1m | 16.3 | | | 11.9 | 16.1 | | | 34.0 |
| 36.0 | | 15.0 | 15.5 | | | 15.1 | 14.8/37.6m | | 8.6 | 15.0 | | | 36.0 |
| 38.0 | | 13.5 | 14.5 | | | 14.0 | 14.5 | | | 14.1 | 14.0/39.2m | | 38.0 |
| 40.0 | | 12.4/39.1m | 13.7 | | | 12.8 | 13.7 | | | 13.0 | 13.7 | | 40.0 |
| 42.0 | | | 12.8 | | | 11.2 | 12.8 | | | 12.0 | 12.8 | | 42.0 |
| 44.0 | | | 11.8 | | | | 11.8 | | | 10.8 | 11.8 | | 44.0 |
| 46.0 | | | 11.0 | 10.5/47.8m | | | 11.0 | | | 10.1/45.0m | 11.0 | | 46.0 |
| 48.0 | | | 10.5/47.7m | 10.4 | | | 10.4 | | | 10.4 | | | 48.0 |
| 50.0 | | | | 9.7 | | | 9.7 | 9.7 | | 9.7 | 9.1/51.8m | | 50.0 |
| 52.0 | | | | 9.0 | | | 9.2/50.7m | 9.0 | | 9.0 | 9.0 | | 52.0 |
| 54.0 | | | | 8.6 | | | | 8.6 | | 8.7/53.6m | 8.6 | | 54.0 |
| 56.0 | | | | 8.1/55.8m | | | | 8.1 | | | 8.1 | | 56.0 |
| 58.0 | | | | | | | | 7.7 | | | 7.7 | | 58.0 |
| 60.0 | | | | | | | | 7.5/58.7m | | | 7.3 | | 60.0 |
| 62.0 | | | | | | | | | | | 6.8/61.7m | | 62.0 |
| 接地点 前方自立時 | 31.9 t/m ² | | | | 32.4 t/m ² | | | | 32.7 t/m ² | | | | 前方自立時 |
| 接地点 作業時最大 | 54.9 t/m ² | | | | 55.6 t/m ² | | | | 56.9 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ホールフックの使用はできません。

(単位：t)

| タワー長さm | | 51.9 | | | | | | | | タワー長さm |
|---------|-------|-----------------------|------------|------------|-----------|-----------------------|------------|------------|-----------|--------|
| ジブ長さm | | 36.6 | | | | 39.6 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径(m) | 10.0 | 27.0/11.4m | | | | | | | | 10.0 |
| | 12.0 | 27.0 | | | | 27.0/12.1m | | | | 12.0 |
| | 14.0 | 27.0 | | | | 27.0 | | | | 14.0 |
| | 16.0 | 26.4 | | | | 26.4 | | | | 16.0 |
| | 18.0 | 26.0 | | | | 25.8 | | | | 18.0 |
| | 20.0 | 24.0 | | | | 23.8 | | | | 20.0 |
| | 22.0 | 22.2 | | | | 22.1 | | | | 22.0 |
| | 24.0 | 20.7 | | | | 20.5 | | | | 24.0 |
| | 26.0 | 19.1 | 20.6/26.5m | | | 18.8 | 19.4/27.6m | | | 26.0 |
| | 28.0 | 17.8 | 19.6 | | | 17.2 | 19.2 | | | 28.0 |
| | 30.0 | 16.5 | 18.2 | | | 16.1 | 17.8 | | | 30.0 |
| | 32.0 | 15.2 | 17.0 | | | 15.0 | 16.6 | | | 32.0 |
| | 34.0 | 13.9 | 15.9 | | | 13.9 | 15.6 | | | 34.0 |
| | 36.0 | 11.6 | 14.8 | | | 13.0 | 14.7 | | | 36.0 |
| | 38.0 | 9.1 | 14.0 | | | 11.1 | 13.8 | | | 38.0 |
| | 40.0 | 7.6/39.0m | 13.1 | 13.0/40.8m | | 9.1 | 12.9 | | | 40.0 |
| | 42.0 | | 12.2 | 12.6 | | 6.7/41.9m | 12.1 | 12.0/42.4m | | 42.0 |
| | 44.0 | | 11.3 | 11.8 | | | 11.4 | 11.6 | | 44.0 |
| | 46.0 | | 10.3 | 11.0 | | | 10.6 | 11.0 | | 46.0 |
| | 48.0 | | 9.3/47.9m | 10.4 | | | 9.8 | 10.4 | | 48.0 |
| | 50.0 | | | 9.7 | | | 8.9 | 9.7 | | 50.0 |
| | 52.0 | | | 9.0 | 8.7/53.9m | | 8.4/50.9m | 9.0 | | 52.0 |
| | 54.0 | | | 8.6 | 8.6 | | | 8.6 | 8.1/55.9m | 54.0 |
| | 56.0 | | | 8.1 | 8.1 | | | 8.1 | 8.1 | 56.0 |
| 58.0 | | | 7.8/56.6m | 7.7 | | | 7.7 | 7.7 | 58.0 | |
| 60.0 | | | | 7.3 | | | 7.4/59.5m | 7.3 | 60.0 | |
| 62.0 | | | | 6.7 | | | | 6.7 | 62.0 | |
| 64.0 | | | | 6.3 | | | | 6.3 | 64.0 | |
| 66.0 | | | | 6.1/64.6m | | | | 5.9 | 66.0 | |
| 68.0 | | | | | | | | 5.6/67.5m | 68.0 | |
| 接地圧 | 前方自立時 | 32.7 t/m ² | | | | 32.5 t/m ² | | | | 前方自立時 |
| 接地圧 | 作業時最大 | 58.7 t/m ² | | | | 59.3 t/m ² | | | | 作業時最大 |


※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

(単位：t)

| タワー長さm | | 51.9 | | | | | | | | タワー長さm |
|---------|-------|-----------------------|-----------|-----------|-----|-----------------------|------------|------------|------|--------|
| ジブ長さm | | 42.7 | | | | 45.7 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径(m) | 12.0 | 26.4/12.7m | | | | 24.8/13.3m | | | | 12.0 |
| | 14.0 | 26.4 | | | | 24.5 | | | | 14.0 |
| | 16.0 | 26.1 | | | | 23.6 | | | | 16.0 |
| | 18.0 | 25.0 | | | | 22.6 | | | | 18.0 |
| | 20.0 | 23.6 | | | | 21.6 | | | | 20.0 |
| | 22.0 | 21.9 | | | | 20.6 | | | | 22.0 |
| | 24.0 | 20.3 | | | | 19.6 | | | | 24.0 |
| | 26.0 | 18.5 | | | | 18.3 | | | | 26.0 |
| | 28.0 | 16.9 | 18.1/28.8 | | | 16.7 | 17.0/29.9m | | | 28.0 |
| | 30.0 | 15.6 | 17.4 | | | 15.3 | 17.0 | | | 30.0 |
| | 32.0 | 14.6 | 16.2 | | | 14.3 | 15.8 | | | 32.0 |
| | 34.0 | 13.6 | 15.2 | | | 13.4 | 14.8 | | | 34.0 |
| | 36.0 | 12.8 | 14.3 | | | 12.5 | 14.0 | | | 36.0 |
| | 38.0 | 12.1 | 13.5 | | | 11.8 | 13.2 | | | 38.0 |
| | 40.0 | 10.6 | 12.7 | | | 11.2 | 12.5 | | | 40.0 |
| | 42.0 | 8.8 | 11.9 | | | 10.0 | 11.7 | | | 42.0 |
| | 44.0 | 6.8 | 11.2 | 11.1 | | 8.4 | 11.1 | 10.3/45.6m | | 44.0 |
| | 46.0 | 5.9/44.8m | 10.5 | 10.6 | | 6.8 | 10.4 | 10.2 | | 46.0 |
| | 48.0 | | 9.8 | 10.1 | | 5.2/47.8m | 9.8 | 9.8 | | 48.0 |
| | 50.0 | | 9.2 | 9.7 | | | 9.3 | 9.4 | | 50.0 |
| | 52.0 | | 8.5 | 9.0 | | | 8.7 | 9.0 | | 52.0 |
| | 54.0 | | 7.6/53.8m | 8.6 | | | 8.0 | 8.6 | | 54.0 |
| | 56.0 | | | 8.1 | | | 7.3 | 8.1 | | 56.0 |
| | 58.0 | | | 7.7 | 7.4 | | 6.9/56.8m | 7.7 | | 58.0 |
| 60.0 | | | 7.3 | 7.0 | | | 7.3 | 6.8 | 60.0 | |
| 62.0 | | | 6.7 | 6.7 | | | 6.7 | 6.5 | 62.0 | |
| 64.0 | | | 6.4/62.5m | 6.3 | | | 6.3 | 6.2 | 64.0 | |
| 66.0 | | | | 5.9 | | | 6.0/65.4m | 5.9 | 66.0 | |
| 68.0 | | | | 5.5 | | | | 5.5 | 68.0 | |
| 70.0 | | | | 5.1 | | | | 5.1 | 70.0 | |
| 72.0 | | | | 5.0/70.5m | | | | 4.6 | 72.0 | |
| 74.0 | | | | | | | | 4.5/73.4m | 74.0 | |
| 接地圧 | 前方自立時 | 32.3 t/m ² | | | | 31.0 t/m ² | | | | 前方自立時 |
| 接地圧 | 作業時最大 | 59.6 t/m ² | | | | 59.9 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

▶ タワー長さ 54.9m Mega Luffing 250

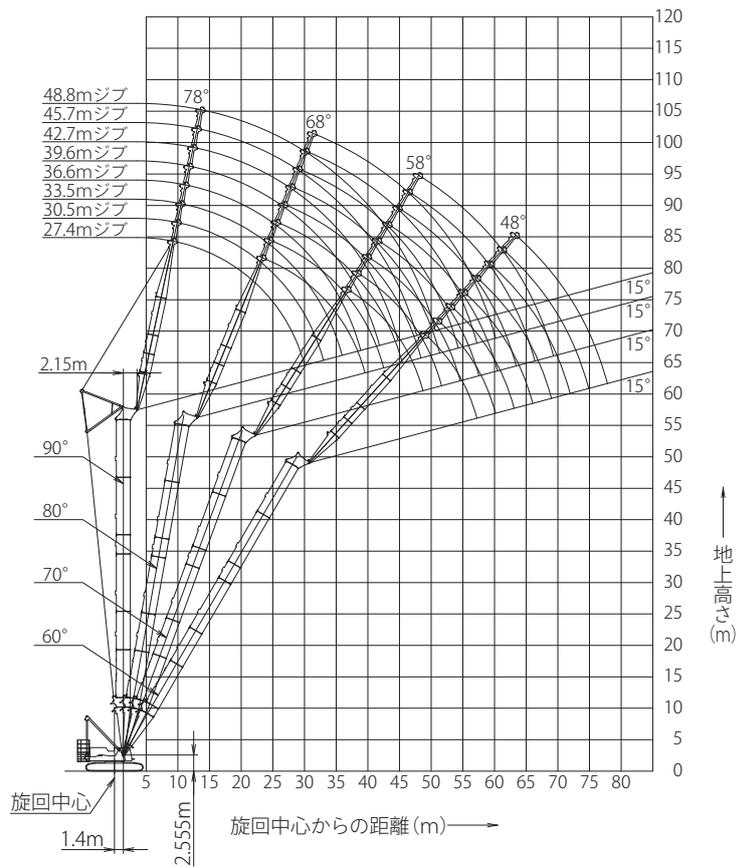

(単位：t)

| タワー長さm ジブ長さm | 27.4 | | | | 30.5 | | | | 33.5 | | | | タワー長さm ジブ長さm |
|-----------------|-----------------------|------------|------------|-----------|-----------------------|------------|------------|-----------|-----------------------|------------|------------|-----------|-----------------|
| | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | |
| 9.0 | 27.0/9.5m | | | | | | | | 27.0/10.8m | | | | 9.0 |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0 | | | | 10.0 |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 12.0 |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 14.0 |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 16.0 |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.1 | | | | 18.0 |
| 20.0 | 25.3 | | | | 24.6 | | | | 24.2 | | | | 20.0 |
| 22.0 | 23.3 | 24.7/23.6m | | | 22.9 | | | | 22.5 | | | | 22.0 |
| 24.0 | 21.3 | 24.3 | | | 21.3 | 23.0/24.7m | | | 21.1 | 21.4/25.9m | | | 24.0 |
| 26.0 | 19.1 | 22.3 | | | 19.6 | 21.8 | | | 19.5 | 21.3 | | | 26.0 |
| 28.0 | 16.3 | 20.6 | | | 17.8 | 20.1 | | | 17.8 | 19.7 | | | 28.0 |
| 30.0 | 11.5 | 19.1 | | | 15.6 | 18.8 | | | 16.2 | 18.4 | | | 30.0 |
| 32.0 | 11.1/30.1m | 17.7 | | | 12.1 | 17.4 | | | 14.7 | 17.1 | | | 32.0 |
| 34.0 | | 16.3 | | | 9.8/33.1m | 16.2 | | | 12.0 | 15.9 | | | 34.0 |
| 36.0 | | 14.9 | 15.0/37.0m | | | 15.0 | | | 8.6 | 14.9 | | | 36.0 |
| 38.0 | | 13.6 | 14.5 | | | 14.0 | 14.2/38.6m | | | 13.9 | | | 38.0 |
| 40.0 | | 12.1/39.6m | 13.6 | | | 12.8 | 13.6 | | | 13.0 | 13.4/40.2m | | 40.0 |
| 42.0 | | | 12.8 | | | 11.4 | 12.8 | | | 12.0 | 12.7 | | 42.0 |
| 44.0 | | | 11.7 | | | 10.9/42.6m | 11.7 | | | 10.9 | 11.7 | | 44.0 |
| 46.0 | | | 11.2 | | | | 11.2 | | | 9.8/45.5m | 11.2 | | 46.0 |
| 48.0 | | | 10.4 | | | | 10.4 | | | | 10.4 | | 48.0 |
| 50.0 | | | 9.8/48.8m | 9.5 | | | 9.5 | 9.3/51.3m | | | 9.5 | | 50.0 |
| 52.0 | | | | 9.2 | | | 9.2/51.7m | 9.2 | | | 9.2 | 8.6/53.4m | 52.0 |
| 54.0 | | | | 8.6 | | | | 8.6 | | | 8.6 | 8.4 | 54.0 |
| 56.0 | | | | 8.1 | | | | 8.1 | | | 8.3/54.7m | 8.0 | 56.0 |
| 58.0 | | | | 7.9/57.3m | | | | 7.8 | | | | 7.6 | 58.0 |
| 60.0 | | | | | | | | 7.2 | | | | 7.2 | 60.0 |
| 62.0 | | | | | | | | 7.1/60.2m | | | | 6.7 | 62.0 |
| 64.0 | | | | | | | | | | | | 6.6/63.2m | 64.0 |
| 接地 前方自立時 | 36.2 t/m ² | | | | 36.9 t/m ² | | | | 37.4 t/m ² | | | | 前方自立時 |
| 接地 作業時最大 | 58.0 t/m ² | | | | 60.1 t/m ² | | | | 60.4 t/m ² | | | | 接地 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

(単位：t)

| タワー長さm | | 54.9 | | | | | | | | | | | | タワー長さm |
|---------|-------|-----------------------|------------|------------|-----------|-----------------------|------------|------------|-----------|-----------------------|------------|------------|------|--------|
| ジブ長さm | | 36.6 | | | | 39.6 | | | | 42.7 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径(m) | 10.0 | 27.0/11.4m | | | | | | | | | | | | 10.0 |
| | 12.0 | 27.0 | | | | 27.0/12.1m | | | | 26.4/12.7m | | | | 12.0 |
| | 14.0 | 27.0 | | | | 27.0 | | | | 26.4 | | | | 14.0 |
| | 16.0 | 26.4 | | | | 26.4 | | | | 26.0 | | | | 16.0 |
| | 18.0 | 25.9 | | | | 25.8 | | | | 24.9 | | | | 18.0 |
| | 20.0 | 24.0 | | | | 23.8 | | | | 23.6 | | | | 20.0 |
| | 22.0 | 22.2 | | | | 22.0 | | | | 21.8 | | | | 22.0 |
| | 24.0 | 20.6 | | | | 20.5 | | | | 20.3 | | | | 24.0 |
| | 26.0 | 19.1 | 20.0/27.0m | | | 18.7 | | | | 18.5 | | | | 26.0 |
| | 28.0 | 17.8 | 19.4 | | | 17.2 | 18.8/28.2m | | | 16.9 | 17.6/29.3m | | | 28.0 |
| | 30.0 | 16.5 | 18.0 | | | 16.1 | 17.6 | | | 15.6 | 17.1 | | | 30.0 |
| | 32.0 | 15.2 | 16.8 | | | 15.0 | 16.4 | | | 14.6 | 16.0 | | | 32.0 |
| | 34.0 | 13.9 | 15.7 | | | 13.9 | 15.4 | | | 13.6 | 15.0 | | | 34.0 |
| | 36.0 | 11.6 | 14.7 | | | 12.9 | 14.5 | | | 12.8 | 14.2 | | | 36.0 |
| | 38.0 | 9.1 | 13.8 | | | 11.1 | 13.6 | | | 12.0 | 13.3 | | | 38.0 |
| | 40.0 | 7.6/39.0m | 12.9 | 12.4/41.8m | | 9.1 | 12.8 | | | 10.6 | 12.5 | | | 40.0 |
| | 42.0 | | 12.1 | 12.3 | | 6.8/41.9m | 12.0 | 11.4/43.4m | | 8.8 | 11.8 | | | 42.0 |
| | 44.0 | | 11.2 | 11.7 | | | 11.2 | 11.3 | | 6.9 | 11.1 | 10.5/45.1m | | 44.0 |
| | 46.0 | | 10.3 | 11.1 | | | 10.5 | 10.8 | | 5.9/44.8m | 10.4 | 10.3 | | 46.0 |
| | 48.0 | | 9.6 | 10.4 | | | 9.8 | 10.3 | | | 9.8 | 9.8 | | 48.0 |
| | 50.0 | | 9.0/48.5m | 9.5 | | | 9.0 | 9.5 | | | 9.2 | 9.5 | | 50.0 |
| | 52.0 | | | 9.2 | | | 8.2/51.4m | 9.2 | | | 8.5 | 9.1 | | 52.0 |
| | 54.0 | | | 8.6 | 8.0/55.4m | | | 8.6 | | | 7.6 | 8.6 | | 54.0 |
| | 56.0 | | | 8.1 | 7.8 | | | 8.1 | 7.4/57.5m | | 7.4/54.4m | 8.1 | | 56.0 |
| 58.0 | | | 7.8/57.6m | 7.5 | | | 7.8 | 7.3 | | | 7.8 | 6.7/59.5m | 58.0 | |
| 60.0 | | | | 7.1 | | | 7.2 | 6.9 | | | 7.2 | 6.6 | 60.0 | |
| 62.0 | | | | 6.7 | | | 6.8/60.6m | 6.6 | | | 6.7 | 6.3 | 62.0 | |
| 64.0 | | | | 6.5 | | | | 6.3 | | | 6.4/63.5m | 6.0 | 64.0 | |
| 66.0 | | | | 5.9 | | | | 5.9 | | | | 5.7 | 66.0 | |
| 68.0 | | | | 5.8/66.1m | | | | 5.4 | | | | 5.4 | 68.0 | |
| 70.0 | | | | | | | | 5.1/69.1m | | | | 5.0 | 70.0 | |
| 72.0 | | | | | | | | | | | | 4.8 | 72.0 | |
| 接地 | 前方自立時 | 37.5 t/m ² | | | | 37.4 t/m ² | | | | 37.5 t/m ² | | | | 前方自立時 |
| 接地 | 作業時最大 | 61.7 t/m ² | | | | 61.5 t/m ² | | | | 61.4 t/m ² | | | | 作業時最大 |


※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

(単位：t)

| タワー長さm | | 54.9 | | | | | | | | | | | | タワー長さm |
|---------|-------|-----------------------|------------|-----------|-----|-----|-----------|------------|-----------|-----------------------|-----------|-----|------|--------|
| ジブ長さm | | 45.7 | | | | | | | | 48.8 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径(m) | 12.0 | 24.7/13.3m | | | | | | | | | | | | 12.0 |
| | 14.0 | 24.5 | | | | | 21.3 | | | | | | | 14.0 |
| | 16.0 | 23.5 | | | | | 20.5 | | | | | | | 16.0 |
| | 18.0 | 22.5 | | | | | 19.8 | | | | | | | 18.0 |
| | 20.0 | 21.5 | | | | | 19.3 | | | | | | | 20.0 |
| | 22.0 | 20.6 | | | | | 18.6 | | | | | | | 22.0 |
| | 24.0 | 19.6 | | | | | 17.7 | | | | | | | 24.0 |
| | 26.0 | 18.3 | | | | | 16.8 | | | | | | | 26.0 |
| | 28.0 | 16.7 | | | | | 16.0 | | | | | | | 28.0 |
| | 30.0 | 15.3 | 16.5/30.5m | | | | 15.1 | 15.5/31.6m | | | | | | 30.0 |
| | 32.0 | 14.3 | 15.6 | | | | 14.1 | 15.3 | | | | | | 32.0 |
| | 34.0 | 13.3 | 14.7 | | | | 13.1 | 14.4 | | | | | | 34.0 |
| | 36.0 | 12.5 | 13.8 | | | | 12.3 | 13.5 | | | | | | 36.0 |
| | 38.0 | 11.8 | 13.0 | | | | 11.5 | 12.7 | | | | | | 38.0 |
| | 40.0 | 11.2 | 12.3 | | | | 10.9 | 12.0 | | | | | | 40.0 |
| | 42.0 | 10.0 | 11.6 | | | | 10.4 | 11.3 | | | | | | 42.0 |
| | 44.0 | 8.5 | 10.9 | | | | 9.4 | 10.7 | | | | | | 44.0 |
| | 46.0 | 7.1 | 10.3 | 9.8/46.7m | | | 8.1 | 10.1 | | | | | | 46.0 |
| | 48.0 | 5.2/47.8m | 9.8 | 9.6 | | | 6.7 | 9.6 | 9.1/48.3m | | | | | 48.0 |
| | 50.0 | | 9.2 | 9.2 | | | 5.2 | 9.1 | 8.8 | | | | | 50.0 |
| | 52.0 | | 8.6 | 8.8 | | | 4.6/50.7m | 8.6 | 8.4 | | | | | 52.0 |
| | 54.0 | | 8.0 | 8.4 | | | | 8.0 | 8.1 | | | | | 54.0 |
| | 56.0 | | 7.3 | 8.0 | | | | 7.5 | 7.7 | | | | | 56.0 |
| | 58.0 | | 6.8/57.3m | 7.6 | | | | 6.9 | 7.4 | | | | | 58.0 |
| 60.0 | | | 7.2 | 6.2/61.5m | | | 6.2 | 7.0 | | | | | 60.0 | |
| 62.0 | | | 6.7 | 6.1 | | | 6.1/60.2m | 6.7 | | | 5.7/63.6m | | 62.0 | |
| 64.0 | | | 6.5 | 5.8 | | | | 6.4 | | | 5.6 | | 64.0 | |
| 66.0 | | | 5.9 | 5.5 | | | | 5.9 | | | 5.4 | | 66.0 | |
| 68.0 | | | 5.6/66.4m | 5.3 | | | | 5.4 | | | 5.1 | | 68.0 | |
| 70.0 | | | | 5.0 | | | | 5.1/69.4m | | | 4.9 | | 70.0 | |
| 72.0 | | | | 4.8 | | | | | | | 4.7 | | 72.0 | |
| 74.0 | | | | 4.4 | | | | | | | 4.4 | | 74.0 | |
| 76.0 | | | | 4.1/75.0m | | | | | | | 4.0 | | 76.0 | |
| 78.0 | | | | | | | | | | | 4.0/77.9m | | 78.0 | |
| 接地 | 前方自立時 | 36.8 t/m ² | | | | | | | | 35.0 t/m ² | | | | 前方自立時 |
| 接地 | 作業時最大 | 62.5 t/m ² | | | | | | | | 63.3 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

▶ タワー長さ 58.0m Mega Luffing 250

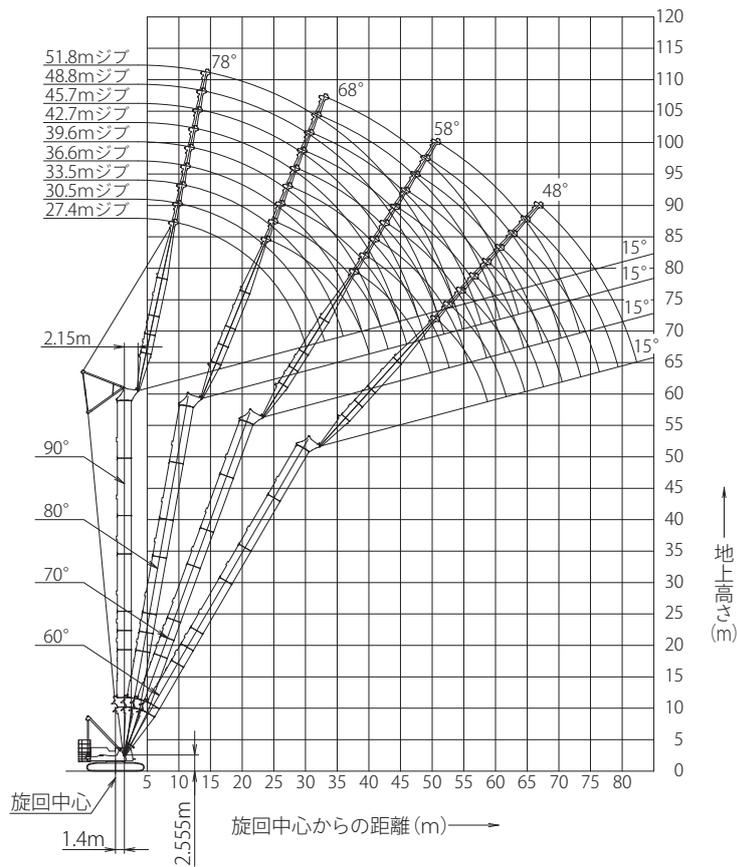

(単位：t)

| タワー長さm ジブ長さm | 27.4 | | | | 58.0 | | | | 33.5 | | | | タワー長さm ジブ長さm | |
|-----------------|------------|-----------------------|-----------|-----------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|-----------|-----------------|-------|
| | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | | |
| 9.0 | 27.0/9.5m | | | | | | | | 27.0/10.8m | | | | 9.0 | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0 | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 14.0 | |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 16.0 | |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.1 | | | | 18.0 | |
| 20.0 | 25.3 | | | | 24.6 | | | | 24.2 | | | | 20.0 | |
| 22.0 | 23.3 | | | | 22.9 | | | | 22.5 | | | | 22.0 | |
| 24.0 | 21.3 | 24.0/24.1m | | | 21.3 | 22.3/25.3m | | | 21.1 | | | | 24.0 | |
| 26.0 | 19.1 | 22.1 | | | 19.6 | 21.6 | | | 19.5 | 20.7/26.4m | | | 26.0 | |
| 28.0 | 16.4 | 20.4 | | | 17.8 | 19.9 | | | 17.8 | 19.5 | | | 28.0 | |
| 30.0 | 11.5 | 18.9 | | | 15.6 | 18.5 | | | 16.2 | 18.1 | | | 30.0 | |
| 32.0 | 11.1/30.1m | 17.5 | | | 12.1 | 17.2 | | | 14.7 | 16.9 | | | 32.0 | |
| 34.0 | | 16.2 | | | 9.8/33.1m | 16.0 | | | 12.0 | 15.7 | | | 34.0 | |
| 36.0 | | 14.9 | | | | 14.9 | | | 8.6 | 14.7 | | | 36.0 | |
| 38.0 | | 13.6 | 14.4 | | | 13.9 | 13.8/39.6m | | | 13.8 | | | 38.0 | |
| 40.0 | | 12.0 | 13.6 | | | 12.7 | 13.6 | | | 12.8 | 12.6/41.3m | | 40.0 | |
| 42.0 | | 11.8/40.2m | 12.7 | | | 11.6 | 12.7 | | | 11.9 | 12.4 | | 42.0 | |
| 44.0 | | | 11.7 | | | 10.6/43.1m | 11.7 | | | 10.9 | 11.7 | | 44.0 | |
| 46.0 | | | 11.1 | | | | 11.1 | | | 9.7 | 11.1 | | 46.0 | |
| 48.0 | | | 10.4 | | | | 10.4 | | | | 10.4 | | 48.0 | |
| 50.0 | | | 9.8/49.8m | 9.1/50.8m | | | 9.7 | | | | 9.7 | | 50.0 | |
| 52.0 | | | | 8.8 | | | 9.1 | 8.3/52.9m | | | 9.1 | | 52.0 | |
| 54.0 | | | | 8.4 | | | 8.6/52.8m | 8.1 | | | 8.4 | 7.6/54.9m | 54.0 | |
| 56.0 | | | | 8.0 | | | | 7.7 | | | 8.1/55.7m | 7.4 | 56.0 | |
| 58.0 | | | | 7.6 | | | | 7.3 | | | | 7.0 | 58.0 | |
| 60.0 | | | | 7.4/58.8m | | | | 7.0 | | | | 6.7 | 60.0 | |
| 62.0 | | | | | | | | 6.7/61.8m | | | | 6.4 | 62.0 | |
| 64.0 | | | | | | | | | | | | 6.1 | 64.0 | |
| 66.0 | | | | | | | | | | | | 5.9/64.7m | 66.0 | |
| 接地圧 | 前方自立時 | 43.0 t/m ² | | | | 44.0 t/m ² | | | | 44.9 t/m ² | | | | 前方自立時 |
| | 作業時最大 | 61.3 t/m ² | | | | 61.9 t/m ² | | | | 62.3 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

(単位：t)

| タワー長さm | | 58.0 | | | | | | | | | | | | タワー長さm |
|---------|-------|-----------------------|------------|------------|-----------|-----------------------|------------|------------|-----------|-----------------------|------------|-----------|-----------|--------|
| ジブ長さm | | 36.6 | | | | 39.6 | | | | 42.7 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径(m) | 10.0 | 27.0/11.4m | | | | | | | | | | | | 10.0 |
| | 12.0 | 27.0 | | | | 27.0/12.1m | | | | 26.4/12.7m | | | | 12.0 |
| | 14.0 | 27.0 | | | | 27.0 | | | | 26.4 | | | | 14.0 |
| | 16.0 | 26.4 | | | | 26.4 | | | | 25.2 | | | | 16.0 |
| | 18.0 | 25.9 | | | | 25.5 | | | | 24.2 | | | | 18.0 |
| | 20.0 | 24.0 | | | | 23.8 | | | | 23.2 | | | | 20.0 |
| | 22.0 | 22.2 | | | | 22.0 | | | | 21.8 | | | | 22.0 |
| | 24.0 | 20.6 | | | | 20.4 | | | | 20.3 | | | | 24.0 |
| | 26.0 | 19.1 | 19.5/27.6m | | | 18.7 | | | | 18.5 | | | | 26.0 |
| | 28.0 | 17.8 | 19.1 | | | 17.2 | 18.2/28.1m | | | 16.9 | 17.0/29.8m | | | 28.0 |
| | 30.0 | 16.5 | 17.8 | | | 16.1 | 17.4 | | | 15.6 | 16.9 | | | 30.0 |
| | 32.0 | 15.2 | 16.6 | | | 15.0 | 16.2 | | | 14.6 | 15.8 | | | 32.0 |
| | 34.0 | 13.9 | 15.5 | | | 13.9 | 15.2 | | | 13.6 | 14.7 | | | 34.0 |
| | 36.0 | 11.6 | 14.6 | | | 12.8 | 14.3 | | | 12.8 | 13.9 | | | 36.0 |
| | 38.0 | 9.1 | 13.6 | | | 11.1 | 13.4 | | | 12.0 | 13.1 | | | 38.0 |
| | 40.0 | 7.7/39.0m | 12.8 | | | 9.1 | 12.6 | | | 10.6 | 12.3 | | | 40.0 |
| | 42.0 | | 11.9 | 11.7/42.9m | | 6.8/41.9m | 11.9 | | | 8.8 | 11.6 | | | 42.0 |
| | 44.0 | | 11.1 | 11.4 | | | 11.1 | 10.8/44.5m | | 6.9 | 10.9 | | | 44.0 |
| | 46.0 | | 10.3 | 10.8 | | | 10.4 | 10.4 | | 5.9/44.8m | 10.3 | 9.9/46.1m | | 46.0 |
| | 48.0 | | 9.4 | 10.3 | | | 9.7 | 10.0 | | | 9.7 | 9.6 | | 48.0 |
| | 50.0 | | 8.8/49.0m | 9.7 | | | 9.0 | 9.6 | | | 9.1 | 9.2 | | 50.0 |
| | 52.0 | | | 9.1 | | | 8.0/51.9m | 9.1 | | | 8.4 | 8.8 | | 52.0 |
| | 54.0 | | | 8.4 | | | | 8.4 | | | 7.6 | 8.4 | | 54.0 |
| | 56.0 | | | 8.1 | 7.0/56.9m | | | 8.1 | | | 7.2/54.9m | 8.0 | | 56.0 |
| | 58.0 | | | 7.7 | 6.9 | | | 7.7 | 6.5/59.0m | | | 7.6 | | 58.0 |
| | 60.0 | | | 7.3/58.7m | 6.5 | | | 7.1 | 6.3 | | | 7.1 | 5.9/61.0m | 60.0 |
| | 62.0 | | | | 6.2 | | | 6.8/61.6m | 6.0 | | | 6.7 | 5.7 | 62.0 |
| | 64.0 | | | | 5.9 | | | | 5.7 | | | 6.2 | 5.5 | 64.0 |
| 66.0 | | | | 5.6 | | | | 5.5 | | | 5.9/64.5m | 5.2 | 66.0 | |
| 68.0 | | | | 5.4/67.7m | | | | 5.2 | | | | 4.9 | 68.0 | |
| 70.0 | | | | | | | | 5.0 | | | | 4.8 | 70.0 | |
| 72.0 | | | | | | | | 4.8/70.6m | | | | 4.6 | 72.0 | |
| 74.0 | | | | | | | | | | | | 4.4/73.5m | 74.0 | |
| 接地点 | 前方自立時 | 45.1 t/m ² | | | | 45.1 t/m ² | | | | 45.5 t/m ² | | | | 前方自立時 |
| | 作業時最大 | 62.5 t/m ² | | | | 63.4 t/m ² | | | | 64.8 t/m ² | | | | 作業時最大 |


※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

(単位：t)

| タワー長さm | | 58.0 | | | | | | | | | | | | タワー長さm |
|---------|-------|-----------------------|------------|-----------|-----------|-----------------------|------------|-----------|-----------|-----------------------|------------|-----------|-----------|--------|
| ジブ長さm | | 45.7 | | | | 48.8 | | | | 51.8 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径(m) | 12.0 | 24.7/13.3m | | | | | | | | | | | | 12.0 |
| | 14.0 | 24.5 | | | | 21.3 | | | | 18.4/14.6m | | | | 14.0 |
| | 16.0 | 23.5 | | | | 20.5 | | | | 17.9 | | | | 16.0 |
| | 18.0 | 22.5 | | | | 19.8 | | | | 17.3 | | | | 18.0 |
| | 20.0 | 21.5 | | | | 19.3 | | | | 16.7 | | | | 20.0 |
| | 22.0 | 20.5 | | | | 18.5 | | | | 16.1 | | | | 22.0 |
| | 24.0 | 19.6 | | | | 17.6 | | | | 15.6 | | | | 24.0 |
| | 26.0 | 18.3 | | | | 16.8 | | | | 14.9 | | | | 26.0 |
| | 28.0 | 16.6 | | | | 16.0 | | | | 14.2 | | | | 28.0 |
| | 30.0 | 15.3 | 15.9/31.0m | | | 15.1 | | | | 13.5 | | | | 30.0 |
| | 32.0 | 14.3 | 15.4 | | | 14.0 | 15.0/32.1m | | | 12.8 | 14.1/33.3m | | | 32.0 |
| | 34.0 | 13.3 | 14.5 | | | 13.1 | 14.1 | | | 12.1 | 13.7 | | | 34.0 |
| | 36.0 | 12.5 | 13.6 | | | 12.2 | 13.3 | | | 11.4 | 12.9 | | | 36.0 |
| | 38.0 | 11.8 | 12.8 | | | 11.5 | 12.5 | | | 10.8 | 12.1 | | | 38.0 |
| | 40.0 | 11.2 | 12.1 | | | 10.9 | 11.8 | | | 10.1 | 11.4 | | | 40.0 |
| | 42.0 | 10.0 | 11.4 | | | 10.3 | 11.1 | | | 9.6 | 10.8 | | | 42.0 |
| | 44.0 | 8.5 | 10.7 | | | 9.4 | 10.5 | | | 9.0 | 10.2 | | | 44.0 |
| | 46.0 | 7.1 | 10.1 | 9.3/47.7m | | 8.1 | 9.9 | | | 8.4 | 9.7 | | | 46.0 |
| | 48.0 | 5.2/47.8m | 9.6 | 9.2 | | 6.7 | 9.5 | 8.6/49.3m | | 7.7 | 9.2 | | | 48.0 |
| | 50.0 | | 9.0 | 8.8 | | 5.2 | 8.9 | 8.5 | | 6.4 | 8.7 | 7.9/51.0m | | 50.0 |
| | 52.0 | | 8.5 | 8.4 | | 4.7/50.7m | 8.4 | 8.1 | | 5.1 | 8.2 | 7.7 | | 52.0 |
| | 54.0 | | 7.9 | 8.1 | | | 7.9 | 7.8 | | 4.0/53.7m | 7.8 | 7.4 | | 54.0 |
| | 56.0 | | 7.3 | 7.7 | | | 7.4 | 7.4 | | | 7.3 | 7.1 | | 56.0 |
| | 58.0 | | 6.6/57.8m | 7.4 | | | 6.8 | 7.1 | | | 6.8 | 6.8 | | 58.0 |
| | 60.0 | | | 7.0 | | | 6.2 | 6.8 | | | 6.4 | 6.5 | | 60.0 |
| | 62.0 | | | 6.7 | 5.4/63.1m | | 5.9/60.8m | 6.5 | | | 5.8 | 6.2 | | 62.0 |
| | 64.0 | | | 6.3 | 5.3 | | | 6.2 | 4.9/65.1m | | 5.3/63.7m | 5.9 | | 64.0 |
| | 66.0 | | | 5.8 | 5.0 | | | 5.8 | 4.9 | | | 5.6 | 4.5/67.1m | 66.0 |
| 68.0 | | | 5.5/67.5m | 4.9 | | | 5.5 | 4.7 | | | 5.3 | 4.4 | 68.0 | |
| 70.0 | | | 4.6 | | | | 5.1 | 4.4 | | | 5.0 | 4.2 | 70.0 | |
| 72.0 | | | 4.4 | | | | 5.0/70.4m | 4.2 | | | 4.7 | 4.0 | 72.0 | |
| 74.0 | | | 4.2 | | | | | 4.0 | | | 4.5/73.4m | 3.7 | 74.0 | |
| 76.0 | | | 4.0 | | | | | 3.8 | | | | 3.6 | 76.0 | |
| 78.0 | | | 3.9/76.5m | | | | | 3.6 | | | | 3.4 | 78.0 | |
| 80.0 | | | | | | | | 3.5/79.4m | | | | 3.2 | 80.0 | |
| 82.0 | | | | | | | | | | | | 3.1 | 82.0 | |
| 84.0 | | | | | | | | | | | | 3.1/82.4m | 84.0 | |
| 接地点 | 前方自立時 | 45.1 t/m ² | | | | 43.9 t/m ² | | | | 41.7 t/m ² | | | | 前方自立時 |
| | 作業時最大 | 65.2 t/m ² | | | | 65.6 t/m ² | | | | 67.7 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

▶ タワー長さ 61.0m Mega Luffing 250

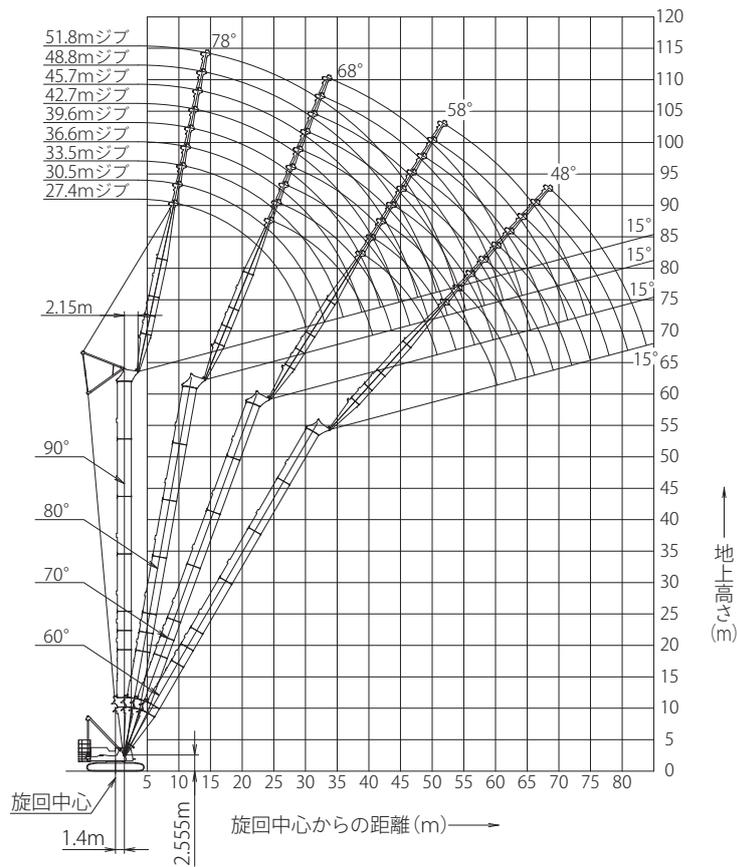

(単位：t)

| タワー長さm ジブ長さm | 61.0 | | | | 30.5 | | | | 33.5 | | | | タワー長さm ジブ長さm | |
|-----------------|------------|-----------------------|------------|-----|------------|-----------------------|------------|-----------|------------|-----------------------|------------|-----------|-----------------|-------|
| | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | | |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | 9.0 | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 14.0 | |
| 16.0 | 27.0 | | | | 27.0 | | | | 26.4 | | | | 16.0 | |
| 18.0 | 26.4 | | | | 26.4 | | | | 26.1 | | | | 18.0 | |
| 20.0 | 24.6 | | | | 24.4 | | | | 24.1 | | | | 20.0 | |
| 22.0 | 22.9 | | | | 22.6 | | | | 22.4 | | | | 22.0 | |
| 24.0 | 20.8 | 23.3/24.7m | | | 21.0 | 21.6/25.8m | | | 20.8 | | | | 24.0 | |
| 26.0 | 18.7 | 21.9 | | | 19.2 | 21.4 | | | 19.0 | 20.1/26.9m | | | 26.0 | |
| 28.0 | 16.4 | 20.2 | | | 17.3 | 19.7 | | | 17.5 | 19.4 | | | 28.0 | |
| 30.0 | 11.5 | 18.8 | | | 15.5 | 18.4 | | | 16.0 | 17.9 | | | 30.0 | |
| 32.0 | 11.2/30.1m | 17.4 | | | 12.1 | 17.1 | | | 14.6 | 16.7 | | | 32.0 | |
| 34.0 | | 16.1 | | | 9.8/33.1m | 15.9 | | | 12.0 | 15.6 | | | 34.0 | |
| 36.0 | | 14.8 | | | | 14.8 | | | 8.7 | 14.6 | | | 36.0 | |
| 38.0 | | 13.6 | 14.0/39.1m | | | 13.8 | | | | 13.7 | | | 38.0 | |
| 40.0 | | 12.2 | 13.5 | | | 12.7 | 13.1/40.7m | | | 12.7 | | | 40.0 | |
| 42.0 | | 11.5/40.7m | 12.7 | | | 11.6 | 12.6 | | | 11.8 | 12.0/42.3m | | 42.0 | |
| 44.0 | | | 12.1 | | | 10.4/43.6m | 11.9 | | | 10.8 | 11.5 | | 44.0 | |
| 46.0 | | | 11.1 | | | | 11.1 | | | 9.8 | 10.9 | | 46.0 | |
| 48.0 | | | 10.3 | | | | 10.3 | | | 9.4/46.6m | 10.3 | | 48.0 | |
| 50.0 | | | 9.8 | | | | 9.8 | | | | 9.8 | | 50.0 | |
| 52.0 | | 9.3/50.9m | 8.1/52.3m | | | | 9.1 | | | | 9.1 | | 52.0 | |
| 54.0 | | | 7.8 | | | | 8.7/53.8m | 7.4/54.4m | | | 8.6 | | 54.0 | |
| 56.0 | | | 7.4 | | | | | 7.1 | | | 8.0 | 6.7/56.4m | 56.0 | |
| 58.0 | | | 7.0 | | | | | 6.7 | | | 7.8/56.8m | 6.5 | 58.0 | |
| 60.0 | | | 6.7 | | | | | 6.4 | | | | 6.1 | 60.0 | |
| 62.0 | | | 6.6/60.3m | | | | | 6.1 | | | | 5.8 | 62.0 | |
| 64.0 | | | | | | | | 5.9/63.3m | | | | 5.6 | 64.0 | |
| 66.0 | | | | | | | | | | | | 5.3 | 66.0 | |
| 68.0 | | | | | | | | | | | | 5.3/66.2m | 68.0 | |
| 接 地 圧 | 前方自立時 | 51.3 t/m ² | | | | 52.8 t/m ² | | | | 54.2 t/m ² | | | | 前方自立時 |
| | 作業時最大 | 61.7 t/m ² | | | | 61.9 t/m ² | | | | 62.9 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

(単位：t)

| タワー長さm | 61.0 | | | | | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|-----------|------------|-----------------------|-----------|-----------|--------|-------|
| ジブ長さm | 36.6 | | | | 39.6 | | | | 42.7 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 10.0 | 27.0/11.4m | | | | | | | | | | | | 10.0 | |
| 12.0 | 27.0 | | | | 26.4/12.1m | | | | 25.5/12.7m | | | | 12.0 | |
| 14.0 | 26.4 | | | | 26.0 | | | | 24.6 | | | | 14.0 | |
| 16.0 | 26.0 | | | | 24.7 | | | | 23.5 | | | | 16.0 | |
| 18.0 | 24.9 | | | | 23.8 | | | | 22.4 | | | | 18.0 | |
| 20.0 | 24.0 | | | | 22.8 | | | | 21.5 | | | | 20.0 | |
| 22.0 | 22.2 | | | | 22.0 | | | | 20.7 | | | | 22.0 | |
| 24.0 | 20.6 | | | | 20.4 | | | | 20.0 | | | | 24.0 | |
| 26.0 | 18.9 | | | | 18.7 | | | | 18.4 | | | | 26.0 | |
| 28.0 | 17.6 | 18.9/28.1m | | | 17.2 | 17.7/29.2m | | | 16.8 | | | | 28.0 | |
| 30.0 | 16.5 | 17.6 | | | 16.1 | 17.2 | | | 15.6 | 16.5/30.4m | | | 30.0 | |
| 32.0 | 15.2 | 16.4 | | | 15.0 | 16.0 | | | 14.6 | 15.6 | | | 32.0 | |
| 34.0 | 13.9 | 15.3 | | | 13.9 | 15.0 | | | 13.6 | 14.7 | | | 34.0 | |
| 36.0 | 11.7 | 14.4 | | | 12.8 | 14.1 | | | 12.7 | 13.7 | | | 36.0 | |
| 38.0 | 9.2 | 13.5 | | | 11.2 | 13.3 | | | 11.9 | 12.9 | | | 38.0 | |
| 40.0 | 7.7/39.0m | 12.6 | | | 9.1 | 12.5 | | | 10.6 | 12.2 | | | 40.0 | |
| 42.0 | | 11.8 | 11.1/43.9m | | 6.8/41.9m | 11.7 | | | 8.8 | 11.4 | | | 42.0 | |
| 44.0 | | 11.0 | 11.1 | | | 11.0 | 10.3/45.5m | | 6.9 | 10.8 | | | 44.0 | |
| 46.0 | | 10.2 | 10.5 | | | 10.3 | 10.1 | | 5.9/44.8m | 10.1 | 9.5/47.1m | | 46.0 | |
| 48.0 | | 9.4 | 10.0 | | | 9.7 | 9.8 | | | 9.6 | 9.3 | | 48.0 | |
| 50.0 | | 8.6/49.5m | 9.6 | | | 8.9 | 9.3 | | | 9.0 | 8.9 | | 50.0 | |
| 52.0 | | | 9.1 | | | 8.0 | 8.9 | | | 8.3 | 8.5 | | 52.0 | |
| 54.0 | | | 8.6 | | | 7.8/52.5m | 8.5 | | | 7.6 | 8.1 | | 54.0 | |
| 56.0 | | | 8.0 | | | | 8.0 | | | 7.0/55.4m | 7.7 | | 56.0 | |
| 58.0 | | | 7.7 | 6.2/58.5m | | | 7.6 | | | | 7.4 | | 58.0 | |
| 60.0 | | | 7.1/59.7m | 6.0 | | | 7.2 | 5.7/60.5m | | | 7.0 | | 60.0 | |
| 62.0 | | | | 5.7 | | | 6.6 | 5.5 | | | 6.6 | 5.2/62.5m | 62.0 | |
| 64.0 | | | | 5.4 | | | 6.4/62.6m | 5.2 | | | 6.2 | 5.0 | 64.0 | |
| 66.0 | | | | 5.1 | | | | 4.9 | | | 5.8/65.6m | 4.8 | 66.0 | |
| 68.0 | | | | 4.9 | | | | 4.8 | | | | 4.5 | 68.0 | |
| 70.0 | | | | 4.8/69.2m | | | | 4.6 | | | | 4.3 | 70.0 | |
| 72.0 | | | | | | | | 4.4 | | | | 4.1 | 72.0 | |
| 74.0 | | | | | | | | 4.4/72.1m | | | | 3.9 | 74.0 | |
| 76.0 | | | | | | | | | | | | 3.8/75.1m | 76.0 | |
| 接地 | 前方自立時 | 54.6 t/m ² | | | | 54.8 t/m ² | | | | 55.7 t/m ² | | | | 前方自立時 |
| 接地 | 作業時最大 | 63.7 t/m ² | | | | 65.2 t/m ² | | | | 65.3 t/m ² | | | | 作業時最大 |


※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

(単位：t)

| タワー長さm | 61.0 | | | | | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|-----------|-----------|-----------|-----------------------|-----------|-----------|------------|-----------------------|-----------|-----------|--------|-------|
| ジブ長さm | 45.7 | | | | 48.8 | | | | 51.8 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 12.0 | 23.9/13.3m | | | | | | | | | | | | 12.0 | |
| 14.0 | 23.5 | | | | 21.2 | | | | 18.4/14.6m | | | | 14.0 | |
| 16.0 | 22.3 | | | | 20.5 | | | | 17.9 | | | | 16.0 | |
| 18.0 | 21.3 | | | | 19.8 | | | | 17.3 | | | | 18.0 | |
| 20.0 | 20.4 | | | | 19.2 | | | | 16.7 | | | | 20.0 | |
| 22.0 | 19.6 | | | | 18.5 | | | | 16.1 | | | | 22.0 | |
| 24.0 | 19.0 | | | | 17.6 | | | | 15.6 | | | | 24.0 | |
| 26.0 | 18.3 | | | | 16.8 | | | | 14.9 | | | | 26.0 | |
| 28.0 | 16.6 | | | | 15.9 | | | | 14.2 | | | | 28.0 | |
| 30.0 | 15.3 | 15.2/31.5m | | | 15.0 | | | | 13.5 | | | | 30.0 | |
| 32.0 | 14.3 | 15.1 | | | 14.0 | 14.0/32.7m | | | 12.8 | 12.7/33.8m | | | 32.0 | |
| 34.0 | 13.3 | 14.3 | | | 13.0 | 13.7 | | | 12.1 | 12.6 | | | 34.0 | |
| 36.0 | 12.5 | 13.4 | | | 12.2 | 13.1 | | | 11.4 | 12.2 | | | 36.0 | |
| 38.0 | 11.8 | 12.6 | | | 11.5 | 12.3 | | | 10.7 | 11.9 | | | 38.0 | |
| 40.0 | 11.1 | 11.9 | | | 10.9 | 11.6 | | | 10.1 | 11.2 | | | 40.0 | |
| 42.0 | 9.9 | 11.2 | | | 10.3 | 11.0 | | | 9.6 | 10.6 | | | 42.0 | |
| 44.0 | 8.5 | 10.6 | | | 9.4 | 10.3 | | | 9.0 | 10.0 | | | 44.0 | |
| 46.0 | 7.0 | 10.0 | | | 8.1 | 9.8 | | | 8.4 | 9.6 | | | 46.0 | |
| 48.0 | 5.2/47.8m | 9.5 | 8.8/48.8m | | 6.7 | 9.3 | | | 7.6 | 9.1 | | | 48.0 | |
| 50.0 | | 8.9 | 8.5 | | 5.2 | 8.8 | 8.1/50.4m | | 6.4 | 8.6 | | | 50.0 | |
| 52.0 | | 8.4 | 8.2 | | 4.7/50.7m | 8.3 | 7.8 | | 5.1 | 8.1 | 7.4 | | 52.0 | |
| 54.0 | | 7.8 | 7.8 | | | 7.8 | 7.5 | | 4.0/53.7m | 7.6 | 7.1 | | 54.0 | |
| 56.0 | | 7.2 | 7.5 | | | 7.3 | 7.2 | | | 7.2 | 6.8 | | 56.0 | |
| 58.0 | | 6.5 | 7.1 | | | 6.8 | 6.9 | | | 6.7 | 6.5 | | 58.0 | |
| 60.0 | | 6.4/58.4m | 6.8 | | | 6.2 | 6.6 | | | 6.3 | 6.2 | | 60.0 | |
| 62.0 | | | 6.5 | | | 5.8/61.3m | 6.3 | | | 5.8 | 6.0 | | 62.0 | |
| 64.0 | | | 6.1 | 4.8/64.6m | | | 6.0 | | | 5.2 | 5.7 | | 64.0 | |
| 66.0 | | | 5.8 | 4.6 | | | 5.7 | | | 5.1/64.2m | 5.4 | | 66.0 | |
| 68.0 | | | 5.3 | 4.3 | | | 5.3 | 4.1 | | | 5.1 | 3.8/68.7m | 68.0 | |
| 70.0 | | | 5.1/68.5m | 4.1 | | | 5.0 | 3.9 | | | 4.9 | 3.7 | 70.0 | |
| 72.0 | | | | 3.9 | | | 4.8/71.5m | 3.7 | | | 4.7 | 3.4 | 72.0 | |
| 74.0 | | | | 3.7 | | | | 3.5 | | | 4.3 | 3.2 | 74.0 | |
| 76.0 | | | | 3.5 | | | | 3.4 | | | 4.2/74.4m | 3.0 | 76.0 | |
| 78.0 | | | | 3.5 | | | | 3.2 | | | | 2.9 | 78.0 | |
| 80.0 | | | | | | | | 3.0 | | | | | 80.0 | |
| 82.0 | | | | | | | | 3.0/81.0m | | | | | 82.0 | |
| 接地 | 前方自立時 | 55.5 t/m ² | | | | 54.6 t/m ² | | | | 53.7 t/m ² | | | | 前方自立時 |
| 接地 | 作業時最大 | 67.6 t/m ² | | | | 67.0 t/m ² | | | | 65.4 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

▶ タワー長さ 64.1m Mega Luffing 250

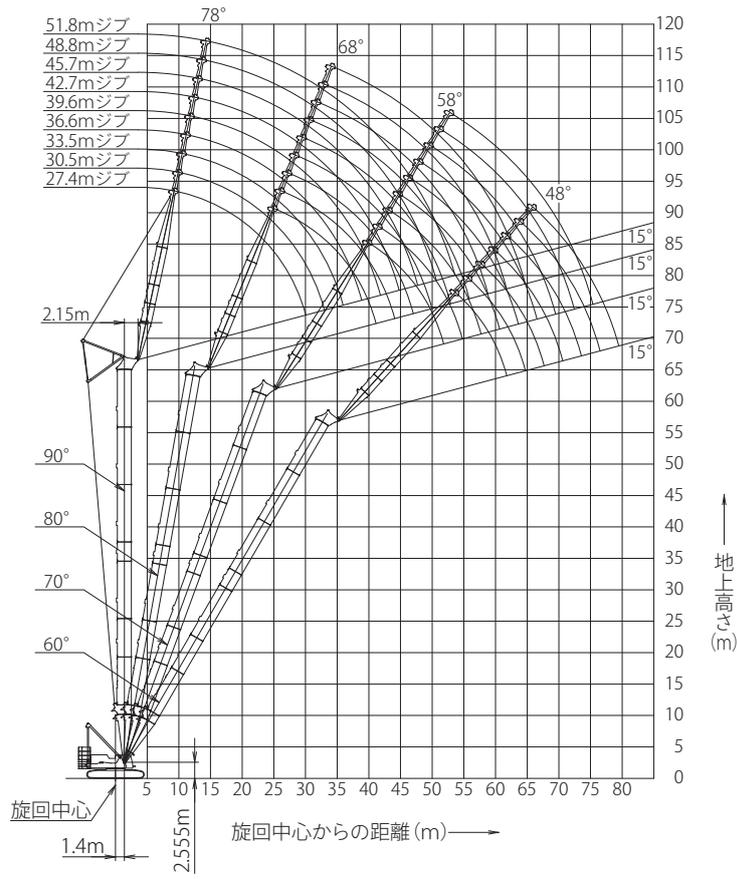


(単位：t)

| タワー長さm ジブ長さm | 27.4 | | | | 30.5 | | | | 33.5 | | | | タワー長さm ジブ長さm |
|-----------------|-----------------------|------------|------------|-----------|-----------------------|------------|------------|-----------|-----------------------|------------|------------|-----|-----------------|
| | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | 9.0 |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 26.4/10.8m | | | | 10.0 |
| 12.0 | 27.0 | | | | 27.0 | | | | 26.4 | | | | 12.0 |
| 14.0 | 27.0 | | | | 27.0 | | | | 26.4 | | | | 14.0 |
| 16.0 | 27.0 | | | | 26.4 | | | | 25.3 | | | | 16.0 |
| 18.0 | 26.4 | | | | 25.7 | | | | 24.4 | | | | 18.0 |
| 20.0 | 24.6 | | | | 24.4 | | | | 23.5 | | | | 20.0 |
| 22.0 | 22.9 | | | | 22.6 | | | | 22.3 | | | | 22.0 |
| 24.0 | 20.8 | 22.6/25.2m | | | 20.9 | | | | 20.7 | | | | 24.0 |
| 26.0 | 18.7 | 21.8 | | | 19.1 | 20.9/26.3m | | | 19.0 | 19.2/27.5m | | | 26.0 |
| 28.0 | 16.5 | 20.0 | | | 17.3 | 19.6 | | | 17.5 | 19.0 | | | 28.0 |
| 30.0 | 11.6 | 18.6 | | | 15.5 | 18.2 | | | 16.0 | 17.8 | | | 30.0 |
| 32.0 | 11.2/30.1m | 17.2 | | | 12.5 | 16.9 | | | 14.5 | 16.5 | | | 32.0 |
| 34.0 | | 15.9 | | | 9.8/33.1m | 15.7 | | | 12.0 | 15.4 | | | 34.0 |
| 36.0 | | 14.7 | | | | 14.7 | | | 8.7 | 14.5 | | | 36.0 |
| 38.0 | | 13.6 | | | | 13.7 | | | | 13.5 | | | 38.0 |
| 40.0 | | 12.3 | 13.4/40.1m | | | 12.6 | 12.4/41.7m | | | 12.6 | | | 40.0 |
| 42.0 | | 11.2/41.2m | 12.7 | | | 11.6 | 12.3 | | | 11.7 | 11.4/43.3m | | 42.0 |
| 44.0 | | | 11.6 | | | 10.2 | 11.6 | | | 10.8 | 11.2 | | 44.0 |
| 46.0 | | | 10.8 | | | 10.1/44.2m | 10.8 | | | 9.8 | 10.6 | | 46.0 |
| 48.0 | | | 10.3 | | | | 10.3 | | | 9.2/47.1m | 10.1 | | 48.0 |
| 50.0 | | | 9.6 | | | | 9.6 | | | 9.6 | | | 50.0 |
| 52.0 | | | 9.2/51.9m | 7.1/53.9m | | | 9.2 | | | 9.2 | | | 52.0 |
| 54.0 | | | | 7.1 | | | 8.6 | 6.5/55.9m | | 8.6 | | | 54.0 |
| 56.0 | | | | 6.7 | | | 8.1/54.9m | 6.5 | | 8.0 | 5.8/57.9m | | 56.0 |
| 58.0 | | | | 6.4 | | | | 6.1 | | 7.4/57.8m | 5.8 | | 58.0 |
| 60.0 | | | | 6.1 | | | | 5.8 | | | 5.5 | | 60.0 |
| 62.0 | | | | 5.8/61.9m | | | | 5.5 | | | 5.3 | | 62.0 |
| 64.0 | | | | | | | | 5.3 | | | 5.0 | | 64.0 |
| 66.0 | | | | | | | | 5.2/64.8m | | | 4.8 | | 66.0 |
| 68.0 | | | | | | | | | | | 4.6/67.8m | | 68.0 |
| 接地 前方自立時 | 64.3 t/m ² | | | | 66.9 t/m ² | | | | 69.4 t/m ² | | | | 前方自立時 |
| 接地 作業時最大 | 61.8 t/m ² | | | | 62.8 t/m ² | | | | 63.6 t/m ² | | | | 接地 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

▶ タワー長さ 36.6m (200t 級能力)

(94.5t カウンタウエイト / カーボディウエイトあり) (オプション)



(単位: t)

| タワー長さm | 36.6 | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|------------|------------|------------|-----------------------|------------|-----------|--------|-------|
| ジブ長さm | 27.4 | | | | 30.5 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 9.0 | 27.0/9.5m | | | | | | | | 9.0 | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 14.0 | |
| 16.0 | 27.0 | | | | 27.0 | | | | 16.0 | |
| 18.0 | 27.0 | | | | 26.4 | | | | 18.0 | |
| 20.0 | 25.3 | 26.4/20.4m | | | 24.6 | 26.4/21.6m | | | 20.0 | |
| 22.0 | 23.3 | 26.4 | | | 22.9 | 26.4 | | | 22.0 | |
| 24.0 | 21.3 | 25.5 | | | 21.3 | 25.1 | | | 24.0 | |
| 26.0 | 19.4 | 23.2 | | | 19.6 | 23.2 | | | 26.0 | |
| 28.0 | 15.8 | 21.2 | | | 17.8 | 21.2 | | | 28.0 | |
| 30.0 | 10.9 | 19.4 | 18.0/30.7m | | 15.2 | 19.4 | | | 30.0 | |
| 32.0 | 10.4/30.1m | 18.0 | 17.1 | | 11.6 | 18.0 | 16.7/32.3m | | 32.0 | |
| 34.0 | | 16.5 | 15.8 | | 9.3/33.1m | 16.7 | 15.7 | | 34.0 | |
| 36.0 | | 14.5 | 14.8 | | | 15.5 | 14.7 | | 36.0 | |
| 38.0 | | 13.5/36.5m | 13.7 | | | 14.0 | 13.6 | | 38.0 | |
| 40.0 | | | 12.9 | 11.9/40.1m | | 11.9/39.4m | 12.8 | | 40.0 | |
| 42.0 | | | 12.1 | 11.1 | | | 12.0 | | 42.0 | |
| 44.0 | | | 11.8/42.5m | 10.4 | | | 11.2 | 10.3 | 44.0 | |
| 46.0 | | | | 9.9 | | | 10.8/45.5m | 9.7 | 46.0 | |
| 48.0 | | | | 9.2 | | | | 9.0 | 48.0 | |
| 50.0 | | | | 9.1/48.2m | | | | 8.5 | 50.0 | |
| 52.0 | | | | | | | | 8.2/51.1m | 52.0 | |
| 接地圧 | 前方自立時 | 17.0 t/m ² | | | | 16.5 t/m ² | | | | 前方自立時 |
| 接地圧 | 作業時最大 | 40.6 t/m ² | | | | 40.7 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

▶ タワー長さ 39.7m (200t 級能力)

(94.5t カウンタウエイト / カーボディウエイトあり) (オプション)



(単位: t)

| タワー長さm | 39.7 | | | | | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|------------|------------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|-----------|--------|-------|
| ジブ長さm | 27.4 | | | | 30.5 | | | | 33.5 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | 9.0 | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 14.0 | |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 16.0 | |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.2 | | | | 18.0 | |
| 20.0 | 25.3 | 26.4/21.0m | | | 24.6 | | | | 24.3 | | | | 20.0 | |
| 22.0 | 23.3 | 26.4 | | | 22.9 | 26.4/22.1m | | | 22.5 | 25.0/23.2m | | | 22.0 | |
| 24.0 | 21.3 | 25.2 | | | 21.3 | 24.8 | | | 21.1 | 24.3 | | | 24.0 | |
| 26.0 | 19.4 | 23.1 | | | 19.6 | 22.9 | | | 19.5 | 22.4 | | | 26.0 | |
| 28.0 | 15.9 | 21.1 | | | 17.8 | 21.1 | | | 17.8 | 20.8 | | | 28.0 | |
| 30.0 | 11.0 | 19.4 | 17.0/31.8m | | 15.3 | 19.4 | | | 16.3 | 19.4 | | | 30.0 | |
| 32.0 | 10.6/30.1m | 18.0 | 16.8 | | 11.7 | 18.0 | 15.8/33.4m | | 14.6 | 18.0 | | | 32.0 | |
| 34.0 | | 16.5 | 15.5 | | 9.5/33.1m | 16.7 | 15.4 | | 11.6 | 16.7 | 14.8/35.0m | | 34.0 | |
| 36.0 | | 14.7 | 14.5 | | | 15.4 | 14.4 | | 8.3 | 15.6 | 14.3 | | 36.0 | |
| 38.0 | | 13.6/37.0m | 13.5 | | | 14.1 | 13.4 | | | 14.5 | 13.3 | | 38.0 | |
| 40.0 | | | 12.6 | 10.3/41.7m | | 12.0/39.9m | 12.6 | | | 13.2 | 12.5 | | 40.0 | |
| 42.0 | | | 11.8 | 10.0 | | | 11.7 | | | 11.9 | 11.6 | | 42.0 | |
| 44.0 | | | 11.3/43.6m | 9.3 | | | 11.1 | 9.4 | | 10.6/42.9m | 10.9 | 8.6/45.8m | 44.0 | |
| 46.0 | | | | 8.8 | | | 10.3 | 8.7 | | | 10.3 | 8.5 | 46.0 | |
| 48.0 | | | | 8.4 | | | 10.2/46.5m | 8.3 | | | 9.6 | 8.2 | 48.0 | |
| 50.0 | | | | 8.1/49.7m | | | | 7.9 | | | 9.2/49.5m | 7.8 | 50.0 | |
| 52.0 | | | | | | | | 7.4 | | | | 7.3 | 52.0 | |
| 54.0 | | | | | | | | 7.3/52.6m | | | | 6.9 | 54.0 | |
| 56.0 | | | | | | | | | | | | 6.7/55.6m | 56.0 | |
| 接地圧 | 前方自立時 | 20.5 t/m ² | | | | 20.4 t/m ² | | | | 19.8 t/m ² | | | | 前方自立時 |
| 接地圧 | 作業時最大 | 39.8 t/m ² | | | | 40.3 t/m ² | | | | 41.2 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

▶ タワー長さ 42.7m (200t 級能力)



(94.5t カウンタウエイト / カーボディウエイトあり) (オプション)

(単位: t)

| タワー長さm | 42.7 | | | | | | | | | | | | | | | | タワー長さm | | |
|--------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|-----------|------------|-----------------------|-----------|-----------|------|-----------------------|------------|------------|--------|-------|-----|
| ジブ長さm | 27.4 | | | | 30.5 | | | | 33.5 | | | | 36.6 | | | | ジブ長さm | | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | | |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | | | | | 9.0 | | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | | | 27.0/11.4m | | 10.0 | | |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | 27.0 | | 12.0 | | |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | 27.0 | | 14.0 | | |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | 26.4 | | 16.0 | | |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.2 | | | | | | 26.0 | | 18.0 | | |
| 20.0 | 25.3 | 26.4/21.5m | | | 24.6 | | | | 24.3 | | | | | | 24.1 | | 20.0 | | |
| 22.0 | 23.3 | 26.4 | | | 22.9 | 26.0/22.6m | | | 22.5 | 24.3/23.8m | | | | | 22.3 | | 22.0 | | |
| 24.0 | 21.3 | 25.0 | | | 21.3 | 24.5 | | | 21.1 | 24.0 | | | | | 20.7 | 22.7/24.9m | 24.0 | | |
| 26.0 | 19.2 | 23.0 | | | 19.6 | 22.6 | | | 19.5 | 22.2 | | | | | 19.1 | 21.7 | 26.0 | | |
| 28.0 | 16.0 | 21.1 | | | 17.8 | 20.9 | | | 17.8 | 20.5 | | | | | 17.8 | 20.2 | 28.0 | | |
| 30.0 | 11.2 | 19.4 | | | 15.4 | 19.4 | | | 16.3 | 19.2 | | | | | 16.5 | 18.9 | 30.0 | | |
| 32.0 | 10.7/30.1m | 17.9 | 15.9/32.8m | | 11.8 | 17.9 | | | 14.7 | 17.8 | | | | | 15.2 | 17.6 | 32.0 | | |
| 34.0 | | 16.5 | 15.2 | | 9.6/33.1m | 16.7 | 14.9/34.4m | | 11.7 | 16.6 | | | | | 13.9 | 16.4 | 34.0 | | |
| 36.0 | | 14.8 | 14.2 | | | 15.4 | 14.1 | | 8.4 | 15.4 | 13.9 | | | | 11.4 | 15.3 | 36.0 | | |
| 38.0 | | 13.3/37.5m | 13.2 | | | 14.1 | 13.1 | | | 14.4 | 13.1 | | | | 8.9 | 14.4 | 38.0 | | |
| 40.0 | | | 12.4 | | | 12.5 | 12.2 | | | 13.2 | 12.2 | | | | 7.5/39.0m | 13.4 | 40.0 | | |
| 42.0 | | | 11.5 | | | 12.0/40.5m | 11.4 | | | 12.0 | 11.3 | | | | | 12.4 | 42.0 | | |
| 44.0 | | | 10.8 | 9.2 | | | 10.8 | 8.9/45.2m | | 10.7/43.4m | 10.7 | | | | | 11.4 | 44.0 | | |
| 46.0 | | | 10.5/44.6m | 8.8 | | | 10.1 | 8.6 | | | 10.0 | 8.5/47.3m | | | | 10.1 | 46.0 | | |
| 48.0 | | | | 8.4 | | | 9.7/47.6m | 8.3 | | | 9.4 | 8.2 | | | | 9.6/46.3m | 9.4 | 48.0 | |
| 50.0 | | | | 7.9 | | | | 7.9 | | | 8.8 | 7.8 | | | | 8.8 | 7.5 | 50.0 | |
| 52.0 | | | | 7.7/51.2m | | | | 7.4 | | | 8.7/50.5m | 7.4 | | | | 8.3 | 7.3 | 52.0 | |
| 54.0 | | | | | | | | 7.0 | | | | 6.9 | | | | 8.0/53.4m | 6.9 | 54.0 | |
| 56.0 | | | | | | | | 6.9/54.1m | | | | 6.5 | | | | | 6.4 | 56.0 | |
| 58.0 | | | | | | | | | | | | 6.4/57.1m | | | | | 6.1 | 58.0 | |
| 60.0 | | | | | | | | | | | | | | | | | 5.8 | 60.0 | |
| 接地圧 | 前方自立時 | 24.1 t/m ² | | | | 24.2 t/m ² | | | | 24.1 t/m ² | | | | 23.2 t/m ² | | | | 前方自立時 | 接地圧 |
| | 作業時最大 | 42.2 t/m ² | | | | 43.2 t/m ² | | | | 44.2 t/m ² | | | | 44.6 t/m ² | | | | 作業時最大 | |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

▶ タワー長さ 45.8m (200t 級能力)



(94.5t カウンタウエイト / カーボディウエイトあり) (オプション)

(単位: t)

| タワー長さm | 45.8 | | | | | | | | | | | | | | | | タワー長さm | | | | | | |
|--------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|-----------|------|-----------------------|-----|-----|------------|-----------------------|------------|------------|-------|-------|-----|
| ジブ長さm | 27.4 | | | | 30.5 | | | | 33.5 | | | | 36.6 | | | | 39.6 | | | | ジブ長さm | | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | | |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | | | | | | | | | 9.0 | | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | | | | | 27.0/11.4m | | | | 10.0 | | |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | | | 27.0 | | | 27.0/12.1m | 12.0 | | |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | | | 27.0 | | | 27.0 | 14.0 | | |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | | | 26.4 | | | 26.4 | 16.0 | | |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.2 | | | | | | | | 26.0 | | | 25.8 | 18.0 | | |
| 20.0 | 25.3 | | | | 24.6 | | | | 24.3 | | | | | | | | 24.1 | | | 23.9 | 20.0 | | |
| 22.0 | 23.3 | 26.4 | | | 22.9 | 25.2/23.2m | | | 22.5 | | | | | | | | 22.3 | | | 22.1 | 22.0 | | |
| 24.0 | 21.3 | 24.8 | | | 21.3 | 24.4 | | | 21.1 | 23.5/24.3m | | | | | | | 20.7 | 22.0/25.4m | | 20.5 | 24.0 | | |
| 26.0 | 19.1 | 22.9 | | | 19.6 | 22.4 | | | 19.5 | 21.9 | | | | | | | 19.1 | 21.5 | | 18.8 | 26.0 | | |
| 28.0 | 16.1 | 21.0 | | | 17.8 | 20.7 | | | 17.8 | 20.3 | | | | | | | 17.8 | 19.9 | | 17.2 | 28.0 | | |
| 30.0 | 11.3 | 19.3 | | | 15.5 | 19.3 | | | 16.3 | 19.0 | | | | | | | 16.5 | 18.6 | | 16.1 | 30.0 | | |
| 32.0 | 10.9/30.1m | 17.9 | 15.0/33.9m | | 11.9 | 17.9 | | | 14.7 | 17.6 | | | | | | | 15.2 | 17.4 | | 15.0 | 32.0 | | |
| 34.0 | | 16.5 | 14.9 | | 9.7/33.1m | 16.6 | 14.1/35.5m | | 11.8 | 16.4 | | | | | | | 13.9 | 16.2 | | 14.0 | 34.0 | | |
| 36.0 | | 14.9 | 13.9 | | | 15.3 | 13.8 | | 8.5 | 15.3 | 13.2/37.1m | | | | | | 11.5 | 15.2 | | 13.0 | 36.0 | | |
| 38.0 | | 13.0 | 13.0 | | | 14.1 | 12.9 | | | 14.3 | 12.8 | | | | | | 9.0 | 14.2 | 12.4/38.7m | 11.0 | 38.0 | | |
| 40.0 | | | 12.2 | | | 12.6 | 12.0 | | | 13.2 | 12.0 | | | | | | 7.5/39.0m | 13.3 | 11.9 | 9.0 | 40.0 | | |
| 42.0 | | | 11.3 | | | 11.7/41.0m | 11.1 | | | 12.0 | 11.1 | | | | | | 12.4 | 11.0 | | 6.7/41.9m | 42.0 | | |
| 44.0 | | | 10.6 | | | | 10.5 | | | 10.6/43.9m | 10.4 | | | | | | 11.4 | 10.3 | | | 44.0 | | |
| 46.0 | | | 10.0/45.7m | 8.8 | | | 9.9 | 8.7/46.8m | | | 9.8 | | | | | | 10.3 | 9.7 | | | 46.0 | | |
| 48.0 | | | | 8.4 | | | 9.2 | 8.3 | | | 9.2 | 8.0/48.8m | | | | | 9.7/46.9m | 9.1 | | | 48.0 | | |
| 50.0 | | | | 7.9 | | | 9.1/48.6m | 7.9 | | | 8.6 | 7.8 | | | | | 8.6 | 7.5/50.8m | | 8.6/49.8m | 50.0 | | |
| 52.0 | | | | 7.5 | | | | 7.4 | | | 8.3/51.5m | 7.4 | | | | | 8.1 | 7.2 | | | 52.0 | | |
| 54.0 | | | | 7.4/52.7m | | | | 7.0 | | | | 6.9 | | | | | 7.6 | 6.8 | | | 54.0 | | |
| 56.0 | | | | | | | | 6.8/55.7m | | | | 6.5 | | | | | 7.6/54.5m | 6.4 | | | 56.0 | | |
| 58.0 | | | | | | | | | | | | 6.2 | | | | | | 6.1 | | | 58.0 | | |
| 60.0 | | | | | | | | | | | | 6.1/58.6m | | | | | | 5.8 | | | 60.0 | | |
| 62.0 | | | | | | | | | | | | | | | | | | 5.6/61.6m | | | 62.0 | | |
| 64.0 | | | | | | | | | | | | | | | | | | | | | 64.0 | | |
| 66.0 | | | | | | | | | | | | | | | | | | | | | 66.0 | | |
| 接地圧 | 前方自立時 | 27.2 t/m ² | | | | 27.4 t/m ² | | | | 27.5 t/m ² | | | | 27.2 t/m ² | | | | 26.2 t/m ² | | | | 前方自立時 | 接地圧 |
| | 作業時最大 | 44.9 t/m ² | | | | 46.4 t/m ² | | | | 47.1 t/m ² | | | | 47.8 t/m ² | | | | 48.7 t/m ² | | | | 作業時最大 | |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

(単位：t)

| タワー長さm | | 64.1 | | | | | | | | | | | | タワー長さm |
|---------|-------|-----------------------|------------|------------|-----|-----------------------|------------|-----------|-----|-----------------------|------------|-----------|-----------|--------|
| ジブ長さm | | 36.6 | | | | 39.6 | | | | 42.7 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径(m) | 10.0 | 26.4/11.4m | | | | | | | | | | | | 10.0 |
| | 12.0 | 26.4 | | | | 25.3/12.1m | | | | 23.5/12.7m | | | | 12.0 |
| | 14.0 | 25.2 | | | | 24.1 | | | | 22.7 | | | | 14.0 |
| | 16.0 | 24.2 | | | | 23.0 | | | | 21.6 | | | | 16.0 |
| | 18.0 | 23.2 | | | | 22.0 | | | | 20.7 | | | | 18.0 |
| | 20.0 | 22.3 | | | | 21.1 | | | | 19.9 | | | | 20.0 |
| | 22.0 | 21.5 | | | | 20.4 | | | | 19.2 | | | | 22.0 |
| | 24.0 | 20.6 | | | | 19.7 | | | | 18.6 | | | | 24.0 |
| | 26.0 | 18.9 | | | | 18.7 | | | | 18.0 | | | | 26.0 |
| | 28.0 | 17.4 | 17.7/28.6m | | | 17.1 | 16.3/29.8m | | | 16.8 | | | | 28.0 |
| | 30.0 | 16.3 | 17.3 | | | 15.8 | 16.2 | | | 15.5 | 14.8/30.9m | | | 30.0 |
| | 32.0 | 15.2 | 16.2 | | | 14.8 | 15.7 | | | 14.5 | 14.6 | | | 32.0 |
| | 34.0 | 14.0 | 15.1 | | | 13.9 | 14.8 | | | 13.5 | 14.2 | | | 34.0 |
| | 36.0 | 11.7 | 14.2 | | | 12.7 | 13.9 | | | 12.7 | 13.6 | | | 36.0 |
| | 38.0 | 9.2 | 13.3 | | | 11.2 | 13.1 | | | 11.8 | 12.7 | | | 38.0 |
| | 40.0 | 7.7/39.0m | 12.5 | | | 9.2 | 12.3 | | | 10.6 | 12.0 | | | 40.0 |
| | 42.0 | | 11.7 | | | 6.8/41.9m | 11.5 | | | 8.9 | 11.3 | | | 42.0 |
| | 44.0 | | 10.9 | 10.5/45.0m | | | 10.8 | | | 6.9 | 10.6 | | | 44.0 |
| | 46.0 | | 10.1 | 10.2 | | | 10.2 | 9.8/46.6m | | 5.9/44.8m | 10.0 | | | 46.0 |
| | 48.0 | | 9.4 | 9.8 | | | 9.6 | 9.5 | | | 9.5 | 9.0/48.2m | | 48.0 |
| | 50.0 | | 8.3 | 9.4 | | | 8.9 | 9.0 | | | 8.9 | 8.6 | | 50.0 |
| | 52.0 | | | 8.9 | | | 8.1 | 8.6 | | | 8.3 | 8.2 | | 52.0 |
| | 54.0 | | | 8.5 | | | 7.6/53.0m | 8.2 | | | 7.6 | 7.9 | | 54.0 |
| | 56.0 | | | 8.0 | | | | 7.8 | | | 7.0/55.9m | 7.5 | | 56.0 |
| | 58.0 | | | 7.5 | | | | 7.4 | | | | 7.1 | | 58.0 |
| | 60.0 | | | 7.0 | 5.4 | | | 7.0 | | | | 6.8 | | 60.0 |
| | 62.0 | | | 6.7/60.7m | 5.1 | | | 6.6 | 4.9 | | | 6.4 | | 62.0 |
| | 64.0 | | | | 4.9 | | | 6.1/63.7m | 4.7 | | | 6.1 | 4.4/64.1m | 64.0 |
| 66.0 | | | | 4.7 | | | | 4.5 | | | 5.6 | 4.2 | 66.0 | |
| 68.0 | | | | 4.4 | | | | 4.3 | | | 5.4/66.6m | 4.0 | 68.0 | |
| 70.0 | | | | 4.2 | | | | 4.0 | | | | 3.8 | 70.0 | |
| 72.0 | | | | 4.2/70.7m | | | | 3.9 | | | | 3.6 | 72.0 | |
| 74.0 | | | | | | | | 3.7/73.6m | | | | 3.4 | 74.0 | |
| 76.0 | | | | | | | | | | | | 3.2 | 76.0 | |
| 78.0 | | | | | | | | | | | | 3.2/76.6m | 78.0 | |
| 接地 | 前方自立時 | 70.3 t/m ² | | | | 70.9 t/m ² | | | | 72.7 t/m ² | | | | 前方自立時 |
| 接地 | 作業時最大 | 65.0 t/m ² | | | | 65.3 t/m ² | | | | 66.0 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

(単位：t)

| タワー長さm | | 64.1 | | | | | | | | | | | | タワー長さm |
|---------|-------|-----------------------|-----------|-----------|-----------|-----------------------|------------|-----------|------------|-----------------------|-----------|-----|------|--------|
| ジブ長さm | | 45.7 | | | | 48.8 | | | | 51.8 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 90° | 80° | 70° | 90° | 70° | タワー角度 |
| 作業半径(m) | 12.0 | 22.0/13.3m | | | | | | | | | | | | 12.0 |
| | 14.0 | 21.6 | | | | 20.5 | | | 18.3/14.6m | | | | | 14.0 |
| | 16.0 | 20.5 | | | | 19.5 | | | 17.9 | | | | | 16.0 |
| | 18.0 | 19.6 | | | | 18.6 | | | 17.2 | | | | | 18.0 |
| | 20.0 | 18.9 | | | | 17.8 | | | 16.6 | | | | | 20.0 |
| | 22.0 | 18.2 | | | | 17.1 | | | 16.0 | | | | | 22.0 |
| | 24.0 | 17.5 | | | | 16.5 | | | 15.4 | | | | | 24.0 |
| | 26.0 | 17.0 | | | | 16.0 | | | 14.8 | | | | | 26.0 |
| | 28.0 | 16.5 | | | | 15.5 | | | 14.2 | | | | | 28.0 |
| | 30.0 | 15.3 | | | | 15.0 | | | 13.4 | | | | | 30.0 |
| | 32.0 | 14.2 | 13.6 | | | 14.0 | 12.4/33.2m | | | 12.7 | | | | 32.0 |
| | 34.0 | 13.3 | 13.2 | | | 13.0 | 12.3 | | | 12.0 | | | | 34.0 |
| | 36.0 | 12.5 | 12.9 | | | 12.2 | 11.9 | | | 11.3 | 10.9 | | | 36.0 |
| | 38.0 | 11.8 | 12.4 | | | 11.5 | 11.6 | | | 10.7 | 10.5 | | | 38.0 |
| | 40.0 | 11.1 | 11.7 | | | 10.8 | 11.3 | | | 10.0 | 10.3 | | | 40.0 |
| | 42.0 | 9.9 | 11.0 | | | 10.3 | 10.8 | | | 9.5 | 10.0 | | | 42.0 |
| | 44.0 | 8.5 | 10.4 | | | 9.4 | 10.2 | | | 8.9 | 9.8 | | | 44.0 |
| | 46.0 | 7.0 | 9.8 | | | 8.1 | 9.7 | | | 8.3 | 9.4 | | | 46.0 |
| | 48.0 | 5.2/47.8m | 9.4 | 8.3/49.8m | | 6.7 | 9.2 | | | 7.6 | 8.9 | | | 48.0 |
| | 50.0 | | 8.8 | 8.2 | | 5.2 | 8.7 | 7.6/51.4m | | 6.4 | 8.4 | | | 50.0 |
| | 52.0 | | 8.3 | 7.9 | | 4.7/50.7m | 8.2 | 7.5 | 5.2 | 8.0 | 6.7/53.0m | | | 52.0 |
| | 54.0 | | 7.7 | 7.5 | | | 7.7 | 7.2 | 4.0/53.7m | 7.5 | 6.6 | | | 54.0 |
| | 56.0 | | 7.2 | 7.2 | | | 7.2 | 6.9 | | 7.1 | 6.5 | | | 56.0 |
| | 58.0 | | 6.5 | 6.9 | | | 6.7 | 6.6 | | 6.6 | 6.2 | | | 58.0 |
| | 60.0 | | 6.2/58.9m | 6.6 | | | 6.2 | 6.3 | | 6.2 | 6.0 | | | 60.0 |
| | 62.0 | | | 6.3 | | | 5.6/61.8m | 6.0 | | 5.7 | 5.7 | | | 62.0 |
| | 64.0 | | | 5.9 | | | | 5.7 | | 5.2 | 5.5 | | | 64.0 |
| | 66.0 | | | 5.6 | 4.0/66.1m | | | 5.5 | | 5.0/64.8m | 5.2 | | | 66.0 |
| 68.0 | | | 5.2 | 3.8 | | | 5.2 | | | 4.9 | | | 68.0 | |
| 70.0 | | | 4.9/69.6m | 3.6 | | | 4.9 | | | 4.8 | | | 70.0 | |
| 72.0 | | | | 3.4 | | | 4.6 | | | 4.5 | | | 72.0 | |
| 74.0 | | | | 3.2 | | | 4.5/72.5m | | | 4.1 | | | 74.0 | |
| 76.0 | | | | 3.0 | | | | | | 3.8/75.5m | | | 76.0 | |
| 78.0 | | | | 2.9 | | | | | | | | | 78.0 | |
| 接地 | 前方自立時 | 72.7 t/m ² | | | | 72.0 t/m ² | | | | 72.0 t/m ² | | | | 前方自立時 |
| 接地 | 作業時最大 | 66.1 t/m ² | | | | 53.7 t/m ² | | | | 54.7 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

▶ タワー長さ 48.8m (200t 級能力)

(94.5t カウンタウエイト / カーボディウエイトあり) (オプション)



(単位：t)

| タワー長さm | | 48.8 | | | | | | | | | | | | タワー長さm |
|----------|-------|-----------------------|------------|------------|-----------|-----------------------|------------|------------|-----|-----------------------|------------|------------|-----------|--------|
| ジブ長さm | | 27.4 | | | | 30.5 | | | | 33.5 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径 (m) | 9.0 | 27.0/9.5m | | | | | | | | | | | | 9.0 |
| | 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | 10.0 |
| | 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 12.0 |
| | 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 14.0 |
| | 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 16.0 |
| | 18.0 | 27.0 | | | | 26.4 | | | | 26.2 | | | | 18.0 |
| | 20.0 | 25.3 | | | | 24.6 | | | | 24.2 | | | | 20.0 |
| | 22.0 | 23.3 | 26.3/22.5m | | | 22.9 | 24.5/23.7m | | | 22.5 | | | | 22.0 |
| | 24.0 | 21.3 | 24.6 | | | 21.3 | 24.1 | | | 21.1 | 22.8/24.8m | | | 24.0 |
| | 26.0 | 19.1 | 22.6 | | | 19.6 | 22.2 | | | 19.5 | 21.7 | | | 26.0 |
| | 28.0 | 16.2 | 20.9 | | | 17.8 | 20.5 | | | 17.8 | 20.1 | | | 28.0 |
| | 30.0 | 11.4 | 19.3 | | | 15.6 | 19.1 | | | 16.3 | 18.7 | | | 30.0 |
| | 32.0 | 11.0/30.1m | 17.9 | | | 12.0 | 17.7 | | | 14.7 | 17.4 | | | 32.0 |
| | 34.0 | | 16.4 | 14.1/34.9m | | 9.7/33.1m | 16.4 | | | 11.9 | 16.2 | | | 34.0 |
| | 36.0 | | 14.9 | 13.5 | | | 15.2 | 13.2/36.5m | | 8.5 | 15.1 | | | 36.0 |
| | 38.0 | | 13.3 | 12.7 | | | 14.1 | 12.5 | | | 14.1 | 12.4/38.1m | | 38.0 |
| | 40.0 | | 12.7/38.6m | 11.8 | | | 12.7 | 11.7 | | | 13.1 | 11.6 | | 40.0 |
| | 42.0 | | | 11.2 | | | 11.4/41.5m | 11.1 | | | 12.0 | 10.9 | | 42.0 |
| | 44.0 | | | 10.3 | | | | 10.2 | | | 10.7 | 10.1 | | 44.0 |
| | 46.0 | | | 9.7 | 8.5/46.2m | | | 9.6 | | | 10.3/44.5m | 9.6 | | 46.0 |
| | 48.0 | | | 9.5/46.7m | 8.4 | | | 9.0 | | | | 9.0 | | 48.0 |
| | 50.0 | | | | 8.0 | | | 8.6/49.6m | 7.9 | | | 8.4 | 7.5/50.3m | 50.0 |
| | 52.0 | | | | 7.5 | | | | 7.4 | | | 7.9 | 7.3 | 52.0 |
| | 54.0 | | | | 7.1 | | | | 7.0 | | | 7.7/52.6m | 6.9 | 54.0 |
| 56.0 | | | | 7.0/54.2m | | | | 6.6 | | | | 6.5 | 56.0 | |
| 58.0 | | | | | | | | 6.5/57.2m | | | | 6.2 | 58.0 | |
| 60.0 | | | | | | | | | | | | 5.9 | 60.0 | |
| 62.0 | | | | | | | | | | | | 5.8/60.1m | 62.0 | |
| 接地圧 | 前方自立時 | 31.1 t/m ² | | | | 31.5 t/m ² | | | | 31.7 t/m ² | | | | 前方自立時 |
| 接地圧 | 作業時最大 | 48.7 t/m ² | | | | 50.1 t/m ² | | | | 51.2 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

(単位：t)

| タワー長さm | | 48.8 | | | | | | | | | | | | タワー長さm |
|----------|-------|-----------------------|-----------|------------|-----------|-----------------------|------------|------------|-----------|-----------------------|------------|------------|-----------|--------|
| ジブ長さm | | 36.6 | | | | 39.6 | | | | 42.7 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径 (m) | 10.0 | 27.0/11.4m | | | | | | | | | | | | 10.0 |
| | 12.0 | 27.0 | | | | 27.0/12.1m | | | | 26.4/12.7m | | | | 12.0 |
| | 14.0 | 27.0 | | | | 27.0 | | | | 26.4 | | | | 14.0 |
| | 16.0 | 26.4 | | | | 26.4 | | | | 26.1 | | | | 16.0 |
| | 18.0 | 26.0 | | | | 25.8 | | | | 25.0 | | | | 18.0 |
| | 20.0 | 24.0 | | | | 23.9 | | | | 23.7 | | | | 20.0 |
| | 22.0 | 22.3 | | | | 22.1 | | | | 21.9 | | | | 22.0 |
| | 24.0 | 20.7 | | | | 20.5 | | | | 20.3 | | | | 24.0 |
| | 26.0 | 19.1 | 21.3 | | | 18.8 | 19.9/27.1m | | | 18.5 | | | | 26.0 |
| | 28.0 | 17.8 | 19.7 | | | 17.2 | 19.4 | | | 16.9 | 18.7/28.3m | | | 28.0 |
| | 30.0 | 16.5 | 18.4 | | | 16.1 | 18.0 | | | 15.6 | 17.6 | | | 30.0 |
| | 32.0 | 15.2 | 17.2 | | | 15.0 | 16.8 | | | 14.6 | 16.4 | | | 32.0 |
| | 34.0 | 13.9 | 16.0 | | | 14.0 | 15.8 | | | 13.6 | 15.4 | | | 34.0 |
| | 36.0 | 11.5 | 15.0 | | | 13.1 | 14.8 | | | 12.8 | 14.5 | | | 36.0 |
| | 38.0 | 9.0 | 14.0 | 11.6/39.7m | | 11.1 | 13.8 | | | 12.1 | 13.7 | | | 38.0 |
| | 40.0 | 7.6/39.0m | 13.1 | 11.5 | | 9.0 | 12.9 | 10.8/41.4m | | 10.5 | 12.8 | | | 40.0 |
| | 42.0 | | 12.3 | 10.9 | | 6.7/41.9m | 12.1 | 10.6 | | 8.8 | 12.0 | 10.0/43.0m | | 42.0 |
| | 44.0 | | 11.3 | 10.0 | | | 11.4 | 9.9 | | 6.8 | 11.2 | 9.7 | | 44.0 |
| | 46.0 | | 10.3 | 9.4 | | | 10.6 | 9.4 | | 5.8/44.8m | 10.6 | 9.2 | | 46.0 |
| | 48.0 | | 9.5/47.4m | 8.9 | | | 9.8 | 8.7 | | | 9.9 | 8.7 | | 48.0 |
| | 50.0 | | | 8.4 | | | 8.9 | 8.3 | | | 9.3 | 8.1 | | 50.0 |
| | 52.0 | | | 7.9 | 7.0/52.4m | | 8.7/50.3m | 7.7 | | | 8.5 | 7.6 | | 52.0 |
| | 54.0 | | | 7.4 | 6.8 | | | 7.3 | 6.7/54.4m | | 7.7/53.3m | 7.1 | | 54.0 |
| | 56.0 | | | 7.1/55.5m | 6.4 | | | 6.9 | 6.3 | | | 6.8 | 6.1/56.4m | 56.0 |
| 58.0 | | | | 6.1 | | | 6.5 | 5.9 | | | 6.4 | 5.8 | 58.0 | |
| 60.0 | | | | 5.8 | | | 5.6 | 5.0 | | | 6.1 | 5.5 | 60.0 | |
| 62.0 | | | | 5.5 | | | 5.4 | | | | 5.9/61.4m | 5.3 | 62.0 | |
| 64.0 | | | | 5.4/63.1m | | | 5.2 | | | | | 5.1 | 64.0 | |
| 66.0 | | | | | | | 5.0 | | | | | 4.9 | 66.0 | |
| 68.0 | | | | | | | | | | | | 4.6 | 68.0 | |
| 70.0 | | | | | | | | | | | | 4.5/69.0m | 70.0 | |
| 接地圧 | 前方自立時 | 31.6 t/m ² | | | | 31.1 t/m ² | | | | 30.1 t/m ² | | | | 前方自立時 |
| 接地圧 | 作業時最大 | 52.3 t/m ² | | | | 53.8 t/m ² | | | | 55.2 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

▶ タワー長さ 51.9m (200t 級能力)



(94.5t カウンタウエイト / カーボディウエイトあり) (オプション)

(単位：t)

| タワー長さm | 51.9 | | | | | | | | | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|-----------|------|-----------------------|------------|-----------|------|-----------------------|------------|------------|------------|-------|
| ジブ長さm | 27.4 | | | | 30.5 | | | | 33.5 | | | | 36.6 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | | | | | 9.0 | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | | 27.0/10.8m | | | | | 27.0/11.4m | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | | 27.0 | | | | | 27.0 | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | | 27.0 | | | | | 27.0 | | 14.0 | |
| 16.0 | 27.0 | | | | 27.0 | | | | | 27.0 | | | | | 26.4 | | 16.0 | |
| 18.0 | 27.0 | | | | 26.4 | | | | | 26.1 | | | | | 26.0 | | 18.0 | |
| 20.0 | 25.3 | | | | 24.6 | | | | | 24.2 | | | | | 24.0 | | 20.0 | |
| 22.0 | 23.3 | 25.5/23.1m | | | 22.9 | | | | | 22.5 | | | | | 22.2 | | 22.0 | |
| 24.0 | 21.3 | 24.5 | | | 21.3 | 23.7/24.2m | | | | 21.1 | 22.1/25.4m | | | | 20.7 | | 24.0 | |
| 26.0 | 19.1 | 22.5 | | | 19.6 | 22.0 | | | | 19.5 | 21.5 | | | | 19.1 | 20.6/26.5m | 26.0 | |
| 28.0 | 16.3 | 20.7 | | | 17.8 | 20.3 | | | | 17.8 | 19.9 | | | | 17.8 | 19.6 | 28.0 | |
| 30.0 | 11.4 | 19.1 | | | 15.6 | 18.9 | | | | 16.2 | 18.5 | | | | 16.5 | 18.2 | 30.0 | |
| 32.0 | 11.0/30.1m | 17.6 | | | 12.0 | 17.5 | | | | 14.7 | 17.3 | | | | 15.2 | 17.0 | 32.0 | |
| 34.0 | | 16.3 | 13.4/35.9m | | 9.8/33.1m | 16.1 | | | | 11.9 | 16.0 | | | | 13.9 | 15.9 | 34.0 | |
| 36.0 | | 15.0 | 13.3 | | | 15.0 | 11.7/37.6m | | | 8.6 | 14.9 | | | | 11.6 | 14.8 | 36.0 | |
| 38.0 | | 13.5 | 12.4 | | | 14.0 | 11.4 | | | 13.9 | 10.8/39.2m | | | | 9.1 | 13.8 | 38.0 | |
| 40.0 | | 12.4/39.1m | 11.5 | | | 12.8 | 10.6 | | | 13.0 | 10.5 | | | | 7.6/39.0m | 12.9 | 10.0/40.8m | 40.0 |
| 42.0 | | | 10.9 | | | 11.2 | 9.9 | | | 12.0 | 9.8 | | | | 12.1 | 9.6 | 42.0 | |
| 44.0 | | | 10.1 | | | | 9.2 | | | 10.8 | 9.1 | | | | 11.3 | 9.1 | 44.0 | |
| 46.0 | | | 9.5 | 8.3/47.8m | | | 8.7 | | | 10.1/45.0m | 8.6 | | | | 10.3 | 8.5 | 46.0 | |
| 48.0 | | | 9.1/47.7m | 8.2 | | | 8.2 | | | | 8.1 | | | | 9.3/47.9m | 8.0 | 48.0 | |
| 50.0 | | | | 7.9 | | | 7.8 | 7.7 | | | 7.7 | 7.3/51.8m | | | | 7.6 | 50.0 | |
| 52.0 | | | | 7.5 | | | 7.6/50.7m | 7.4 | | | 7.2 | 7.2 | | | 7.2 | 6.7/53.9m | 52.0 | |
| 54.0 | | | | 7.1 | | | | 7.0 | | | 7.0/53.6m | 6.9 | | | 6.8 | 6.7 | 54.0 | |
| 56.0 | | | | 6.8/55.8m | | | | 6.6 | | | | 6.5 | | | 6.4 | 6.4 | 56.0 | |
| 58.0 | | | | | | | | 6.3 | | | | 6.2 | | | 6.4/56.6m | 6.1 | 58.0 | |
| 60.0 | | | | | | | | 6.2/58.7m | | | | 5.9 | | | | 5.8 | 60.0 | |
| 62.0 | | | | | | | | | | | | 5.7/61.7m | | | | 5.5 | 62.0 | |
| 64.0 | | | | | | | | | | | | | | | | 5.3 | 64.0 | |
| 66.0 | | | | | | | | | | | | | | | | 5.2/64.6m | 66.0 | |
| 接地 | 前方自立時 | 35.4 t/m ² | | | | 35.9 t/m ² | | | | 36.4 t/m ² | | | | 36.4 t/m ² | | | | 前方自立時 |
| 作業時最大 | | 52.2 t/m ² | | | | 53.6 t/m ² | | | | 55.7 t/m ² | | | | 56.7 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
※ジブ長さ 27.4m での、ボールフックの使用はできません。

(単位：t)

| タワー長さm | 51.9 | | | | | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|-----------|-----------|------------|-----------------------|-----------|-----------|------------|-----------------------|-----------|-----------|--------|-------|
| ジブ長さm | 39.6 | | | | 42.7 | | | | 45.7 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 12.0 | 27.0/12.1m | | | | 26.4/12.7m | | | | 24.8/13.3m | | | | 12.0 | |
| 14.0 | 27.0 | | | | 26.4 | | | | 24.5 | | | | 14.0 | |
| 16.0 | 26.4 | | | | 26.1 | | | | 23.6 | | | | 16.0 | |
| 18.0 | 25.8 | | | | 25.0 | | | | 22.6 | | | | 18.0 | |
| 20.0 | 23.8 | | | | 23.6 | | | | 21.6 | | | | 20.0 | |
| 22.0 | 22.1 | | | | 21.9 | | | | 20.6 | | | | 22.0 | |
| 24.0 | 20.5 | | | | 20.3 | | | | 19.6 | | | | 24.0 | |
| 26.0 | 18.8 | 19.4/27.6m | | | 18.5 | | | | 18.3 | | | | 26.0 | |
| 28.0 | 17.2 | 19.2 | | | 16.9 | 18.1/28.8m | | | 16.7 | 17.0/29.9m | | | 28.0 | |
| 30.0 | 16.1 | 17.8 | | | 15.6 | 17.4 | | | 15.3 | 17.0 | | | 30.0 | |
| 32.0 | 15.0 | 16.6 | | | 14.6 | 16.2 | | | 14.3 | 15.8 | | | 32.0 | |
| 34.0 | 13.9 | 15.6 | | | 13.6 | 15.2 | | | 13.4 | 14.8 | | | 34.0 | |
| 36.0 | 13.0 | 14.6 | | | 12.8 | 14.3 | | | 12.5 | 14.0 | | | 36.0 | |
| 38.0 | 11.1 | 13.6 | | | 12.1 | 13.4 | | | 11.8 | 13.2 | | | 38.0 | |
| 40.0 | 9.1 | 12.7 | | | 10.6 | 12.6 | | | 11.2 | 12.4 | | | 40.0 | |
| 42.0 | 6.7/41.9m | 11.9 | 9.3/42.4m | | 8.8 | 11.8 | | | 10.0 | 11.6 | | | 42.0 | |
| 44.0 | | 11.2 | 8.9 | | 6.8 | 11.0 | 8.6 | | 8.4 | 10.9 | 8.0/45.6m | | 44.0 | |
| 46.0 | | 10.5 | 8.3 | | 5.9/44.8m | 10.4 | 8.1 | | 6.8 | 10.3 | 7.9 | | 46.0 | |
| 48.0 | | 9.8 | 7.8 | | | 9.8 | 7.6 | | 5.2/47.8m | 9.7 | 7.5 | | 48.0 | |
| 50.0 | | 8.9 | 7.4 | | | 9.2 | 7.2 | | | 9.2 | 7.0 | | 50.0 | |
| 52.0 | | 8.4/50.9m | 7.0 | | | 8.5 | 6.8 | | | 8.7 | 6.6 | | 52.0 | |
| 54.0 | | | 6.6 | 6.1/55.9m | | 7.6/53.8m | 6.4 | | | 8.0 | 6.2 | | 54.0 | |
| 56.0 | | | 6.3 | 6.1 | | | 6.1 | | | 7.3 | 5.9 | | 56.0 | |
| 58.0 | | | 5.9 | 5.9 | | | 5.8 | 5.7 | | 6.9/56.8m | 5.6 | | 58.0 | |
| 60.0 | | | 5.7/59.5m | 5.6 | | | 5.5 | 5.4 | | | 5.4 | 5.1 | 60.0 | |
| 62.0 | | | | 5.3 | | | 5.3 | 5.1 | | | 5.1 | 4.9 | 62.0 | |
| 64.0 | | | | 5.1 | | | 5.3/62.5m | 4.9 | | | 4.9 | 4.7 | 64.0 | |
| 66.0 | | | | 4.9 | | | | 4.7 | | | 4.7/65.4m | 4.5 | 66.0 | |
| 68.0 | | | | 4.7/67.5m | | | | 4.5 | | | | 4.3 | 68.0 | |
| 70.0 | | | | | | | | 4.2 | | | | 4.1 | 70.0 | |
| 72.0 | | | | | | | | 4.2/70.5m | | | | 3.8 | 72.0 | |
| 74.0 | | | | | | | | | | | | 3.7/73.4m | 74.0 | |
| 接地 | 前方自立時 | 36.1 t/m ² | | | | 35.8 t/m ² | | | | 34.1 t/m ² | | | | 前方自立時 |
| 作業時最大 | | 57.2 t/m ² | | | | 58.7 t/m ² | | | | 58.8 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

▶ タワー長さ 54.9m (200t 級能力)

(94.5t カウンタウエイト / カーボディウエイトあり) (オプション)



(単位: t)

| タワー長さm | 54.9 | | | | | | | | | | | | | | | | タワー長さm | |
|-------------|----------------|--|------------|-----------|------------|--|------------|-----------|------------|--|------------|-----------|------|--|-----|-----------|--------|----------------|
| ジブ長さm | 27.4 | | | | 30.5 | | | | 33.5 | | | | 36.6 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | | | | | 9.0 | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | | | 14.0 | |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | | | 16.0 | |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.1 | | | | | | | | 18.0 | |
| 20.0 | 25.2 | | | | 24.6 | | | | 24.2 | | | | | | | | 20.0 | |
| 22.0 | 23.3 | 24.7/23.6m | | | 22.9 | | | | 22.5 | | | | | | | | 22.0 | |
| 24.0 | 21.3 | 24.3 | | | 21.3 | 23.0/24.7m | | | 21.1 | 21.4/25.9m | | | | | | | 24.0 | |
| 26.0 | 19.1 | 22.3 | | | 19.6 | 21.8 | | | 19.5 | 21.3 | | | | | | | 26.0 | |
| 28.0 | 16.3 | 20.6 | | | 17.8 | 20.1 | | | 17.8 | 19.7 | | | | | | | 28.0 | |
| 30.0 | 11.5 | 18.9 | | | 15.6 | 18.7 | | | 16.2 | 18.4 | | | | | | | 30.0 | |
| 32.0 | 11.1/30.1m | 17.5 | | | 12.1 | 17.2 | | | 14.7 | 17.0 | | | | | | | 32.0 | |
| 34.0 | | 16.1 | | | 9.8/33.1m | 15.9 | | | 12.0 | 15.8 | | | | | | | 34.0 | |
| 36.0 | | 14.9 | 11.9/37.0m | | | 14.8 | | | 8.6 | 14.7 | | | | | | | 36.0 | |
| 38.0 | | 13.6 | 11.3 | | | 13.8 | 10.1/38.6m | | | 13.7 | | | | | | | 38.0 | |
| 40.0 | | 12.1/39.6m | 10.7 | | | 12.8 | 9.7 | | | 12.8 | 10.4/40.2m | | | | | | 40.0 | |
| 42.0 | | | 10.0 | | | 11.4 | 9.0 | | | 12.0 | 9.8 | | | | | | 42.0 | |
| 44.0 | | | 9.3 | | | 10.9/42.6m | 8.4 | | | 10.9 | 9.1 | | | | | | 44.0 | |
| 46.0 | | | 8.8 | | | | 7.9 | | | 9.8/45.5m | 8.6 | | | | | | 46.0 | |
| 48.0 | | | 8.4 | | | | 7.4 | | | 8.1 | | | | | | | 48.0 | |
| 50.0 | | | 8.2/48.8m | 7.8 | | | 7.0 | 3.9/51.3m | | 7.7 | | | | | | | 50.0 | |
| 52.0 | | | | 7.5 | | | 6.6/51.7m | 3.8 | | | 7.3 | 6.9/53.4m | | | | | 52.0 | |
| 54.0 | | | | 7.1 | | | | 3.6 | | | 6.9 | 6.8 | | | | | 54.0 | |
| 56.0 | | | | 6.7 | | | | 3.3 | | | 6.8/54.7m | 6.5 | | | | | 56.0 | |
| 58.0 | | | | 6.5/57.3m | | | | 3.1 | | | | 6.1 | | | | | 58.0 | |
| 60.0 | | | | | | | | 2.9 | | | | 5.8 | | | | | 60.0 | |
| 62.0 | | | | | | | | 2.9/60.2m | | | | 5.5 | | | | | 62.0 | |
| 64.0 | | | | | | | | | | | | 5.4/63.2m | | | | | 64.0 | |
| 66.0 | | | | | | | | | | | | | | | | | 66.0 | |
| 68.0 | | | | | | | | | | | | | | | | 5.0/66.1m | 68.0 | |
| 接 地 圧 | 前方自立時 作業時最大 | 41.4 t/m ² 56.4 t/m ² | | | | 42.3 t/m ² 39.1 t/m ² | | | | 43.1 t/m ² 60.0 t/m ² | | | | 43.1 t/m ² 62.0 t/m ² | | | | 前方自立時 作業時最大 |


※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

※ジブ長さ 27.4m での、ボールフックの使用はできません。

(単位: t)

| タワー長さm | 54.9 | | | | | | | | | | | | | | | | タワー長さm | |
|-------------|----------------|--|-----------|-----------|------------|--|-----------|-----------|------------|--|-----------|-----------|------|--|-----|-----------|--------|----------------|
| ジブ長さm | 39.6 | | | | 42.7 | | | | 45.7 | | | | 48.8 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 12.0 | 27.0/12.1m | | | | 26.4/12.7m | | | | 24.7/13.3m | | | | | | | | 12.0 | |
| 14.0 | 27.0 | | | | 26.4 | | | | 24.5 | | | | | | | | 14.0 | |
| 16.0 | 26.4 | | | | 26.0 | | | | 23.5 | | | | | | | | 16.0 | |
| 18.0 | 25.8 | | | | 24.9 | | | | 22.5 | | | | | | | | 18.0 | |
| 20.0 | 23.8 | | | | 23.6 | | | | 21.5 | | | | | | | | 20.0 | |
| 22.0 | 22.0 | | | | 21.8 | | | | 20.6 | | | | | | | | 22.0 | |
| 24.0 | 20.5 | | | | 20.3 | | | | 19.6 | | | | | | | | 24.0 | |
| 26.0 | 18.7 | | | | 18.5 | | | | 18.3 | | | | | | | | 26.0 | |
| 28.0 | 17.2 | 18.8/28.2m | | | 16.9 | 17.6/29.3m | | | 16.7 | | | | | | | | 28.0 | |
| 30.0 | 16.1 | 17.6 | | | 15.6 | 17.1 | | | 15.3 | 16.5/30.5m | | | | | | | 30.0 | |
| 32.0 | 15.0 | 16.4 | | | 14.6 | 16.0 | | | 14.3 | 15.6 | | | | | | | 32.0 | |
| 34.0 | 13.9 | 15.4 | | | 13.6 | 15.0 | | | 13.3 | 14.7 | | | | | | | 34.0 | |
| 36.0 | 12.9 | 14.3 | | | 12.8 | 14.2 | | | 12.5 | 13.8 | | | | | | | 36.0 | |
| 38.0 | 11.1 | 13.4 | | | 12.0 | 13.2 | | | 11.8 | 13.0 | | | | | | | 38.0 | |
| 40.0 | 9.1 | 12.6 | | | 10.6 | 12.3 | | | 11.2 | 12.2 | | | | | | | 40.0 | |
| 42.0 | 6.8/41.9m | 11.8 | 8.7/43.4m | | 8.8 | 11.6 | | | 10.0 | 11.4 | | | | | | | 42.0 | |
| 44.0 | | 11.0 | 8.6 | | 6.9 | 10.9 | 8.1/45.1m | | 8.5 | 10.7 | | | | | | | 44.0 | |
| 46.0 | | 10.3 | 8.3 | | 5.9/44.8m | 10.2 | 7.9 | | 7.1 | 10.1 | 7.6/46.7m | | | | | | 46.0 | |
| 48.0 | | 9.8 | 7.8 | | | 9.6 | 7.6 | | 5.2/47.8m | 9.6 | 7.3 | | | | | | 48.0 | |
| 50.0 | | 9.0 | 7.4 | | | 9.1 | 7.2 | | | 9.0 | 7.0 | | | | | | 50.0 | |
| 52.0 | | 8.2/51.4m | 7.0 | | | 8.5 | 6.8 | | | 8.5 | 6.6 | | | | | | 52.0 | |
| 54.0 | | | 6.6 | | | 7.6 | 6.4 | | | 8.0 | 6.2 | | | | | | 54.0 | |
| 56.0 | | | 6.3 | 5.9/57.5m | | 7.4/54.4m | 6.1 | | | 7.3 | 5.9 | | | | | | 56.0 | |
| 58.0 | | | 6.0 | 5.8 | | | 5.8 | 5.3/59.5m | | 6.8/57.3m | 5.6 | | | | | | 58.0 | |
| 60.0 | | | 5.7 | 5.6 | | | 5.5 | 5.2 | | | 5.4 | 4.9/61.5m | | | | | 60.0 | |
| 62.0 | | | 5.7/60.6m | 5.3 | | | 5.3 | 5.1 | | | 5.1 | 4.8 | | | | | 62.0 | |
| 64.0 | | | | 5.1 | | | 5.1/63.5m | 4.9 | | | 4.9 | 4.7 | | | | | 64.0 | |
| 66.0 | | | | 4.9 | | | | 4.7 | | | 4.7 | 4.5 | | | | | 66.0 | |
| 68.0 | | | | 4.6 | | | | 4.5 | | | 4.7/66.4m | 4.3 | | | | | 68.0 | |
| 70.0 | | | | 4.5/69.1m | | | | 4.2 | | | | 4.1 | | | | | 70.0 | |
| 72.0 | | | | | | | | 4.0 | | | | 3.9 | | | | | 72.0 | |
| 74.0 | | | | | | | | | | | | 3.6 | | | | | 74.0 | |
| 76.0 | | | | | | | | | | | | 3.5/75.0m | | | | | 76.0 | |
| 78.0 | | | | | | | | | | | | | | | | 3.2/77.9m | 78.0 | |
| 接 地 圧 | 前方自立時 作業時最大 | 43.0 t/m ² 62.7 t/m ² | | | | 43.1 t/m ² 64.3 t/m ² | | | | 42.1 t/m ² 65.0 t/m ² | | | | 39.5 t/m ² 66.5 t/m ² | | | | 前方自立時 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

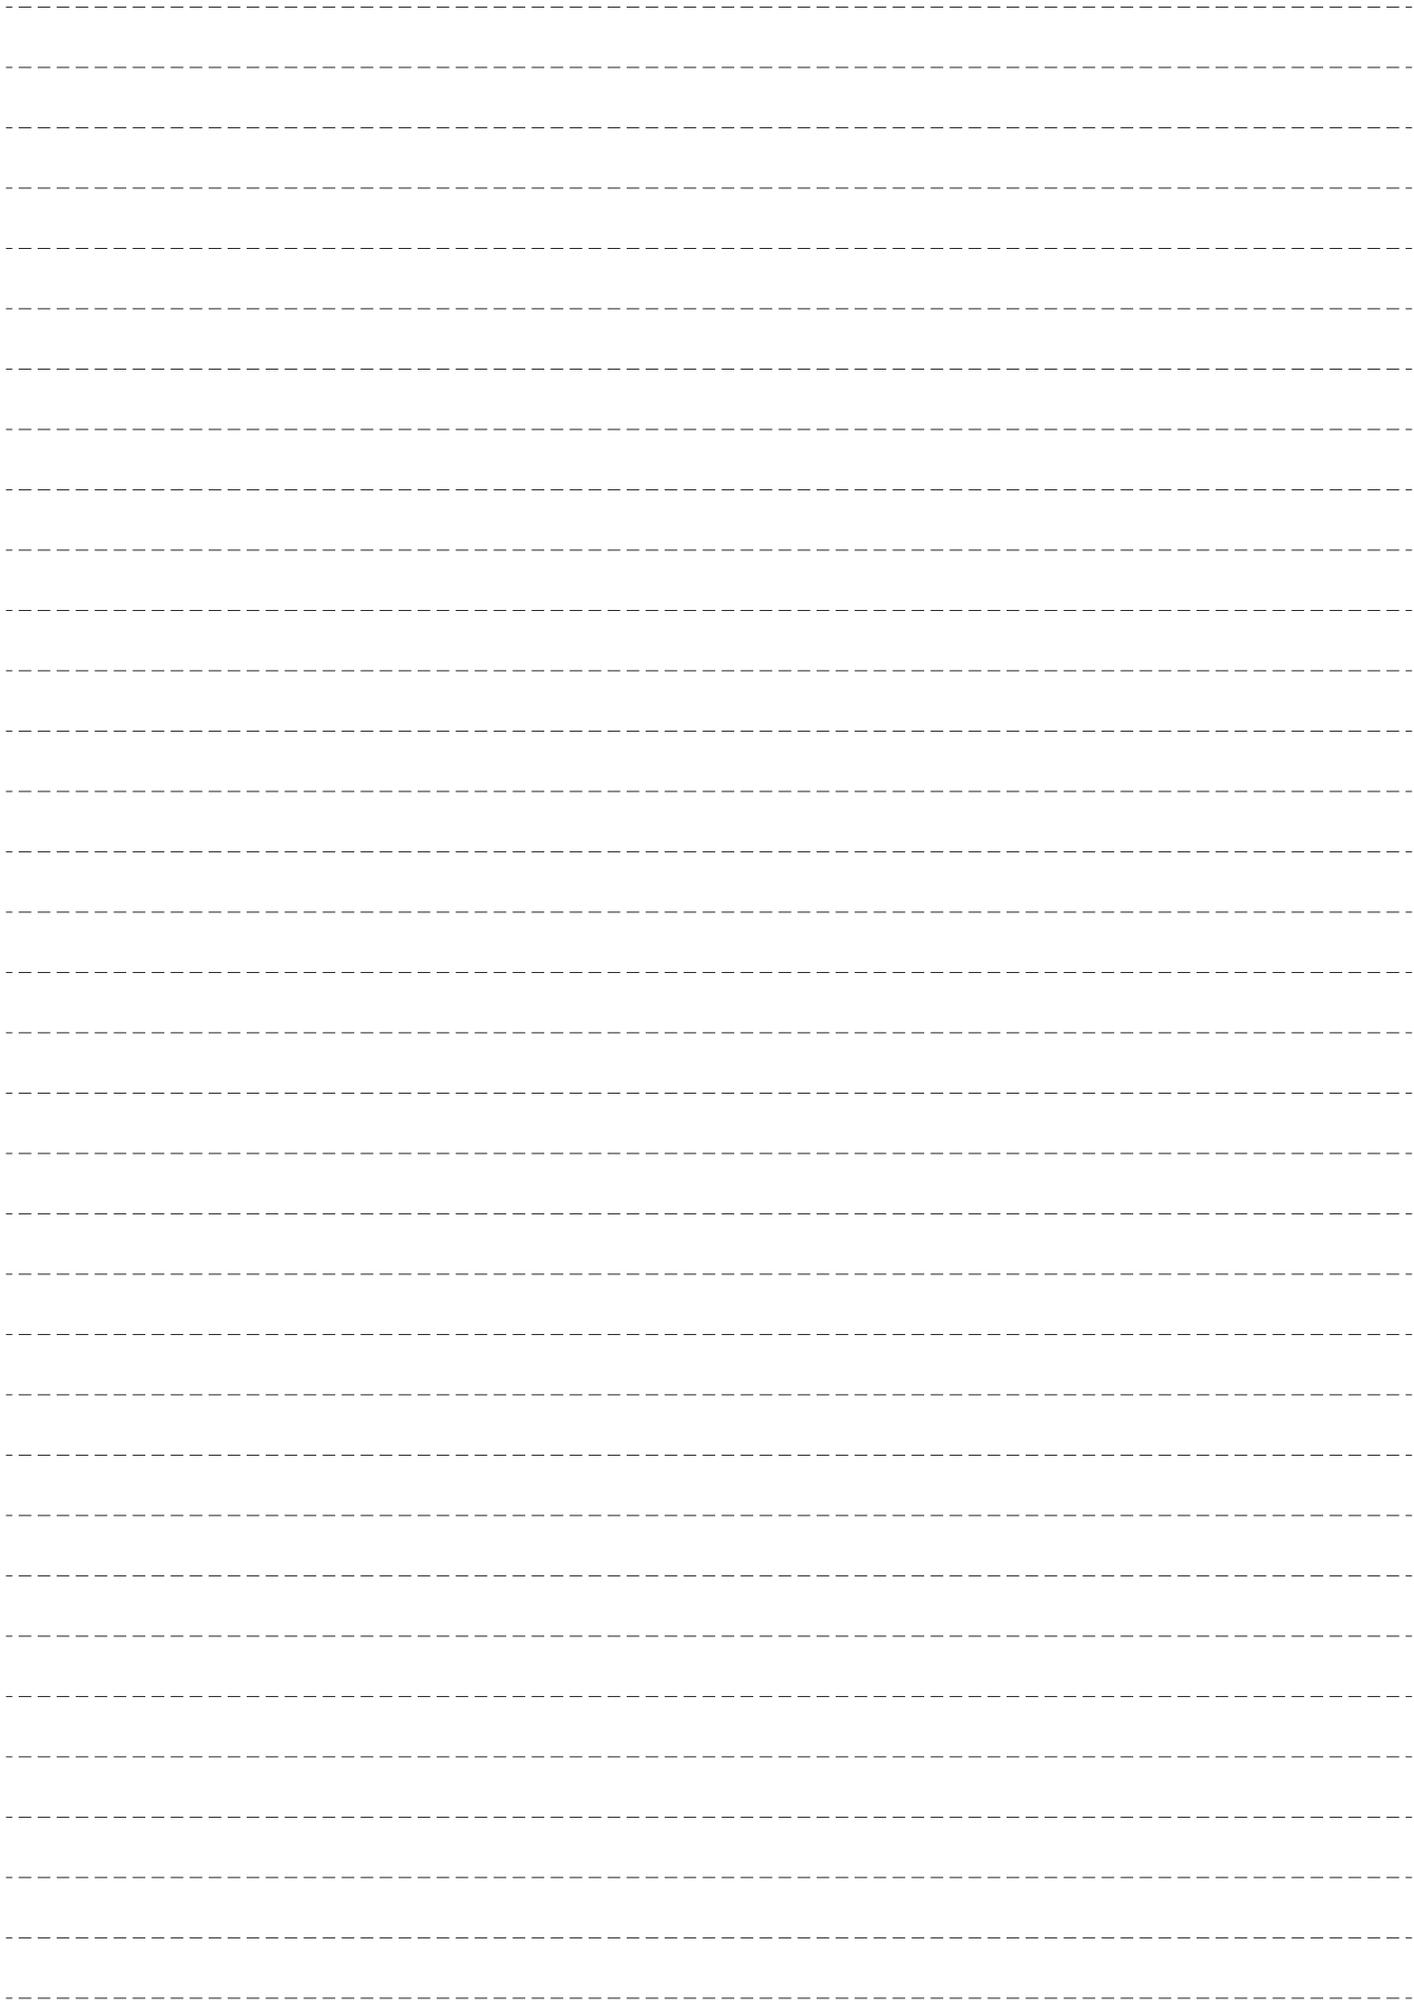

▶ タワー長さ 58.0m (200t 級能力)

(94.5t カウンタウエイト / カーボディウエイトあり) (オプション)



(単位：t)

| タワー長さm | | 58.0 | | | | | | | | | | | | タワー長さm |
|---------|-------|-----------------------|------------|-----------|-----------|-----------------------|------------|------------|-----------|-----------------------|------------|-----------|-----------|--------|
| ジブ長さm | | 27.4 | | | | 30.5 | | | | 33.5 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径(m) | 9.0 | 25.2/9.5m | | | | | | | | | | | | 9.0 |
| | 10.0 | 25.2 | | | | 25.2/10.2m | | | | 25.2/10.8m | | | | 10.0 |
| | 12.0 | 25.2 | | | | 25.2 | | | | 25.2 | | | | 12.0 |
| | 14.0 | 25.2 | | | | 25.2 | | | | 25.2 | | | | 14.0 |
| | 16.0 | 25.2 | | | | 25.2 | | | | 24.4 | | | | 16.0 |
| | 18.0 | 25.1 | | | | 24.4 | | | | 23.6 | | | | 18.0 |
| | 20.0 | 24.1 | | | | 23.6 | | | | 22.7 | | | | 20.0 |
| | 22.0 | 23.0 | | | | 22.7 | | | | 21.7 | | | | 22.0 |
| | 24.0 | 20.7 | 19.8/24.1m | | | 21.0 | 19.3/25.3m | | | 21.0 | | | | 24.0 |
| | 26.0 | 18.3 | 18.9 | | | 18.7 | 18.7 | | | 18.8 | 18.6/26.4m | | | 26.0 |
| | 28.0 | 16.3 | 17.1 | | | 16.8 | 17.0 | | | 16.8 | 16.9 | | | 28.0 |
| | 30.0 | 11.3 | 15.5 | | | 15.1 | 15.4 | | | 15.3 | 15.4 | | | 30.0 |
| | 32.0 | 9.9/30.1m | 14.3 | | | 12.0 | 14.2 | | | 14.0 | 14.2 | | | 32.0 |
| | 34.0 | | 13.1 | | | 8.8/33.1m | 13.0 | | | 10.8 | 13.0 | | | 34.0 |
| | 36.0 | | 12.1 | | | | 12.0 | | | 7.7 | 12.0 | | | 36.0 |
| | 38.0 | | 11.3 | 11.6 | | | 11.2 | 10.9/39.6m | | | 11.2 | | | 38.0 |
| | 40.0 | | 10.5 | 10.7 | | | 10.5 | 10.8 | | | 10.4 | 9.7/41.3m | | 40.0 |
| | 42.0 | | 10.6/40.2m | 10.0 | | | 9.7 | 9.9 | | | 9.8 | 9.5 | | 42.0 |
| | 44.0 | | | 9.3 | | | 9.4/43.1m | 9.2 | | | 9.1 | 9.1 | | 44.0 |
| | 46.0 | | | 8.8 | | | | 8.7 | | | 8.6 | 8.6 | | 46.0 |
| | 48.0 | | | 8.4 | | | | 8.2 | | | | 8.1 | | 48.0 |
| | 50.0 | | | 8.0/49.8m | 7.7/50.8m | | | 7.8 | | | | 7.7 | | 50.0 |
| | 52.0 | | | | 7.5 | | | 7.4 | 7.3/52.9m | | | 7.3 | | 52.0 |
| | 54.0 | | | | 7.1 | | | 7.3/52.8m | 7.0 | | | 6.9 | 6.7/54.9m | 54.0 |
| 56.0 | | | | 6.7 | | | | 6.6 | | | 6.6/55.7m | 6.5 | 56.0 | |
| 58.0 | | | | 6.3 | | | | 6.2 | | | | 6.1 | 58.0 | |
| 60.0 | | | | 6.2/58.8m | | | | 5.9 | | | | 5.8 | 60.0 | |
| 62.0 | | | | | | | | 5.7/61.8m | | | | 5.5 | 62.0 | |
| 64.0 | | | | | | | | | | | | 5.2 | 64.0 | |
| 66.0 | | | | | | | | | | | | 5.0/64.7m | 66.0 | |
| 接地圧 | 前方自立時 | 51.7 t/m ² | | | | 53.2 t/m ² | | | | 54.6 t/m ² | | | | 前方自立時 |
| 接地圧 | 作業時最大 | 62.4 t/m ² | | | | 65.0 t/m ² | | | | 66.2 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

(単位：t)

| タワー長さm | | 58.0 | | | | | | | | | | | | タワー長さm |
|---------|-------|-----------------------|------------|-----------|-----------|-----------------------|------------|-----------|-----|-----------------------|------------|-----------|------|--------|
| ジブ長さm | | 36.6 | | | | 39.6 | | | | 42.7 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径(m) | 10.0 | 24.2/11.5m | | | | | | | | | | | | 10.0 |
| | 12.0 | 24.2 | | | | 22.5/12.1m | | | | 20.6/12.7m | | | | 12.0 |
| | 14.0 | 23.9 | | | | 22.5 | | | | 20.6 | | | | 14.0 |
| | 16.0 | 23.2 | | | | 21.9 | | | | 20.2 | | | | 16.0 |
| | 18.0 | 22.5 | | | | 21.2 | | | | 19.7 | | | | 18.0 |
| | 20.0 | 21.6 | | | | 20.5 | | | | 19.0 | | | | 20.0 |
| | 22.0 | 20.8 | | | | 19.8 | | | | 18.4 | | | | 22.0 |
| | 24.0 | 19.9 | | | | 19.1 | | | | 17.7 | | | | 24.0 |
| | 26.0 | 18.8 | 16.3/27.6m | | | 18.3 | | | | 17.1 | | | | 26.0 |
| | 28.0 | 16.9 | 16.0 | | | 16.8 | 16.3/28.7m | | | 16.5 | 14.8/29.8m | | | 28.0 |
| | 30.0 | 15.3 | 15.2 | | | 15.2 | 15.0 | | | 15.2 | 14.7 | | | 30.0 |
| | 32.0 | 14.1 | 14.0 | | | 14.1 | 13.9 | | | 14.0 | 13.8 | | | 32.0 |
| | 34.0 | 12.9 | 12.8 | | | 12.9 | 12.7 | | | 12.8 | 12.6 | | | 34.0 |
| | 36.0 | 10.4 | 11.9 | | | 11.9 | 11.7 | | | 11.9 | 11.6 | | | 36.0 |
| | 38.0 | 8.1 | 11.1 | | | 10.7 | 11.0 | | | 10.9 | 10.8 | | | 38.0 |
| | 40.0 | 6.9/39.0m | 10.3 | | | 8.1 | 10.2 | | | 9.8 | 10.0 | | | 40.0 |
| | 42.0 | | 9.7 | 9.2/42.9m | | 6.1/41.9m | 9.6 | | | 7.9 | 9.4 | | | 42.0 |
| | 44.0 | | 9.1 | 8.9 | | | 9.0 | 8.8/44.5m | | 6.2 | 8.8 | | | 44.0 |
| | 46.0 | | 8.5 | 8.5 | | | 8.4 | 8.3 | | 5.3/44.8m | 8.2 | 8.1/46.1m | | 46.0 |
| | 48.0 | | 7.9 | 8.0 | | | 7.8 | 7.8 | | | 7.6 | 7.6 | | 48.0 |
| | 50.0 | | 7.8/49.0m | 7.6 | | | 7.3 | 7.4 | | | 7.2 | 7.2 | | 50.0 |
| | 52.0 | | | 7.2 | | | 6.9/51.9m | 7.0 | | | 6.7 | 6.8 | | 52.0 |
| | 54.0 | | | 6.7 | | | | 6.6 | | | 6.3 | 6.4 | | 54.0 |
| | 56.0 | | | 6.4 | 6.1/56.9m | | | 6.3 | | | 6.2/54.9m | 6.1 | | 56.0 |
| 58.0 | | | 6.1 | 5.9 | | | 5.9 | 5.5/59.0m | | | 5.8 | | 58.0 | |
| 60.0 | | | 6.0/58.7m | 5.6 | | | 5.7 | 5.4 | | | 5.5 | 5.0/61.0m | 60.0 | |
| 62.0 | | | | 5.3 | | | 5.5/61.6m | 5.1 | | | 5.3 | 4.8 | 62.0 | |
| 64.0 | | | | 5.0 | | | | 4.8 | | | 5.0 | 4.6 | 64.0 | |
| 66.0 | | | | 4.8 | | | | 4.6 | | | 4.9/64.5m | 4.4 | 66.0 | |
| 68.0 | | | | 4.6/67.7m | | | | 4.4 | | | | 4.2 | 68.0 | |
| 70.0 | | | | | | | | 4.2 | | | | 4.0 | 70.0 | |
| 72.0 | | | | | | | | 4.1/70.6m | | | | 3.8 | 72.0 | |
| 74.0 | | | | | | | | | | | | 3.6/73.5m | 74.0 | |
| 接地圧 | 前方自立時 | 54.9 t/m ² | | | | 55.0 t/m ² | | | | 55.6 t/m ² | | | | 前方自立時 |
| 接地圧 | 作業時最大 | 67.0 t/m ² | | | | 67.8 t/m ² | | | | 69.3 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

(単位：t)

| タワー長さm | 58.0 | | | | | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|-----------|-----------|-----------|-----------------------|-----------|-----------|------------|-----------------------|-----------|-----------|--------|-------|
| ジブ長さm | 45.7 | | | | 48.8 | | | | 51.8 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 12.0 | 19.3/13.3m | | | | 16.6 | | | | 14.8/14.6m | | | | 12.0 | |
| 14.0 | 19.0 | | | | 15.9 | | | | 14.3 | | | | 14.0 | |
| 16.0 | 18.0 | | | | 15.4 | | | | 14.0 | | | | 16.0 | |
| 18.0 | 17.4 | | | | 15.0 | | | | 13.6 | | | | 18.0 | |
| 20.0 | 16.9 | | | | 14.6 | | | | 13.1 | | | | 20.0 | |
| 22.0 | 16.4 | | | | 14.0 | | | | 12.7 | | | | 22.0 | |
| 24.0 | 15.9 | | | | 13.6 | | | | 12.2 | | | | 24.0 | |
| 26.0 | 15.3 | | | | 13.2 | | | | 11.8 | | | | 26.0 | |
| 28.0 | 14.8 | | | | 12.7 | | | | 11.4 | | | | 28.0 | |
| 30.0 | 14.2 | 14.1/31.0m | | | 12.2 | 13.5/32.1m | | | 11.0 | 11.8/33.3m | | | 30.0 | |
| 32.0 | 13.6 | 13.5 | | | 11.7 | 12.0 | | | 10.5 | 11.5 | | | 32.0 | |
| 34.0 | 12.6 | 12.5 | | | 11.0 | 11.3 | | | 9.9 | 10.6 | | | 34.0 | |
| 36.0 | 11.6 | 11.5 | | | 10.2 | 10.4 | | | 9.2 | 9.9 | | | 36.0 | |
| 38.0 | 10.7 | 10.7 | | | 9.5 | 9.6 | | | 8.6 | 9.2 | | | 38.0 | |
| 40.0 | 9.7 | 9.9 | | | 8.7 | 8.9 | | | 8.0 | 8.6 | | | 40.0 | |
| 42.0 | 8.9 | 9.2 | | | 8.0 | 8.3 | | | 7.5 | 8.0 | | | 42.0 | |
| 44.0 | 8.1 | 8.6 | | | 7.3 | 7.8 | | | 7.0 | 7.5 | | | 44.0 | |
| 46.0 | 6.3 | 8.0 | 7.5/47.7m | | 6.6 | 7.2 | 6.6/49.3m | | 6.4 | 7.0 | | | 46.0 | |
| 48.0 | 4.6/47.8m | 7.4 | 7.4 | | 4.6 | 6.8 | 6.5 | | 5.9 | 6.6 | 6.1/51.0m | | 48.0 | |
| 50.0 | | 7.0 | 7.0 | | 4.2/50.7m | 6.4 | 6.3 | | 4.5 | 6.2 | 5.9 | | 50.0 | |
| 52.0 | | 6.6 | 6.6 | | | 6.0 | 6.0 | | 3.6/53.7m | 5.8 | 5.7 | | 52.0 | |
| 54.0 | | 6.1 | 6.2 | | | 5.6 | 5.6 | | | 5.5 | 5.4 | | 54.0 | |
| 56.0 | | 5.8 | 5.9 | | | 5.3 | 5.3 | | | 5.1 | 5.1 | | 56.0 | |
| 58.0 | | 5.5/57.8m | 5.6 | | | 5.1 | 5.1 | | | 4.9 | 4.9 | | 58.0 | |
| 60.0 | | | 5.3 | | | 4.9 | 4.9 | | | 4.7 | 4.7 | | 60.0 | |
| 62.0 | | | 5.1 | 4.6/63.1m | | 5.0/60.8m | 4.9 | | | 4.4/63.7m | 4.5 | | 62.0 | |
| 64.0 | | | 4.9 | 4.4 | | | 4.7 | 4.1/65.1m | | | 4.3 | 3.6/67.1m | 64.0 | |
| 66.0 | | | 4.7 | 4.2 | | | 4.5 | 4.0 | | | 4.1 | 3.5 | 66.0 | |
| 68.0 | | | 4.5/67.5m | 4.0 | | | 4.3 | 3.7 | | | 3.9 | 3.3 | 68.0 | |
| 70.0 | | | | 3.8 | | | 4.1 | 3.5 | | | 3.7 | 3.1 | 70.0 | |
| 72.0 | | | | 3.6 | | | 4.1/70.4m | 3.3 | | | 3.2 | | 72.0 | |
| 74.0 | | | | 3.4 | | | | 3.2 | | | 3.6/73.4m | | 74.0 | |
| 76.0 | | | | 3.2 | | | | 3.0 | | | | | 76.0 | |
| 78.0 | | | | 3.2/76.5m | | | | 2.8 | | | | | 78.0 | |
| 接地圧 | 前方自立時 | 54.8 t/m ² | | | | 53.0 t/m ² | | | | 49.3 t/m ² | | | | 前方自立時 |
| 接地圧 | 作業時最大 | 70.0 t/m ² | | | | 68.8 t/m ² | | | | 68.1 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

▶ タワー長さ 61.0m (200t 級能力)

(94.5t カウンタウエイト / カーボディウエイトあり) (オプション)



(単位：t)

| タワー長さm | | 61.0 | | | | | | | | | | | | タワー長さm |
|----------|-------|-----------------------|------------|------------|-----------|-----------------------|------------|------------|-----------|-----------------------|------------|-----------|-----------|--------|
| ジブ長さm | | 27.4 | | | | 30.5 | | | | 33.5 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径 (m) | 9.0 | 25.2/9.6m | | | | | | | | | | | | 9.0 |
| | 10.0 | 25.2 | | | | 25.2/10.2m | | | | 25.2/10.8m | | | | 10.0 |
| | 12.0 | 25.2 | | | | 25.2 | | | | 25.2 | | | | 12.0 |
| | 14.0 | 25.2 | | | | 25.2 | | | | 25.2 | | | | 14.0 |
| | 16.0 | 24.8 | | | | 24.8 | | | | 24.2 | | | | 16.0 |
| | 18.0 | 23.9 | | | | 23.9 | | | | 23.3 | | | | 18.0 |
| | 20.0 | 23.0 | | | | 22.8 | | | | 22.2 | | | | 20.0 |
| | 22.0 | 21.6 | | | | 21.6 | | | | 21.1 | | | | 22.0 |
| | 24.0 | 20.0 | 20.9/24.7m | | | 20.1 | 19.4/25.8m | | | 20.0 | | | | 24.0 |
| | 26.0 | 18.3 | 18.9 | | | 18.6 | 19.0 | | | 18.8 | 18.0/26.9m | | | 26.0 |
| | 28.0 | 16.3 | 17.1 | | | 16.7 | 17.0 | | | 16.7 | 16.7 | | | 28.0 |
| | 30.0 | 11.3 | 15.5 | | | 15.1 | 15.4 | | | 15.3 | 15.3 | | | 30.0 |
| | 32.0 | 10.0/30.1m | 14.3 | | | 12.0 | 14.2 | | | 14.0 | 14.1 | | | 32.0 |
| | 34.0 | | 13.1 | | | 8.8/33.1m | 13.0 | | | 10.8 | 12.9 | | | 34.0 |
| | 36.0 | | 12.1 | | | | 12.0 | | | 7.8 | 11.9 | | | 36.0 |
| | 38.0 | | 11.3 | 11.0/39.1m | | | 11.2 | | | | 11.2 | | | 38.0 |
| | 40.0 | | 10.5 | 10.6 | | | 10.5 | 10.4/40.7m | | | 10.4 | | | 40.0 |
| | 42.0 | | 10.3/40.7m | 10.0 | | | 9.7 | 9.9 | | | 9.8 | 9.1/42.3m | | 42.0 |
| | 44.0 | | | 9.4 | | | 9.3/43.6m | 9.2 | | | 9.0 | 9.0 | | 44.0 |
| | 46.0 | | | 8.8 | | | | 8.7 | | | 8.5 | 8.6 | | 46.0 |
| | 48.0 | | | 8.4 | | | | 8.2 | | | 8.5/46.6m | 8.1 | | 48.0 |
| | 50.0 | | | 8.0 | | | | 7.8 | | | | 7.7 | | 50.0 |
| | 52.0 | | | 7.8/50.9m | 6.9/52.3m | | | 7.4 | | | | 7.3 | | 52.0 |
| | 54.0 | | | | 6.7 | | | 7.0/53.8m | 6.4/54.4m | | | 6.8 | | 54.0 |
| | 56.0 | | | | 6.4 | | | | 6.1 | | | 6.5 | 5.8/56.4m | 56.0 |
| | 58.0 | | | | 6.0 | | | | 5.8 | | | 6.4/56.8m | 5.6 | 58.0 |
| | 60.0 | | | | 5.7 | | | | 5.5 | | | | 5.3 | 60.0 |
| | 62.0 | | | | 5.7/60.3m | | | | 5.2 | | | | 5.0 | 62.0 |
| 64.0 | | | | | | | | 5.0/63.3m | | | | 4.7 | 64.0 | |
| 66.0 | | | | | | | | | | | | 4.5 | 66.0 | |
| 68.0 | | | | | | | | | | | | 4.5/66.2m | 68.0 | |
| 接地 | 前方自立時 | 65.8 t/m ² | | | | 68.5 t/m ² | | | | 71.2 t/m ² | | | | 前方自立時 |
| 接地 | 作業時最大 | 65.4 t/m ² | | | | 65.9 t/m ² | | | | 67.8 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

※ジブ長さ 27.4m での、ボールフックの使用はできません。

(単位：t)

| タワー長さm | | 61.0 | | | | | | | | | | | | タワー長さm |
|----------|-------|-----------------------|------------|-----------|-----------|-----------------------|------------|-----------|-----------|-----------------------|------------|-----------|-----------|--------|
| ジブ長さm | | 36.6 | | | | 39.6 | | | | 42.7 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径 (m) | 10.0 | 24.2/11.5m | | | | | | | | | | | | 10.0 |
| | 12.0 | 24.2 | | | | 23.7/12.1m | | | | 21.0/12.7m | | | | 12.0 |
| | 14.0 | 23.8 | | | | 22.4 | | | | 20.4 | | | | 14.0 |
| | 16.0 | 23.2 | | | | 21.7 | | | | 20.0 | | | | 16.0 |
| | 18.0 | 22.4 | | | | 21.1 | | | | 19.5 | | | | 18.0 |
| | 20.0 | 21.6 | | | | 20.4 | | | | 18.8 | | | | 20.0 |
| | 22.0 | 20.8 | | | | 19.8 | | | | 18.3 | | | | 22.0 |
| | 24.0 | 19.9 | | | | 19.1 | | | | 17.7 | | | | 24.0 |
| | 26.0 | 18.8 | | | | 18.3 | | | | 17.1 | | | | 26.0 |
| | 28.0 | 16.8 | 16.5/28.1m | | | 16.8 | 15.5/29.2m | | | 16.5 | | | | 28.0 |
| | 30.0 | 15.3 | 15.2 | | | 15.2 | 15.0 | | | 15.2 | 14.8/30.4m | | | 30.0 |
| | 32.0 | 14.1 | 14.0 | | | 14.1 | 13.9 | | | 14.0 | 13.7 | | | 32.0 |
| | 34.0 | 12.9 | 12.8 | | | 12.9 | 12.7 | | | 12.8 | 12.6 | | | 34.0 |
| | 36.0 | 11.5 | 11.8 | | | 11.9 | 11.7 | | | 11.8 | 11.6 | | | 36.0 |
| | 38.0 | 8.2 | 11.1 | | | 10.7 | 11.0 | | | 10.9 | 10.8 | | | 38.0 |
| | 40.0 | 6.9/39.0m | 10.3 | | | 8.1 | 10.2 | | | 9.8 | 10.0 | | | 40.0 |
| | 42.0 | | 9.7 | 9.2/43.9m | | 6.1/41.9m | 9.6 | | | 7.9 | 9.4 | | | 42.0 |
| | 44.0 | | 9.1 | 9.2 | | | 9.0 | 8.1/45.5m | | 6.2 | 8.8 | | | 44.0 |
| | 46.0 | | 8.5 | 8.5 | | | 8.4 | 8.0 | | 5.3/44.8m | 8.2 | 7.6/47.1m | | 46.0 |
| | 48.0 | | 7.9 | 8.0 | | | 7.8 | 7.8 | | | 7.6 | 7.4 | | 48.0 |
| | 50.0 | | 7.6/49.5m | 7.6 | | | 7.3 | 7.4 | | | 7.2 | 7.1 | | 50.0 |
| | 52.0 | | | 7.2 | | | 6.9 | 7.0 | | | 6.7 | 6.7 | | 52.0 |
| | 54.0 | | | 6.8 | | | 6.9/52.5m | 6.6 | | | 6.3 | 6.3 | | 54.0 |
| | 56.0 | | | 6.4 | | | | 6.2 | | | 6.0/55.4m | 6.0 | | 56.0 |
| | 58.0 | | | 6.1 | 5.3/58.5m | | | 5.9 | | | | 5.7 | | 58.0 |
| | 60.0 | | | 5.9/59.7m | 5.1 | | | 5.7 | 4.7/60.5m | | | 5.5 | | 60.0 |
| | 62.0 | | | | 4.8 | | | 5.5 | 4.6 | | | 5.3 | 4.3/62.5m | 62.0 |
| | 64.0 | | | | 4.6 | | | 5.4/62.6m | 4.3 | | | 5.1 | 4.1 | 64.0 |
| 66.0 | | | | 4.3 | | | | 4.1 | | | 4.9/65.6m | 3.9 | 66.0 | |
| 68.0 | | | | 4.1 | | | | 3.9 | | | | 3.7 | 68.0 | |
| 70.0 | | | | 4.0/69.2m | | | | 3.7 | | | | 3.5 | 70.0 | |
| 72.0 | | | | | | | | 3.5 | | | | 3.3 | 72.0 | |
| 74.0 | | | | | | | | 3.5/72.1m | | | | 3.1 | 74.0 | |
| 76.0 | | | | | | | | | | | | 3.0/75.1m | 76.0 | |
| 接地 | 前方自立時 | 71.9 t/m ² | | | | 72.3 t/m ² | | | | 73.9 t/m ² | | | | 前方自立時 |
| 接地 | 作業時最大 | 68.3 t/m ² | | | | 68.3 t/m ² | | | | 69.4 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

(単位：t)

| タワー長さm | | 61.0 | | | | | | | | | タワー長さm | |
|-------------|-------|-----------------------|------------|-----------|-----------------------|-----------|------------|-----------------------|------------|------------|--------|-------|
| ジブ長さm | | 45.7 | | | 48.8 | | | 51.8 | | | ジブ長さm | |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 90° | 80° | 70° | タワー角度 |
| 作業半径 (m) | 12.0 | 18.5/13.3m | | | | 16.7 | | | 14.8/14.6m | | | 12.0 |
| | 14.0 | 18.3 | | | | | | | | | | 14.0 |
| | 16.0 | 17.8 | | | | 15.9 | | | 14.3 | | | 16.0 |
| | 18.0 | 17.3 | | | | 15.4 | | | 14.0 | | | 18.0 |
| | 20.0 | 16.8 | | | | 15.0 | | | 13.6 | | | 20.0 |
| | 22.0 | 16.3 | | | | 14.6 | | | 13.1 | | | 22.0 |
| | 24.0 | 15.8 | | | | 14.0 | | | 12.7 | | | 24.0 |
| | 26.0 | 15.3 | | | | 13.6 | | | 12.2 | | | 26.0 |
| | 28.0 | 14.8 | | | | 13.2 | | | 11.8 | | | 28.0 |
| | 30.0 | 14.2 | 13.6/31.5m | | | 12.7 | | | 11.4 | | | 30.0 |
| | 32.0 | 13.6 | 13.4 | | | 12.2 | 11.9/32.7m | | 11.0 | 10.4/33.8m | | 32.0 |
| | 34.0 | 12.6 | 12.5 | | | 11.7 | 11.6 | | 10.5 | 10.3 | | 34.0 |
| | 36.0 | 11.6 | 11.5 | | | 10.9 | 11.2 | | 9.9 | 9.9 | | 36.0 |
| | 38.0 | 10.5 | 10.7 | | | 10.0 | 10.3 | | 9.2 | 9.5 | | 38.0 |
| | 40.0 | 9.6 | 9.9 | | | 9.4 | 9.5 | | 8.6 | 8.9 | | 40.0 |
| | 42.0 | 8.8 | 9.2 | | | 8.6 | 8.8 | | 8.0 | 8.4 | | 42.0 |
| | 44.0 | 8.1 | 8.6 | | | 7.9 | 8.2 | | 7.5 | 7.8 | | 44.0 |
| | 46.0 | 6.3 | 8.0 | | | 7.3 | 7.7 | | 7.0 | 7.3 | | 46.0 |
| | 48.0 | 4.6/47.8m | 7.4 | 7.0/48.8m | | 6.6 | 7.1 | | 6.4 | 6.8 | | 48.0 |
| | 50.0 | | 7.0 | 6.8 | | 4.6 | 6.7 | 6.4/50.4m | 5.8 | 6.4 | | 50.0 |
| | 52.0 | | 6.6 | 6.5 | | 4.2/50.7m | 6.3 | 6.1 | 4.5 | 6.0 | 5.7 | 52.0 |
| | 54.0 | | 6.1 | 6.1 | | | 5.9 | 5.8 | 3.6/53.7m | 5.6 | 5.4 | 54.0 |
| | 56.0 | | 5.8 | 5.8 | | | 5.5 | 5.5 | | 5.3 | 5.2 | 56.0 |
| | 58.0 | | 5.5 | 5.5 | | | 5.2 | 5.2 | | 4.9 | 4.9 | 58.0 |
| | 60.0 | | 5.5/58.4m | 5.3 | | | 5.0 | 5.0 | | 4.7 | 4.7 | 60.0 |
| | 62.0 | | | 5.1 | | | 4.8/61.3m | 4.8 | | 4.5 | 4.5 | 62.0 |
| | 64.0 | | | 4.9 | 3.8/64.6m | | | 4.6 | | 4.2 | 4.3 | 64.0 |
| | 66.0 | | | 4.7 | 3.7 | | | 4.4 | | 4.5/64.2m | 4.1 | 66.0 |
| 68.0 | | | 4.4 | 3.5 | | | 4.2 | | | 3.9 | 68.0 | |
| 70.0 | | | 4.3/68.5m | 3.3 | | | 4.0 | | | 3.7 | 70.0 | |
| 72.0 | | | | 3.1 | | | 3.9/71.5m | | | 3.5 | 72.0 | |
| 74.0 | | | | | | | | | | 3.3 | 74.0 | |
| 76.0 | | | | | | | | | | 3.3/74.4m | 76.0 | |
| 接地圧 | 前方自立時 | 73.3 t/m ² | | | 71.7 t/m ² | | | 69.8 t/m ² | | | 前方自立時 | 接地圧 |
| | 作業時最大 | 68.8 t/m ² | | | 51.9 t/m ² | | | 51.6 t/m ² | | | 作業時最大 | |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

▶ タワー長さ 64.1m (200t 級能力)

(94.5t カウンタウエイト / カーボディウエイトあり) (オプション)



(単位: t)

| タワー長さm | 64.1 | | | | | | | | | | | | | | | | タワー長さm | | |
|--------|------------|-----------------------|------------|-----------|------------|-----------------------|-----------|-----|------------|------------------------|-----------|-----|------------|------------------------|-----------|-----|--------|-------|-----|
| ジブ長さm | 27.4 | | | | 30.5 | | | | 33.5 | | | | 36.6 | | | | ジブ長さm | | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | | |
| 9.0 | 25.2/9.6m | | | | | | | | | | | | | | | | 9.0 | | |
| 10.0 | 25.2 | | | | 25.2/10.2m | | | | 24.9/10.8m | | | | 24.1/11.4m | | | | 10.0 | | |
| 12.0 | 25.2 | | | | 25.2 | | | | 24.9 | | | | 24.1 | | | | 12.0 | | |
| 14.0 | 24.5 | | | | 24.5 | | | | 24.5 | | | | 23.7 | | | | 14.0 | | |
| 16.0 | 23.9 | | | | 23.8 | | | | 23.7 | | | | 23.0 | | | | 16.0 | | |
| 18.0 | 23.2 | | | | 23.1 | | | | 23.0 | | | | 22.3 | | | | 18.0 | | |
| 20.0 | 22.4 | | | | 22.4 | | | | 22.1 | | | | 21.4 | | | | 20.0 | | |
| 22.0 | 21.6 | | | | 21.6 | | | | 21.1 | | | | 20.7 | | | | 22.0 | | |
| 24.0 | 20.0 | 19.4/25.2m | | | 20.0 | | | | 20.0 | | | | 19.9 | | | | 24.0 | | |
| 26.0 | 18.3 | 18.6 | | | 18.6 | 18.3/26.3m | | | 18.8 | 16.4/27.5m | | | 18.8 | | | | 26.0 | | |
| 28.0 | 16.3 | 17.1 | | | 16.7 | 16.9 | | | 16.7 | 16.2 | | | 16.8 | 15.9/28.6m | | | 28.0 | | |
| 30.0 | 11.3 | 15.5 | | | 15.1 | 15.4 | | | 15.3 | 15.3 | | | 15.3 | 15.1 | | | 30.0 | | |
| 32.0 | 10.0/30.1m | 14.3 | | | 12.0 | 14.2 | | | 14.0 | 14.1 | | | 14.1 | 14.0 | | | 32.0 | | |
| 34.0 | | 13.1 | | | 8.8/33.1m | 13.0 | | | 10.8 | 12.9 | | | 12.9 | 12.8 | | | 34.0 | | |
| 36.0 | | 12.0 | | | | 12.0 | | | 7.8 | 11.9 | | | 11.5 | 11.8 | | | 36.0 | | |
| 38.0 | | 11.3 | | | | 11.2 | | | | 11.2 | | | 8.2 | 11.1 | | | 38.0 | | |
| 40.0 | | 10.5 | 10.7/40.1m | | 10.5 | 9.7/41.7m | | | | 10.4 | | | 6.9/39.0m | 10.3 | | | 40.0 | | |
| 42.0 | | 10.1/41.2m | 10.0 | | 9.7 | 9.6 | | | 9.8 | 9.5/43.3m | | | | 9.7 | | | 42.0 | | |
| 44.0 | | | 9.3 | | 9.1 | 9.2 | | | 9.0 | 9.3 | | | 9.1 | 8.6/45.0m | | | 44.0 | | |
| 46.0 | | | 8.8 | | 9.0/44.2m | 8.7 | | | 8.5 | 8.6 | | | 8.5 | 8.3 | | | 46.0 | | |
| 48.0 | | | 8.4 | | | 8.2 | | | 8.3/47.1m | 8.1 | | | 7.9 | 8.0 | | | 48.0 | | |
| 50.0 | | | 7.9 | | | 7.8 | | | | 7.7 | | | 7.4 | 7.6 | | | 50.0 | | |
| 52.0 | | 7.5/51.9m | 6.1/53.9m | | | 7.4 | | | | 7.3 | | | | 7.1 | | | 52.0 | | |
| 54.0 | | | 6.1 | | | 7.0 | 5.5/55.9m | | | 6.8 | | | | 6.7 | | | 54.0 | | |
| 56.0 | | | 5.7 | | | 6.8/54.9m | 5.4 | | | 6.5 | 4.9/57.9m | | | 6.4 | | | 56.0 | | |
| 58.0 | | | 5.4 | | | | 5.1 | | | 6.3/57.8m | 4.9 | | | 6.1 | | | 58.0 | | |
| 60.0 | | | 5.1 | | | | 4.9 | | | | 4.7 | | | 5.8 | 4.5 | | 60.0 | | |
| 62.0 | | | | 4.9/61.9m | | | 4.6 | | | | 4.4 | | | 5.7/60.7m | 4.2 | | 62.0 | | |
| 64.0 | | | | | | | 4.4 | | | | 4.2 | | | | 4.0 | | 64.0 | | |
| 66.0 | | | | | | | 4.3/64.8m | | | | 4.0 | | | | 3.8 | | 66.0 | | |
| 68.0 | | | | | | | | | | | 3.8/67.8m | | | | 3.6 | | 68.0 | | |
| 70.0 | | | | | | | | | | | | | | | 3.4 | | 70.0 | | |
| 72.0 | | | | | | | | | | | | | | | 3.3/70.7m | | 72.0 | | |
| 接地圧 | 前方自立時 | 92.3 t/m ² | | | | 98.3 t/m ² | | | | 104.4 t/m ² | | | | 106.5 t/m ² | | | | 前方自立時 | 接地圧 |
| | 作業時最大 | 65.8 t/m ² | | | | 66.6 t/m ² | | | | 68.5 t/m ² | | | | 68.7 t/m ² | | | | 作業時最大 | 接地圧 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

(単位: t)

| タワー長さm | 64.1 | | | | | | | | | | | | | | | | タワー長さm | | | | | | |
|--------|------------|------------------------|-----------|-----|------------|------------------------|-----------|-----------|------------|------------------------|-----------|-----|-----------|------------------------|-----|-----|------------|------------------------|-----------|-----|-------|-------|-----|
| ジブ長さm | 39.6 | | | | 42.7 | | | | 45.7 | | | | 48.8 | | | | 51.8 | | | | ジブ長さm | | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | | |
| 12.0 | 22.7/12.1m | | | | 21.1/12.7m | | | | 19.1/13.3m | | | | | | | | | | | | 12.0 | | |
| 14.0 | 22.2 | | | | 20.2 | | | | 18.7 | | | | 16.4 | | | | 14.8/14.6m | | | | 14.0 | | |
| 16.0 | 21.5 | | | | 19.8 | | | | 17.7 | | | | 15.8 | | | | 14.3 | | | | 16.0 | | |
| 18.0 | 20.9 | | | | 19.3 | | | | 17.1 | | | | 15.3 | | | | 14.0 | | | | 18.0 | | |
| 20.0 | 20.2 | | | | 18.7 | | | | 16.6 | | | | 14.9 | | | | 13.6 | | | | 20.0 | | |
| 22.0 | 19.6 | | | | 18.2 | | | | 16.2 | | | | 14.4 | | | | 13.1 | | | | 22.0 | | |
| 24.0 | 19.0 | | | | 17.6 | | | | 15.7 | | | | 13.9 | | | | 12.7 | | | | 24.0 | | |
| 26.0 | 18.3 | | | | 17.1 | | | | 15.2 | | | | 13.5 | | | | 12.1 | | | | 26.0 | | |
| 28.0 | 16.8 | 14.6/29.8m | | | 16.5 | | | | 14.7 | | | | 13.1 | | | | 11.7 | | | | 28.0 | | |
| 30.0 | 15.2 | 14.5 | | | 15.2 | 13.3/30.9m | | | 14.2 | | | | 12.7 | | | | 11.3 | | | | 30.0 | | |
| 32.0 | 14.0 | 13.9 | | | 14.0 | 13.0 | | | 13.6 | 12.7 | | | 12.2 | 11.5/33.2m | | | 10.9 | | | | 32.0 | | |
| 34.0 | 12.9 | 12.7 | | | 12.8 | 12.5 | | | 12.6 | 12.3 | | | 11.7 | 11.4 | | | 10.5 | | | | 34.0 | | |
| 36.0 | 11.8 | 11.7 | | | 11.8 | 11.6 | | | 11.6 | 11.4 | | | 10.9 | 11.0 | | | 9.9 | 9.3 | | | 36.0 | | |
| 38.0 | 10.7 | 11.0 | | | 10.9 | 10.8 | | | 10.5 | 10.6 | | | 10.0 | 10.2 | | | 9.2 | 8.9 | | | 38.0 | | |
| 40.0 | 8.2 | 10.2 | | | 9.7 | 10.0 | | | 9.6 | 9.9 | | | 9.4 | 9.5 | | | 8.6 | 8.5 | | | 40.0 | | |
| 42.0 | 6.1/41.9m | 9.6 | | | 8.8 | 9.4 | | | 8.8 | 9.2 | | | 8.6 | 8.8 | | | 8.0 | 8.1 | | | 42.0 | | |
| 44.0 | | 9.0 | | | 6.2 | 8.8 | | | 7.9 | 8.6 | | | 7.9 | 8.2 | | | 7.5 | 7.5 | | | 44.0 | | |
| 46.0 | | 8.4 | 8.1/46.6m | | 5.3/44.8m | 8.2 | | | 6.3 | 8.0 | | | 7.2 | 7.7 | | | 6.9 | 7.0 | | | 46.0 | | |
| 48.0 | | 7.8 | 7.7 | | | 7.6 | 7.5/48.2m | 4.6/47.8m | 7.4 | 6.9/49.8m | | | 6.4 | 7.1 | | | 6.3 | 6.5 | | | 48.0 | | |
| 50.0 | | 7.3 | 7.3 | | | 7.1 | 7.1 | | 7.0 | 6.9 | 4.6 | | 6.7 | 6.2/51.4m | | | 5.6 | 6.1 | | | 50.0 | | |
| 52.0 | | 6.8 | 6.9 | | | 6.7 | 6.7 | | 6.5 | 6.5 | 4.2/50.7m | | 6.3 | 6.1 | | | 5.0 | 5.7 | 5.0/53.0m | | 52.0 | | |
| 54.0 | | 6.7/53.0m | 6.5 | | | 6.2 | 6.3 | | 6.1 | 6.1 | | | 5.9 | 5.8 | | | 3.6/53.7m | 5.3 | 5.0 | | 54.0 | | |
| 56.0 | | | 6.2 | | | 5.9/55.9m | 6.0 | | 5.8 | 5.8 | | | 5.5 | 5.5 | | | 5.0 | 4.9 | | | 56.0 | | |
| 58.0 | | | 5.9 | | | | 5.7 | | 5.5 | 5.5 | | | 5.2 | 5.2 | | | 4.7 | 4.6 | | | 58.0 | | |
| 60.0 | | | 5.7 | | | | 5.5 | | 5.3/58.9m | 5.3 | | | 5.0 | 5.0 | | | 4.4 | 4.4 | | | 60.0 | | |
| 62.0 | | | 5.5 | 4.0 | | | 5.3 | | | 5.1 | | | 4.7/61.8m | 4.8 | | | 4.2 | 4.2 | | | 62.0 | | |
| 64.0 | | | 5.3/63.7m | 3.7 | | | 5.1 | | | 4.9 | | | 4.6 | | | | 3.9 | 4.0 | | | 64.0 | | |
| 66.0 | | | | 3.5 | | | 4.8 | | | 4.7 | | | 4.4 | | | | 3.8/64.8m | 3.8 | | | 66.0 | | |
| 68.0 | | | | 3.3 | | | 4.7/66.6m | | | 4.4 | | | 4.2 | | | | | 3.6 | | | 68.0 | | |
| 70.0 | | | | 3.1 | | | | | | 4.3/69.6m | | | 4.0 | | | | | 3.4 | | | 70.0 | | |
| 72.0 | | | | | | | | | | | | | 3.8 | | | | | 3.2 | | | 72.0 | | |
| 74.0 | | | | | | | | | | | | | 3.7/72.5m | | | | | 3.1 | | | 74.0 | | |
| 76.0 | | | | | | | | | | | | | | | | | | 2.9/75.5m | | | 76.0 | | |
| 接地圧 | 前方自立時 | 107.8 t/m ² | | | | 112.5 t/m ² | | | | 112.2 t/m ² | | | | 110.3 t/m ² | | | | 110.1 t/m ² | | | | 前方自立時 | 接地圧 |
| | 作業時最大 | 67.0 t/m ² | | | | 54.3 t/m ² | | | | 55.3 t/m ² | | | | 54.9 t/m ² | | | | 52.7 t/m ² | | | | 作業時最大 | 接地圧 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

▶ **タワー長さ 36.6m**

(72.0t カウンタウエイト / カーボディウエイトなし) (オプション)

(単位: t)

| タワー長さm | 36.6 | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|------------|------------|------------|-----------------------|------------|-----------|--------|-------|
| ジブ長さm | 27.4 | | | | 30.5 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 9.0 | 27.0/9.5m | | | | | | | | 9.0 | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 14.0 | |
| 16.0 | 27.0 | | | | 27.0 | | | | 16.0 | |
| 18.0 | 27.0 | | | | 26.4 | | | | 18.0 | |
| 20.0 | 25.3 | 26.4/20.4m | | | 24.6 | 26.4/21.6m | | | 20.0 | |
| 22.0 | 23.3 | 26.4 | | | 22.9 | 26.4 | | | 22.0 | |
| 24.0 | 21.3 | 25.5 | | | 21.3 | 25.1 | | | 24.0 | |
| 26.0 | 19.4 | 23.2 | | | 19.6 | 23.2 | | | 26.0 | |
| 28.0 | 15.8 | 21.2 | | | 17.8 | 21.2 | | | 28.0 | |
| 30.0 | 10.9 | 19.4 | 17.4/30.7m | | 15.2 | 19.4 | | | 30.0 | |
| 32.0 | 10.4/30.1m | 18.0 | 16.6 | | 11.6 | 18.0 | 16.1/32.3m | | 32.0 | |
| 34.0 | | 16.5 | 15.3 | | 9.3/33.1m | 16.7 | 15.1 | | 34.0 | |
| 36.0 | | 14.5 | 14.3 | | | 15.5 | 14.1 | | 36.0 | |
| 38.0 | | 13.5/36.5m | 13.3 | | | 14.0 | 13.1 | | 38.0 | |
| 40.0 | | | 12.4 | 10.7/40.1m | | 11.9/39.4m | 12.3 | | 40.0 | |
| 42.0 | | | 11.7 | 10.1 | | | 11.5 | | 42.0 | |
| 44.0 | | | 11.5/42.5m | 9.5 | | | 10.8 | 9.3 | 44.0 | |
| 46.0 | | | | 8.9 | | | 10.4/45.5m | 8.7 | 46.0 | |
| 48.0 | | | | 8.4 | | | | 8.2 | 48.0 | |
| 50.0 | | | | 8.4/48.2m | | | | 7.8 | 50.0 | |
| 52.0 | | | | | | | | 7.5/51.1m | 52.0 | |
| 接地圧 | 前方自立時 | 19.2 t/m ² | | | | 18.7 t/m ² | | | | 前方自立時 |
| 接地圧 | 作業時最大 | 49.7 t/m ² | | | | 51.0 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

▶ **タワー長さ 39.7m**

(72.0t カウンタウエイト / カーボディウエイトなし) (オプション)


(単位: t)

| タワー長さm | 39.7 | | | | | | | | タワー長さm | | | | | |
|--------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|-----------|-------|-------|
| ジブ長さm | 27.4 | | | | 30.5 | | | | 33.5 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | 9.0 | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 14.0 | |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 16.0 | |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.2 | | | | 18.0 | |
| 20.0 | 25.3 | 26.4/21.0m | | | 24.6 | | | | 24.3 | | | | 20.0 | |
| 22.0 | 23.3 | 26.4 | | | 22.9 | 26.4/22.1m | | | 22.5 | 25.0/23.2m | | | 22.0 | |
| 24.0 | 21.3 | 25.2 | | | 21.3 | 24.8 | | | 21.1 | 24.3 | | | 24.0 | |
| 26.0 | 19.4 | 23.1 | | | 19.6 | 22.9 | | | 19.5 | 22.4 | | | 26.0 | |
| 28.0 | 15.9 | 21.1 | | | 17.8 | 21.1 | | | 17.8 | 20.8 | | | 28.0 | |
| 30.0 | 11.0 | 19.4 | 16.2/31.8m | | 15.3 | 19.4 | | | 16.3 | 19.4 | | | 30.0 | |
| 32.0 | 10.6/30.1m | 18.0 | 16.0 | | 11.7 | 18.0 | 15.0/33.4m | | 14.6 | 18.0 | | | 32.0 | |
| 34.0 | | 16.5 | 14.8 | | 9.5/33.1m | 16.7 | 14.6 | | 11.6 | 16.7 | 14.0/35.0m | | 34.0 | |
| 36.0 | | 14.7 | 13.8 | | | 15.4 | 13.6 | | 8.3 | 15.6 | 13.5 | | 36.0 | |
| 38.0 | | 13.6/37.0m | 12.9 | | | 14.1 | 12.7 | | | 14.5 | 12.5 | | 38.0 | |
| 40.0 | | | 12.0 | 9.6/41.7m | | 12.0/39.9m | 11.9 | | | 13.2 | 11.7 | | 40.0 | |
| 42.0 | | | 11.3 | 9.5 | | | 11.1 | | | 11.9 | 11.0 | | 42.0 | |
| 44.0 | | | 10.8/43.6m | 8.9 | | | 10.5 | 8.7 | | 10.6/42.9m | 10.3 | 8.0/45.8m | 44.0 | |
| 46.0 | | | | 8.4 | | | 9.8 | 8.2 | | | 9.7 | 8.0 | 46.0 | |
| 48.0 | | | | 7.9 | | | 9.7/46.5m | 7.7 | | | 9.2 | 7.5 | 48.0 | |
| 50.0 | | | | 7.5/49.7m | | | | 7.2 | | | 8.8/49.5m | 7.1 | 50.0 | |
| 52.0 | | | | | | | | 6.8 | | | | 6.7 | 52.0 | |
| 54.0 | | | | | | | | 6.7/52.6m | | | | 6.3 | 54.0 | |
| 56.0 | | | | | | | | | | | | 6.0/55.6m | 56.0 | |
| 接地圧 | 前方自立時 | 22.7 t/m ² | | | | 22.7 t/m ² | | | | 22.1 t/m ² | | | | 前方自立時 |
| 接地圧 | 作業時最大 | 51.0 t/m ² | | | | 52.7 t/m ² | | | | 54.2 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

▶ タワー長さ 42.7m

(72.0t カウンタウエイト / カーボディウエイトなし) (オプション)




(単位: t)

| タワー長さm | | 42.7 | | | | | | | | | | | | | | | | タワー長さm | |
|----------|-------|-----------------------|------------|------------|-----|-----------------------|------------|------------|-----------|-----------------------|------------|-----------|-----------|-----------------------|-----|-----------|------------|------------|------|
| ジブ長さm | | 27.4 | | | | 30.5 | | | | 33.5 | | | | 36.6 | | | | ジブ長さm | |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 作業半径 (m) | 9.0 | 27.0/9.5m | | | | | | | | | | | | | | | | 9.0 | |
| | 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | | | | 27.0/11.4m | 10.0 | |
| | 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | | 27.0 | 12.0 | |
| | 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | | 27.0 | 14.0 | |
| | 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | | | 26.4 | 16.0 | |
| | 18.0 | 27.0 | | | | 26.4 | | | | 26.2 | | | | | | | 26.0 | 18.0 | |
| | 20.0 | 25.3 | 26.4/21.5m | | | 24.6 | | | | 24.3 | | | | | | | 24.1 | 20.0 | |
| | 22.0 | 23.3 | 26.4 | | | 22.9 | 26.0/22.6m | | | 22.5 | 24.3/23.8m | | | | | | 22.3 | 22.0 | |
| | 24.0 | 21.3 | 25.0 | | | 21.3 | 24.5 | | | 21.1 | 24.0 | | | | | 20.7 | 22.7/24.9m | 24.0 | |
| | 26.0 | 19.2 | 23.0 | | | 19.6 | 22.6 | | | 19.5 | 22.2 | | | | | 19.1 | 21.7 | 26.0 | |
| | 28.0 | 16.0 | 21.1 | | | 17.8 | 20.9 | | | 17.8 | 20.5 | | | | | 17.8 | 20.2 | 28.0 | |
| | 30.0 | 11.2 | 19.4 | | | 15.4 | 19.4 | | | 16.3 | 19.2 | | | | | 16.5 | 18.9 | 30.0 | |
| | 32.0 | 10.7/30.1m | 17.9 | 15.0/32.8m | | 11.8 | 17.9 | | | 14.7 | 17.8 | | | | | 15.2 | 17.6 | 32.0 | |
| | 34.0 | | 16.5 | 14.3 | | 9.6/33.1m | 16.7 | 13.9/34.4m | | 11.7 | 16.6 | | | | | 13.9 | 16.4 | 34.0 | |
| | 36.0 | | 14.8 | 13.3 | | | 15.4 | 13.1 | | 8.4 | 15.4 | 12.9 | | | | 11.4 | 15.3 | 12.1/37.7m | 36.0 |
| | 38.0 | | 13.3/37.5m | 12.4 | | | 14.1 | 12.2 | | | 14.4 | 12.1 | | | | 8.9 | 14.4 | 11.9 | 38.0 |
| | 40.0 | | | 11.6 | | | 12.5 | 11.4 | | | 13.2 | 11.3 | | | | 7.5/39.0m | 13.4 | 11.1 | 40.0 |
| | 42.0 | | | 10.9 | | | 12.0/40.5m | 10.7 | | | 12.0 | 10.6 | | | | | 12.4 | 10.4 | 42.0 |
| | 44.0 | | | 10.2 | 8.3 | | | 10.1 | 7.7/45.2m | | 10.7/43.4m | 9.9 | | | | | 11.4 | 9.8 | 44.0 |
| | 46.0 | | | 10.0/44.6m | 7.7 | | | 9.5 | 7.5 | | | 9.3 | 7.0/47.3m | | | | 10.1 | 9.2 | 46.0 |
| 48.0 | | | | 7.3 | | | | 9.1/47.6m | 7.0 | | | 8.8 | 6.8 | | | 9.6/46.3m | 8.7 | 6.4/49.3m | 48.0 |
| 50.0 | | | | 6.9 | | | | | 6.6 | | | 8.3 | 6.4 | | | | 8.2 | 6.2 | 50.0 |
| 52.0 | | | | 6.6/51.2m | | | | | 6.2 | | | 8.2/50.5m | 6.0 | | | | 7.8 | 5.9 | 52.0 |
| 54.0 | | | | | | | | | 5.9 | | | | 5.7 | | | | 7.5/53.4m | 5.5 | 54.0 |
| 56.0 | | | | | | | | | 5.8/54.1m | | | | 5.4 | | | | | 5.2 | 56.0 |
| 58.0 | | | | | | | | | | | | | 5.2/57.1m | | | | | 4.9 | 58.0 |
| 60.0 | | | | | | | | | | | | | | | | | | 4.7 | 60.0 |
| 接地圧 | 前方自立時 | 26.9 t/m ² | | | | 27.0 t/m ² | | | | 26.9 t/m ² | | | | 25.7 t/m ² | | | | 前方自立時 | |
| | 作業時最大 | 53.5 t/m ² | | | | 55.0 t/m ² | | | | 56.2 t/m ² | | | | 57.6 t/m ² | | | | 作業時最大 | |

※表中の大太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

▶ タワー長さ 45.8m

(72.0t カウンタウエイト / カーボディウエイトなし) (オプション)




(単位: t)

| タワー長さm | | 45.8 | | | | | | | | | | | | | | | | タワー長さm | | | | |
|----------|-------|-----------------------|------|------------|-----|-----------------------|------------|------------|-----------|-----------------------|------------|------------|-----|-----------------------|------------|------------|-----|-----------------------|------------|------------|------|-------|
| ジブ長さm | | 27.4 | | | | 30.5 | | | | 33.5 | | | | 36.6 | | | | 39.6 | | | | ジブ長さm |
| タワー角度 | | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 |
| 作業半径 (m) | 9.0 | 27.0/9.5m | | | | | | | | | | | | | | | | | | | | 9.0 |
| | 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | 27.0/11.4m | | | | | | | | 10.0 |
| | 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 27.0 | | | | | 27.0/12.1m | | | 12.0 |
| | 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 27.0 | | | | | 27.0 | | | 14.0 |
| | 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 26.4 | | | | | 26.4 | | | 16.0 |
| | 18.0 | 27.0 | | | | 26.4 | | | | 26.2 | | | | 26.0 | | | | | 25.8 | | | 18.0 |
| | 20.0 | 25.3 | | | | 24.6 | | | | 24.3 | | | | 24.1 | | | | | 23.9 | | | 20.0 |
| | 22.0 | 23.3 | 26.4 | | | 22.9 | 25.2/23.2m | | | 22.5 | | | | 22.3 | | | | | 22.1 | | | 22.0 |
| | 24.0 | 21.3 | 24.8 | | | 21.3 | 24.4 | | | 21.1 | 23.5/24.3m | | | 20.7 | 22.0/25.4m | | | 20.5 | | | | 24.0 |
| | 26.0 | 19.1 | 22.9 | | | 19.6 | 22.4 | | | 19.5 | 21.9 | | | 19.1 | 21.5 | | | 18.8 | 20.6/26.6m | | | 26.0 |
| | 28.0 | 16.1 | 21.0 | | | 17.8 | 20.7 | | | 17.8 | 20.3 | | | 17.8 | 19.9 | | | 17.2 | 19.6 | | | 28.0 |
| | 30.0 | 11.3 | 19.3 | | | 15.5 | 19.3 | | | 16.3 | 19.0 | | | 16.5 | 18.6 | | | 16.1 | 18.3 | | | 30.0 |
| | 32.0 | 10.9/30.1m | 17.9 | 13.9/33.9m | | 11.9 | 17.9 | | | 14.7 | 17.6 | | | 15.2 | 17.4 | | | 15.0 | 17.1 | | | 32.0 |
| | 34.0 | | 16.5 | 13.9 | | 9.7/33.1m | 16.6 | 12.9/35.5m | | 11.8 | 16.4 | | | 13.9 | 16.2 | | | 14.0 | 16.0 | | | 34.0 |
| | 36.0 | | 14.9 | 12.9 | | | 15.3 | 12.7 | | 8.5 | 15.3 | 12.0/37.1m | | 11.5 | 15.2 | | | 13.0 | 15.0 | | | 36.0 |
| | 38.0 | | 13.0 | 12.0 | | | 14.1 | 11.8 | | | 14.3 | 11.6 | | 9.0 | 14.2 | 11.2/38.7m | | 11.0 | 14.1 | | | 38.0 |
| | 40.0 | | | 11.2 | | | 12.6 | 11.0 | | | 13.2 | 10.9 | | 7.5/39.0m | 13.3 | 10.7 | | 9.0 | 13.2 | 10.4/40.3m | | 40.0 |
| | 42.0 | | | 10.5 | | | 11.7/41.0m | 10.3 | | | 12.0 | 10.2 | | | 12.4 | 10.0 | | 6.7/41.9m | 12.3 | 9.9 | | 42.0 |
| | 44.0 | | | 9.9 | | | | 9.7 | | | 10.6/43.9m | 9.6 | | | 11.4 | 9.4 | | | 11.6 | 9.2 | | 44.0 |
| | 46.0 | | | 9.4/45.7m | | | | 9.1 | 6.7/46.8m | | | 9.0 | | | 10.3 | 8.9 | | | 10.7 | 8.7 | | 46.0 |
| 48.0 | | | | 6.7 | | | 8.6 | 6.4 | | | 8.5 | 6.1/48.8m | | 9.7/46.9m | 8.4 | | | 9.8 | 8.2 | | 48.0 | |
| 50.0 | | | | 6.3 | | | 8.5/48.6m | 6.0 | | | 8.0 | 5.9 | | | 7.9 | 5.5/50.8m | | 8.6/49.8m | 7.7 | | 50.0 | |
| 52.0 | | | | 5.9 | | | | 5.7 | | | 7.7/51.5m | 5.5 | | | 7.5 | 5.3 | | | 7.3 | 4.9/52.9m | 52.0 | |
| 54.0 | | | | 5.8/52.7m | | | | 5.4 | | | | 5.2 | | | 7.1 | 5.0 | | | 6.9 | 4.8 | 54.0 | |
| 56.0 | | | | | | | | 5.1/55.7m | | | | 4.9 | | | 7.0/54.5m | 4.7 | | | 6.5 | 4.5 | 56.0 | |
| 58.0 | | | | | | | | | | | | 4.6 | | | | 4.4 | | | 6.3/57.4m | 4.2 | 58.0 | |
| 60.0 | | | | | | | | | | | | 4.5/58.6m | | | | 4.2 | | | | 3.9 | 60.0 | |
| 62.0 | | | | | | | | | | | | | | | | 4.0/61.6m | | | | 3.7 | 62.0 | |
| 64.0 | | | | | | | | | | | | | | | | | | | | 3.5 | 64.0 | |
| 66.0 | | | | | | | | | | | | | | | | | | | | 3.4/64.5m | 66.0 | |
| 接地圧 | 前方自立時 | 31.9 t/m ² | | | | 32.3 t/m ² | | | | 32.4 t/m ² | | | | 31.8 t/m ² | | | | 30.0 t/m ² | | | | 前方自立時 |
| | 作業時最大 | 55.1 t/m ² | | | | 56.3 t/m ² | | | | 57.9 t/m ² | | | | 57.8 t/m ² | | | | 59.0 t/m ² | | | | 作業時最大 |

※表中の大太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

▶ タワー長さ 48.8m

(72.0t カウンタウエイト / カーボディウエイトなし) (オプション)



(単位：t)

| タワー長さm | 48.8 | | | | | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|------------|-----------|------------|-----------------------|-----------|-----|------------|-----------------------|-----------|-----------|--------|-------|
| ジブ長さm | 27.4 | | | | 30.5 | | | | 33.5 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | 9.0 | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 14.0 | |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 16.0 | |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.2 | | | | 18.0 | |
| 20.0 | 25.3 | | | | 24.6 | | | | 24.2 | | | | 20.0 | |
| 22.0 | 23.3 | 26.3/22.5m | | | 22.9 | 24.5/23.7m | | | 22.5 | | | | 22.0 | |
| 24.0 | 21.3 | 24.6 | | | 21.3 | 24.1 | | | 21.1 | 22.8/24.8m | | | 24.0 | |
| 26.0 | 19.1 | 22.6 | | | 19.6 | 22.2 | | | 19.5 | 21.7 | | | 26.0 | |
| 28.0 | 16.2 | 20.9 | | | 17.8 | 20.5 | | | 17.8 | 20.1 | | | 28.0 | |
| 30.0 | 11.4 | 19.3 | | | 15.6 | 19.1 | | | 16.3 | 18.7 | | | 30.0 | |
| 32.0 | 11.0/30.1m | 17.9 | | | 12.0 | 17.7 | | | 14.7 | 17.4 | | | 32.0 | |
| 34.0 | | 16.4 | 12.9/34.9m | | 9.7/33.1m | 16.4 | | | 11.9 | 16.2 | | | 34.0 | |
| 36.0 | | 14.9 | 12.3 | | 15.2 | 11.9/36.5m | | | 8.5 | 15.1 | | | 36.0 | |
| 38.0 | | 13.3 | 11.5 | | 14.1 | 11.3 | | | 14.1 | 11.1/38.1m | | | 38.0 | |
| 40.0 | | 12.7/38.6m | 10.7 | | 12.7 | 10.5 | | | 13.1 | 10.4 | | | 40.0 | |
| 42.0 | | | 10.1 | | 11.4/41.5m | 9.9 | | | 12.0 | 9.7 | | | 42.0 | |
| 44.0 | | | 9.5 | | | 9.3 | | | 10.7 | 9.1 | | | 44.0 | |
| 46.0 | | | 8.9 | 6.4/46.2m | | 8.7 | | | 10.3/44.5m | 8.6 | | | 46.0 | |
| 48.0 | | | 8.7/46.7m | 6.0 | | 8.2 | | | 8.1 | 8.1 | | | 48.0 | |
| 50.0 | | | | 5.6 | | 7.8/49.6m | 5.4 | | | 7.6 | 5.1/50.3m | | 50.0 | |
| 52.0 | | | | 5.3 | | | 5.0 | | | 7.2 | 4.8 | | 52.0 | |
| 54.0 | | | | 5.0 | | | 4.7 | | | 7.1/52.6m | 4.5 | | 54.0 | |
| 56.0 | | | | 4.9/54.2m | | | 4.4 | | | | 4.3 | | 56.0 | |
| 58.0 | | | | | | | 4.3/57.2m | | | | 4.0 | | 58.0 | |
| 60.0 | | | | | | | | | | | 3.8 | | 60.0 | |
| 62.0 | | | | | | | | | | | | 3.8/60.1m | 62.0 | |
| 接地圧 | 前方自立時 | 40.9 t/m ² | | | | 41.8 t/m ² | | | | 42.3 t/m ² | | | | 前方自立時 |
| 接地圧 | 作業時最大 | 56.8 t/m ² | | | | 57.4 t/m ² | | | | 58.3 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

(単位：t)

| タワー長さm | 48.8 | | | | | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|------------|-----------|------------|-----------------------|-----------|-----------|------------|-----------------------|-----------|-----|--------|-------|
| ジブ長さm | 36.6 | | | | 39.6 | | | | 42.7 | | | | ジブ長さm | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | タワー角度 | |
| 10.0 | 27.0/11.4m | | | | | | | | | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0/12.1m | | | | 26.4/12.7m | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 26.4 | | | | 14.0 | |
| 16.0 | 26.4 | | | | 26.4 | | | | 26.1 | | | | 16.0 | |
| 18.0 | 26.0 | | | | 25.8 | | | | 25.0 | | | | 18.0 | |
| 20.0 | 24.0 | | | | 23.9 | | | | 23.7 | | | | 20.0 | |
| 22.0 | 22.3 | | | | 22.1 | | | | 21.9 | | | | 22.0 | |
| 24.0 | 20.7 | | | | 20.5 | | | | 20.3 | | | | 24.0 | |
| 26.0 | 19.1 | 21.3 | | | 18.8 | 19.9/27.1m | | | 18.5 | | | | 26.0 | |
| 28.0 | 17.8 | 19.7 | | | 17.2 | 19.4 | | | 16.9 | 18.7/28.3m | | | 28.0 | |
| 30.0 | 16.5 | 18.4 | | | 16.1 | 18.0 | | | 15.6 | 17.6 | | | 30.0 | |
| 32.0 | 15.2 | 17.2 | | | 15.0 | 16.8 | | | 14.6 | 16.4 | | | 32.0 | |
| 34.0 | 13.9 | 16.0 | | | 14.0 | 15.8 | | | 13.6 | 15.4 | | | 34.0 | |
| 36.0 | 11.5 | 15.0 | | | 13.1 | 14.8 | | | 12.8 | 14.5 | | | 36.0 | |
| 38.0 | 9.0 | 14.0 | 10.3/39.7m | | 11.1 | 13.8 | | | 12.1 | 13.7 | | | 38.0 | |
| 40.0 | 7.6/39.0m | 13.1 | 10.2 | | 9.0 | 12.9 | 9.6/41.4m | | 10.5 | 12.8 | | | 40.0 | |
| 42.0 | | 12.3 | 9.6 | | 6.7/41.9m | 12.1 | 9.4 | | 8.8 | 12.0 | 8.9/43.0m | | 42.0 | |
| 44.0 | | 11.3 | 9.0 | | | 11.4 | 8.8 | | 6.8 | 11.2 | 8.6 | | 44.0 | |
| 46.0 | | 10.3 | 8.4 | | | 10.6 | 8.3 | | 5.8/44.8m | 10.6 | 8.1 | | 46.0 | |
| 48.0 | | 9.5/47.4m | 8.0 | | | 9.8 | 7.7 | | 9.9 | 7.6 | | | 48.0 | |
| 50.0 | | | 7.5 | | | 8.9 | 7.3 | | 9.3 | 7.1 | | | 50.0 | |
| 52.0 | | | 7.1 | 4.6/52.4m | | 8.7/50.3m | 6.9 | | 8.5 | 6.7 | | | 52.0 | |
| 54.0 | | | 6.7 | 4.4 | | | 6.5 | 4.1/54.4m | 7.7/53.3m | 6.3 | | | 54.0 | |
| 56.0 | | | 6.4/55.5m | 4.1 | | | 6.1 | 3.8 | | 5.9 | 3.6/56.4m | | 56.0 | |
| 58.0 | | | | 3.8 | | | 5.8 | 3.6 | | 5.6 | 3.4 | | 58.0 | |
| 60.0 | | | | 3.6 | | | 5.7/58.5m | 3.4 | | 5.3 | 3.2 | | 60.0 | |
| 62.0 | | | | 3.4 | | | | 3.1 | | 5.1/61.4m | 2.9 | | 62.0 | |
| 64.0 | | | | 3.3/63.1m | | | | 3.0 | | | 2.8 | | 64.0 | |
| 66.0 | | | | | | | | 2.8 | | | 2.6 | | 66.0 | |
| 接地圧 | 前方自立時 | 41.9 t/m ² | | | | 40.6 t/m ² | | | | 38.0 t/m ² | | | | 前方自立時 |
| 接地圧 | 作業時最大 | 58.9 t/m ² | | | | 58.9 t/m ² | | | | 60.1 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

▶ タワー長さ 51.9m

(72.0t カウンタウエイト / カーボディウエイトなし) (オプション)



(単位：t)

| タワー長さm | 51.9 | | | | | | | | | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|------------|-----------|------------|-----------------------|------------|-----|------------|-----------------------|------------|-----------|------------|-----------------------|-----------|-----------|--------|-------|
| | 27.4 | | | | 30.5 | | | | 33.5 | | | | 36.6 | | | | | ジブ長さm |
| ジブ長さm | | | | | | | | | | | | | | | | | タワー角度 | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | | タワー角度 |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | | | | | 9.0 | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | 27.0/11.4m | | | | 10.0 | |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 27.0 | | | | 12.0 | |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 27.0 | | | | 14.0 | |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | 26.4 | | | | 16.0 | |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.1 | | | | 26.0 | | | | 18.0 | |
| 20.0 | 25.3 | | | | 24.6 | | | | 24.2 | | | | 24.0 | | | | 20.0 | |
| 22.0 | 23.3 | 25.5/23.1m | | | 22.9 | | | | 22.5 | | | | 22.2 | | | | 22.0 | |
| 24.0 | 21.3 | 24.5 | | | 21.3 | 23.7/24.2m | | | 21.1 | 22.1/25.4m | | | 20.7 | | | | 24.0 | |
| 26.0 | 19.1 | 22.5 | | | 19.6 | 22.0 | | | 19.5 | 21.5 | | | 19.1 | 20.6/26.5m | | | 26.0 | |
| 28.0 | 16.3 | 20.7 | | | 17.8 | 20.3 | | | 17.8 | 19.9 | | | 17.8 | 19.6 | | | 28.0 | |
| 30.0 | 11.4 | 19.1 | | | 15.6 | 18.9 | | | 16.2 | 18.5 | | | 16.5 | 18.2 | | | 30.0 | |
| 32.0 | 11.0/30.1m | 17.6 | | | 12.0 | 17.5 | | | 14.7 | 17.3 | | | 15.2 | 17.0 | | | 32.0 | |
| 34.0 | | 16.3 | 11.9/35.9m | | 9.8/33.1m | 16.1 | | | 11.9 | 16.0 | | | 13.9 | 15.9 | | | 34.0 | |
| 36.0 | | 15.0 | 11.9 | | | 15.0 | 11.0/37.6m | | 8.6 | 14.9 | | | 11.6 | 14.8 | | | 36.0 | |
| 38.0 | | 13.5 | 11.1 | | | 14.0 | 10.8 | | | 13.9 | 10.2/39.2m | | 9.1 | 13.8 | | | 38.0 | |
| 40.0 | | 12.4/39.1m | 10.3 | | | 12.8 | 10.1 | | | 13.0 | 10.0 | | 7.6/39.0m | 12.9 | 9.5/40.8m | | 40.0 | |
| 42.0 | | | 9.7 | | | 11.2 | 9.5 | | | 12.0 | 9.3 | | | 12.1 | 9.2 | | 42.0 | |
| 44.0 | | | 9.1 | | | | 8.9 | | | 10.8 | 8.7 | | | 11.3 | 8.6 | | 44.0 | |
| 46.0 | | | 8.5 | 5.4/47.8m | | | 8.4 | | | 10.1/45.0m | 8.2 | | | 10.3 | 8.0 | | 46.0 | |
| 48.0 | | | 8.1/47.7m | 5.4 | | | 7.9 | | | 7.7 | | | | 9.3/47.9m | 7.5 | | 48.0 | |
| 50.0 | | | | 5.0 | | | 7.4 | 4.8 | | | 7.2 | 4.3/51.8m | | 7.1 | | | 50.0 | |
| 52.0 | | | | 4.7 | | | 7.3/50.7m | 4.5 | | | 6.8 | 4.3 | | 6.7 | 3.8/53.9m | | 52.0 | |
| 54.0 | | | | 4.4 | | | | 4.2 | | | 6.5/53.6m | 4.0 | | 6.3 | 3.8 | | 54.0 | |
| 56.0 | | | | 4.2/55.8m | | | | 3.9 | | | | 3.7 | | 5.9 | 3.5 | | 56.0 | |
| 58.0 | | | | | | | | 3.7 | | | | 3.5 | | 5.9/56.6m | 3.3 | | 58.0 | |
| 60.0 | | | | | | | 3.6/58.7m | | | | | 3.3 | | | | 3.1 | 60.0 | |
| 62.0 | | | | | | | | | | | | 3.1/61.7m | | | | 2.9 | 62.0 | |
| 64.0 | | | | | | | | | | | | | | | | 2.7 | 64.0 | |
| 66.0 | | | | | | | | | | | | | | | | 2.7/64.6m | 66.0 | |
| 接地圧 | 前方自立時 | 53.8 t/m ² | | | | 55.6 t/m ² | | | | 57.0 t/m ² | | | | 56.8 t/m ² | | | | 前方自立時 |
| | 作業時最大 | 56.9 t/m ² | | | | 58.0 t/m ² | | | | 58.4 t/m ² | | | | 59.8 t/m ² | | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

(単位：t)

| タワー長さm | 51.9 | | | | | | | | | タワー長さm | |
|--------|------------|-----------------------|-----------|------------|-----------------------|-----------|------------|-----------------------|-----------|--------|-------|
| | 39.6 | | | 42.7 | | | 45.7 | | | | ジブ長さm |
| ジブ長さm | | | | | | | | | | タワー角度 | |
| タワー角度 | 90° | 80° | 70° | 90° | 80° | 70° | 90° | 80° | 70° | | タワー角度 |
| 12.0 | 27.0/12.1m | | | 26.4/12.7m | | | 24.8/13.3m | | | 12.0 | |
| 14.0 | 27.0 | | | 26.4 | | | 24.5 | | | 14.0 | |
| 16.0 | 26.4 | | | 26.1 | | | 23.6 | | | 16.0 | |
| 18.0 | 25.8 | | | 25.0 | | | 22.6 | | | 18.0 | |
| 20.0 | 23.8 | | | 23.6 | | | 21.6 | | | 20.0 | |
| 22.0 | 22.1 | | | 21.9 | | | 20.6 | | | 22.0 | |
| 24.0 | 20.5 | | | 20.3 | | | 19.6 | | | 24.0 | |
| 26.0 | 18.8 | 19.4/27.6m | | 18.5 | | | 18.3 | | | 26.0 | |
| 28.0 | 17.2 | 19.2 | | 16.9 | 18.1/28.8m | | 16.7 | 17.0/29.9m | | 28.0 | |
| 30.0 | 16.1 | 17.8 | | 15.6 | 17.4 | | 15.3 | 17.0 | | 30.0 | |
| 32.0 | 15.0 | 16.6 | | 14.6 | 16.2 | | 14.3 | 15.8 | | 32.0 | |
| 34.0 | 13.9 | 15.6 | | 13.6 | 15.2 | | 13.4 | 14.8 | | 34.0 | |
| 36.0 | 13.0 | 14.6 | | 12.8 | 14.3 | | 12.5 | 14.0 | | 36.0 | |
| 38.0 | 11.1 | 13.6 | | 12.1 | 13.4 | | 11.8 | 13.2 | | 38.0 | |
| 40.0 | 9.1 | 12.7 | | 10.6 | 12.6 | | 11.2 | 12.4 | | 40.0 | |
| 42.0 | 6.7/41.9m | 11.9 | 8.8/42.4m | 8.8 | 11.8 | | 10.0 | 11.6 | | 42.0 | |
| 44.0 | | 11.2 | 8.3 | 6.8 | 11.0 | 8.1 | 8.4 | 10.9 | 7.5/45.6m | 44.0 | |
| 46.0 | | 10.5 | 7.8 | 5.9/44.8m | 10.4 | 7.6 | 6.8 | 10.3 | 7.4 | 46.0 | |
| 48.0 | | 9.8 | 7.3 | | 9.8 | 7.1 | 5.2/47.8m | 9.7 | 6.9 | 48.0 | |
| 50.0 | | 8.9 | 6.9 | | 9.2 | 6.7 | | 9.2 | 6.5 | 50.0 | |
| 52.0 | | 8.4/50.9m | 6.5 | | 8.5 | 6.3 | | 8.7 | 6.1 | 52.0 | |
| 54.0 | | | 6.1 | | 7.6/53.8m | 5.9 | | 8.0 | 5.7 | 54.0 | |
| 56.0 | | | 5.7 | | | 5.5 | | 7.3 | 5.4 | 56.0 | |
| 58.0 | | | 5.4 | | | 5.2 | | 6.9/56.8m | 5.1 | 58.0 | |
| 60.0 | | | 5.2/59.5m | | | 4.9 | | | 4.8 | 60.0 | |
| 62.0 | | | | | | 4.7 | | | 4.5 | 62.0 | |
| 64.0 | | | | | | 4.6/62.5m | | | 4.3 | 64.0 | |
| 66.0 | | | | | | | | | 4.1/65.4m | 66.0 | |
| 接地圧 | 前方自立時 | 55.7 t/m ² | | | 54.4 t/m ² | | | 48.5 t/m ² | | | 前方自立時 |
| | 作業時最大 | 60.1 t/m ² | | | 58.7 t/m ² | | | 59.4 t/m ² | | | 作業時最大 |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。

▶ タワー長さ 54.9m



(72.0t カウンタウエイト / カーボディウエイトなし) (オプション)

(単位：t)

| タワー長さm | 54.9 | | | | | | | | | | | | | | | タワー長さm | | |
|--------|------------|-----------------------|------------|-----------|------------|------------|-----------------------|-----------|------------|------------|-----------------------|-----|------|-----------------------|------------|-----------|-------|------|
| ジブ長さm | 27.4 | | | | | 30.5 | | | | 33.5 | | | 36.6 | | | ジブ長さm | | |
| タワー角度 | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 60° | 90° | 80° | 70° | 90° | 80° | 70° | タワー角度 | | | |
| 9.0 | 27.0/9.5m | | | | | | | | | | | | | | 9.0 | | | |
| 10.0 | 27.0 | | | | 27.0/10.2m | | | | 27.0/10.8m | | | | | 27.0/11.4m | 10.0 | | | |
| 12.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | 27.0 | 12.0 | | | |
| 14.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | 27.0 | 14.0 | | | |
| 16.0 | 27.0 | | | | 27.0 | | | | 27.0 | | | | | 26.4 | 16.0 | | | |
| 18.0 | 27.0 | | | | 26.4 | | | | 26.1 | | | | | 25.9 | 18.0 | | | |
| 20.0 | 25.2 | | | | 24.6 | | | | 24.2 | | | | | 24.0 | 20.0 | | | |
| 22.0 | 23.3 | 24.7/23.6m | | | 22.9 | | | | 22.5 | | | | | 22.2 | 22.0 | | | |
| 24.0 | 21.3 | 24.3 | | | 21.3 | 23.0/24.7m | | | 21.1 | 21.4/25.9m | | | | 20.6 | 24.0 | | | |
| 26.0 | 19.1 | 22.3 | | | 19.6 | 21.8 | | | 19.5 | 21.3 | | | | 19.1 | 20.0/27.0m | 26.0 | | |
| 28.0 | 16.3 | 20.6 | | | 17.8 | 20.1 | | | 17.8 | 19.7 | | | | 17.8 | 19.4 | 28.0 | | |
| 30.0 | 11.5 | 18.8 | | | 15.6 | 18.7 | | | 16.2 | 18.4 | | | | 16.5 | 18.0 | 30.0 | | |
| 32.0 | 11.1/30.1m | 17.4 | | | 12.1 | 17.2 | | | 14.7 | 17.0 | | | | 15.2 | 16.8 | 32.0 | | |
| 34.0 | | 16.1 | | | 9.8/33.1m | 15.9 | | | 12.0 | 15.8 | | | | 13.9 | 15.6 | 34.0 | | |
| 36.0 | | 14.9 | 11.0/37.0m | | | 14.8 | | | 8.6 | 14.6 | | | | 11.6 | 14.5 | 36.0 | | |
| 38.0 | | 13.6 | 10.6 | | | 13.8 | 10.1/38.6m | | | 13.6 | | | | 9.1 | 13.5 | 38.0 | | |
| 40.0 | | 12.1/39.6m | 9.9 | | | 12.8 | 9.7 | | | 12.7 | 9.4/40.2m | | | 7.6/39.0m | 12.6 | 8.7/41.8m | 40.0 | |
| 42.0 | | | 9.3 | | | 11.4 | 9.0 | | | 12.0 | 8.8 | | | | 11.8 | 8.6 | 42.0 | |
| 44.0 | | | 8.7 | | | 10.9/42.6m | 8.4 | | | 10.9 | 8.2 | | | | 11.1 | 8.1 | 44.0 | |
| 46.0 | | | 8.2 | | | | 7.9 | | | 9.8/45.5m | 7.7 | | | | 10.3 | 7.6 | 46.0 | |
| 48.0 | | | 7.7 | | | | 7.4 | | | | 7.2 | | | | 9.5 | 7.1 | 48.0 | |
| 50.0 | | | 7.5/48.8m | 4.4 | | | 7.0 | 3.9/51.3m | | | 6.8 | | | | 9.0/48.5m | 6.6 | 5.0 | 50.0 |
| 52.0 | | | | 4.1 | | | 6.6/51.7m | 3.8 | | | 6.4 | | | | | 6.3 | 52.0 | |
| 54.0 | | | | 3.9 | | | | 3.6 | | | 6.0 | | | | 5.9 | 54.0 | | |
| 56.0 | | | | 3.6 | | | | 3.3 | | | 5.9/54.7m | | | | 5.6 | 56.0 | | |
| 58.0 | | | | 3.5/57.3m | | | | 3.1 | | | | | | | 5.3/57.6m | 58.0 | | |
| 60.0 | | | | | | | | 2.9 | | | | | | | | 60.0 | | |
| 62.0 | | | | | | | | 2.9/60.2m | | | | | | | | 62.0 | | |
| 接地圧 | 前方自立時 | 80.4 t/m ² | | | | | 85.2 t/m ² | | | | 89.5 t/m ² | | | 89.7 t/m ² | | | 前方自立時 | 接地圧 |
| | 作業時最大 | 57.7 t/m ² | | | | | 58.2 t/m ² | | | | 59.9 t/m ² | | | 57.1 t/m ² | | | 作業時最大 | |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。
 ※ジブ長さ 27.4m での、ボールフックの使用はできません。

(単位：t)

| タワー長さm | 54.9 | | | | | | | | | | | | | | | タワー長さm | | |
|--------|------------|-----------------------|-----------|-----|------------|------------|-----------------------|-----------|------------|------------|-----------------------|-----|-----------|-----------------------|-----|--------|-------|-----|
| ジブ長さm | 39.6 | | | | | 42.7 | | | | 45.7 | | | 48.8 | | | ジブ長さm | | |
| タワー角度 | 90° | 80° | 70° | 90° | 80° | 70° | 90° | 80° | 70° | 90° | 80° | 70° | 90° | 80° | 70° | タワー角度 | | |
| 12.0 | 27.0/12.1m | | | | 26.4/12.7m | | | | 24.7/13.3m | | | | | | | 12.0 | | |
| 14.0 | 27.0 | | | | 26.4 | | | | 24.5 | | | | | 21.3 | | 14.0 | | |
| 16.0 | 26.4 | | | | 26.0 | | | | 23.5 | | | | | 20.5 | | 16.0 | | |
| 18.0 | 25.8 | | | | 24.9 | | | | 22.5 | | | | | 19.8 | | 18.0 | | |
| 20.0 | 23.8 | | | | 23.6 | | | | 21.5 | | | | | 19.3 | | 20.0 | | |
| 22.0 | 22.0 | | | | 21.8 | | | | 20.6 | | | | | 18.6 | | 22.0 | | |
| 24.0 | 20.5 | | | | 20.3 | | | | 19.6 | | | | | 17.7 | | 24.0 | | |
| 26.0 | 18.7 | | | | 18.5 | | | | 18.3 | | | | | 16.8 | | 26.0 | | |
| 28.0 | 17.2 | 18.8/28.2m | | | 16.9 | 17.6/29.3m | | | 16.7 | | | | | 16.0 | | 28.0 | | |
| 30.0 | 16.1 | 17.6 | | | 15.6 | 17.1 | | | 15.3 | 16.5/30.5m | | | 15.1 | 15.5/31.6m | | 30.0 | | |
| 32.0 | 15.0 | 16.4 | | | 14.6 | 16.0 | | | 14.3 | 15.6 | | | 14.1 | 15.3 | | 32.0 | | |
| 34.0 | 13.9 | 15.4 | | | 13.6 | 15.0 | | | 13.3 | 14.7 | | | 13.1 | 14.4 | | 34.0 | | |
| 36.0 | 12.9 | 14.3 | | | 12.8 | 14.2 | | | 12.5 | 13.8 | | | 12.3 | 13.5 | | 36.0 | | |
| 38.0 | 11.1 | 13.4 | | | 12.0 | 13.2 | | | 11.8 | 13.0 | | | 11.5 | 12.7 | | 38.0 | | |
| 40.0 | 9.1 | 12.5 | | | 10.6 | 12.3 | | | 11.2 | 12.2 | | | 10.9 | 12.0 | | 40.0 | | |
| 42.0 | 6.8/41.9m | 11.7 | 8.0/43.4m | | 8.8 | 11.5 | | | 10.0 | 11.4 | | | 10.4 | 11.3 | | 42.0 | | |
| 44.0 | | 11.0 | 7.8 | | 6.9 | 10.8 | 7.3/45.1m | | 8.5 | 10.7 | | | 9.4 | 10.5 | | 44.0 | | |
| 46.0 | | 10.3 | 7.3 | | 5.9/44.8m | 10.2 | 7.1 | 7.1 | 10.1 | 6.8/46.7m | 8.1 | | 9.9 | | | 46.0 | | |
| 48.0 | | 9.8 | 6.8 | | | 9.6 | 6.6 | 5.2/47.8m | 9.5 | 6.5 | 6.7 | | 9.3 | 6.2/48.3m | | 48.0 | | |
| 50.0 | | 9.0 | 6.4 | | | 9.1 | 6.2 | | 9.0 | 6.0 | 5.2 | | 8.8 | 5.8 | | 50.0 | | |
| 52.0 | | 8.2/51.4m | 6.0 | | | 8.5 | 5.8 | | 8.5 | 5.7 | 4.6/50.7m | | 8.3 | 5.4 | | 52.0 | | |
| 54.0 | | | 5.7 | | | 7.6 | 5.5 | | 8.0 | 5.3 | | | 7.9 | 5.1 | | 54.0 | | |
| 56.0 | | | 5.3 | | | 7.4/54.4m | 5.1 | | 7.3 | 5.0 | | | 7.5 | 4.7 | | 56.0 | | |
| 58.0 | | | 5.0 | | | | 4.8 | | 6.8/57.3m | 4.7 | | | 6.9 | 4.4 | | 58.0 | | |
| 60.0 | | | 4.7 | | | | 4.6 | | | 4.4 | | | 6.2 | 4.2 | | 60.0 | | |
| 62.0 | | | 4.7/60.6m | | | | 4.3 | | | 4.1 | | | 6.1/60.2m | 3.9 | | 62.0 | | |
| 64.0 | | | | | | | 4.1/63.5m | | | 3.9 | | | | 3.7 | | 64.0 | | |
| 66.0 | | | | | | | | | | 3.7 | | | | 3.5 | | 66.0 | | |
| 68.0 | | | | | | | | | | 3.6/66.4m | | | | 3.3 | | 68.0 | | |
| 70.0 | | | | | | | | | | | | | | 3.1/69.4m | | 70.0 | | |
| 接地圧 | 前方自立時 | 88.5 t/m ² | | | | | 88.7 t/m ² | | | | 82.1 t/m ² | | | 68.5 t/m ² | | | 前方自立時 | 接地圧 |
| | 作業時最大 | 58.9 t/m ² | | | | | 58.5 t/m ² | | | | 59.8 t/m ² | | | 61.1 t/m ² | | | 作業時最大 | |

※表中の太線で囲まれた部分は、ブーム等の強度によって定められた値です。