







LTM1160NX (自走式)

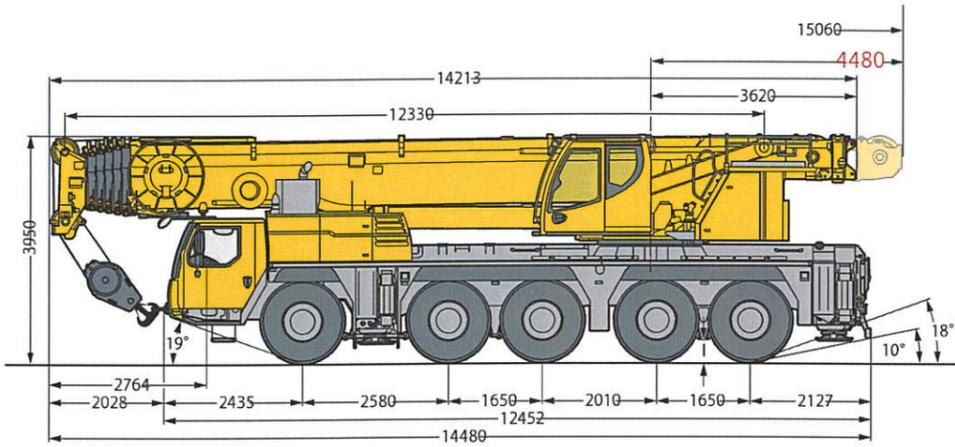

AC130-5 (自走式)

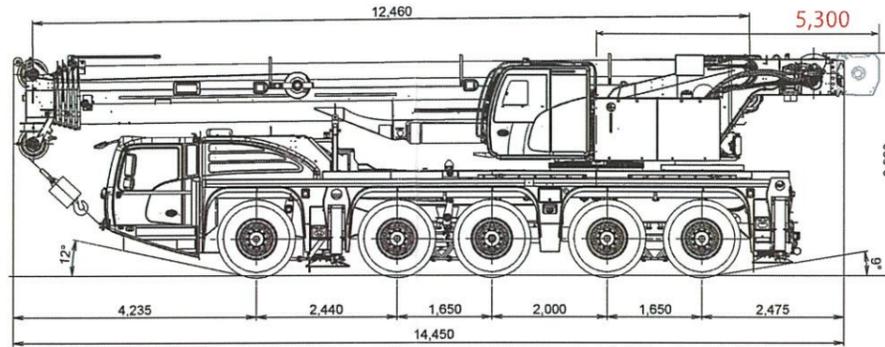

ATF160G-5 (ブーム要分解)

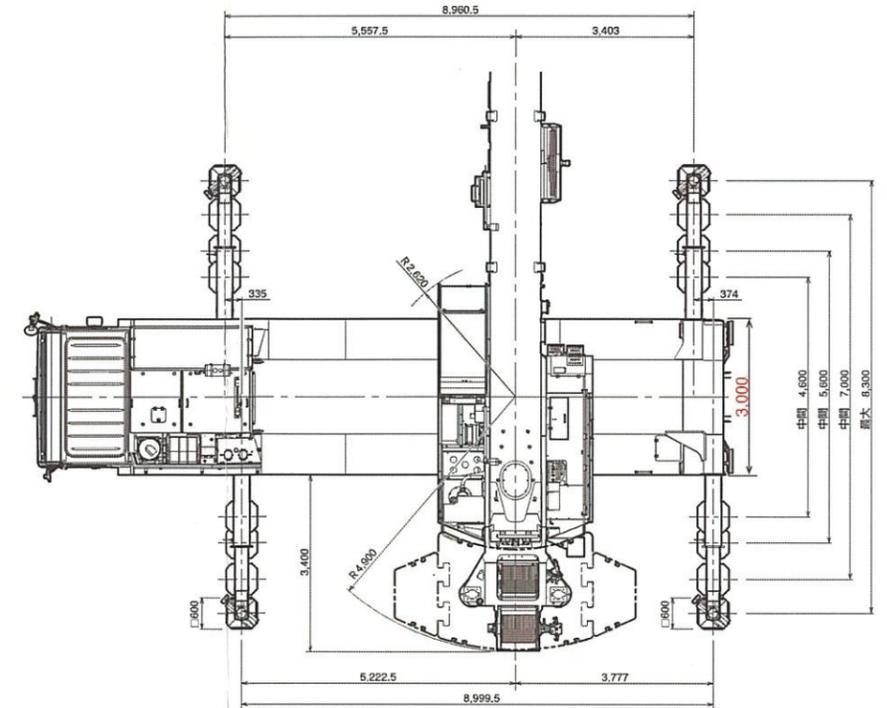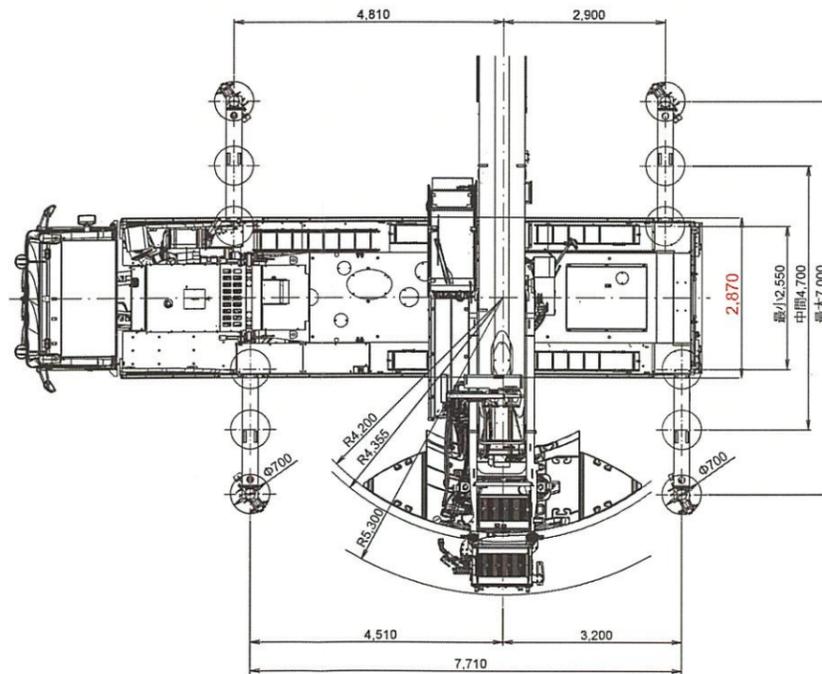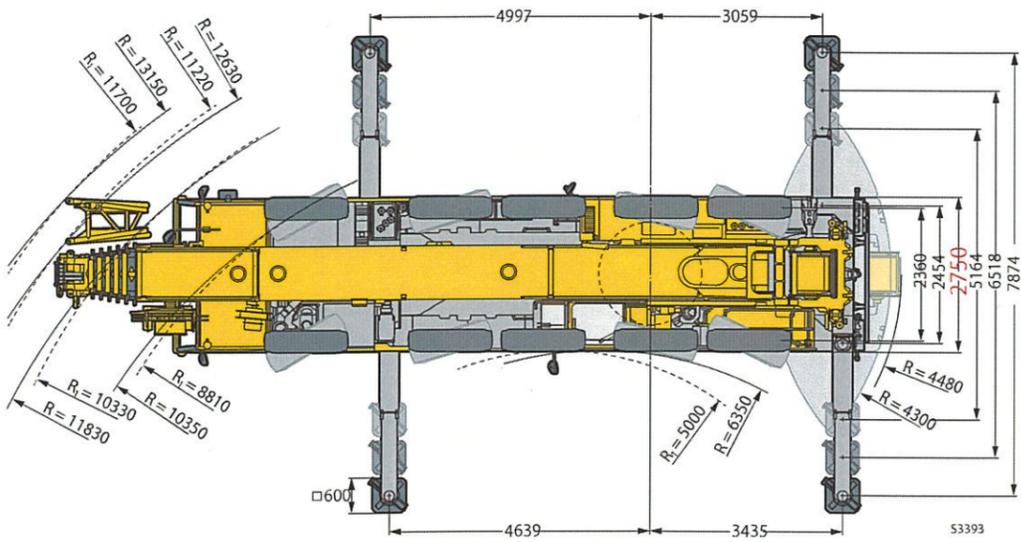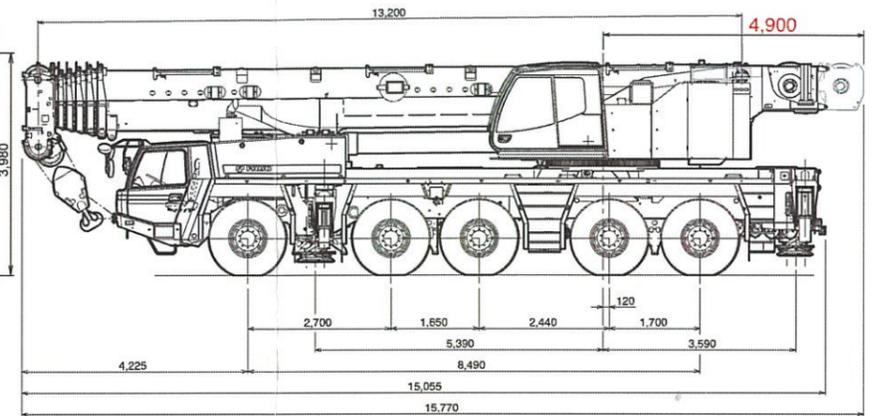

ブーム長別 定格総荷重比較表

360度旋回、各機種におけるフルウェイトにて比較

	タダノD	タダノF	リープヘル	タダノD	タダノF	リープヘル	タダノD	タダノF	リープヘル	タダノD	タダノF	リープヘル	タダノD	タダノF	リープヘル	タダノD	タダノF	リープヘル	リープヘル	リープヘル	リープヘル	リープヘル								
	AC150	ATF160	1160NX	AC150	ATF160	1160NX	AC150	ATF160	1160NX	AC150	ATF160	1160NX	AC150	ATF160	1160NX	AC150	ATF160	1160NX	1160NX	1160NX	1160NX	1160NX								
	12.5m	13.2m	12.3m	20.7m	21.9m	20.6m	33.0m	35m	32.9m	37.1m	39.3m	37.0m	45.3m	43.7m	45.2m	49.4m	48m	49.4m	59.8m	60m	59.7m	61.2m	61.7m	63.1m	66m					
2.5							2.5						2.5						2.5						2.5					
3	91.7	140.7	86	86.9	86.9	73.4	3						3						3						3					
3.5		129.6	86		86.9	73.4	3.5						3.5						3.5						3.5					
4	78.6	120	86	74.8	86.9	73.4	4						4						4						4					
4.5		111.6	85.7		86.9	73.4	4.5		55.1	52.1			4.5						4.5						4.5					
5	67.6	101.1	81.5	65.5	86.9	73.4	5	44.5	55.1	52.1			5						5						5					
6	59.2	88.8	71.3	58.3	86.9	69.1	6	43.9	53.5	52.1	36	41.4	44	6		33.4			6						6					
7	52.4	78.4	63.1	52.5	78.3	62.8	7	43.3	48.5	50.8	35.7	41.4	44	7		33.4	27.7		7		26.9				7					
8	46.9	70	56.3	47.7	69.9	56.8	8	42.3	45.1	48.5	34.3	41.4	44	8	22.1	33.4	27.7		8		26.9	22.1			8					
9	39.1	62.9	49.3	43.1	62.6	49.9	9	40.6	43.6	46.6	32.6	38.4	43.8	9	22	33.4	27.7	17.8	9		26.9	22.1			9					
10		50.6	40.5	39.3	56.8	44.7	10	37.6	41.6	42.8	30.7	35.1	41.2	10	21.8	32.3	27.3	17.7	10		26.9	22.1	14	12.5	11.7	10				
11					51.2	40	11		39.4	38.9		32.2	37.6	11		30.3	26.6		11		26	22	14	12.4	11.6	11.5	10.6	9.1	11	
12				32.6	46.5	36.1	12	32.4	37	35.5	26.7	29.6	34.4	12	20.7	28.3	25.7	17.6	12	10.5	25.1	21.7	14	12.3	11.5	11.4	10.6	9.1	12	
14				27.3	39.1	30	14	26.6	33	29.9	23.3	25.4	29	14	19	24.6	23.7	16.8	14	10.5	22.9	20.5	14	12	11.2	11.2	10.4	8.9	14	
16				22.9	32	25.9	16	21.7	29.8	25.5	20.5	22.1	24.6	16	17.3	21.3	21.7	15.7	16	10.5	20.9	19	14	11.6	10.6	11	10.2	8.7	16	
18				14.6	26.6	21.4	18	18.2	27.2	21.5	18.2	19.4	21	18	15.7	18.7	19.8	14.4	18	10.5	18.3	17.6	13	11.1	10.1	10.6	9.9	8.4	18	
20							20	15.5	23.5	18.3	16	17.2	18.6	20	14.1	16.5	17.4	13.2	20	10.4	16.2	16.2	12.2	10.5	9.5	10.2	9.6	8	20	
22							22	14.3	20.3	16.2	13.8	15.4	16.3	22	12.7	14.7	15.4	12.1	22	10	14.4	14.8	11.4	9.9	8.9	9.8	9.2	7.6	22	
24							24	12.6	17.6	14.6	12	13.8	14.2	24	11.3	13.2	13.6	11	24	9.5	12.9	13.1	10.7	9.4	8.3	9.3	8.8	7.2	24	
26							26	11.1	15.4	13	10.5	12.5	12.6	26	10.2	11.8	11.9	10	26	8.9	12	11.9	9.9	8.9	7.7	8.8	8.4	6.8	26	
28							28	9.9	13.6	11.6	9.3	11.7	11.2	28	9	10.7	10.9	9.2	28	8.2	11.2	10.6	9	8.4	7.2	8.4	8	6.4	28	
30							30	7.8	12	10.4	8.7	10.9	10	30	8.3	9.7	9.7	8.3	30	7.6	10.3	9.4	8.3	8	6.8	8	7.6	5.9	30	
32							32	6.9			8.1	10.3	8.9	32	7.6	8.8	8.7	7.4	32	7	9.5	8.5	7.6	7.6	6.3	7.6	7.2	5.6	32	
34							34				6.6	9.8	8.1	34	6.8	8	7.8	6.5	34	6.2	8.8	7.5	7	6.9	5.9	6.9	6.9	5.2	34	
36							36				5.3	9.2		36	6.2	7.3	7.2	5.8	36	5.5	8.2	7	6.5	6.3	5.5	6.1	6.2	4.8	36	
38							38							38	5.7	6.8	6.5	5.3	38	4.9	7.6	6.3	6	5.9	5.1	5.4	5.5	4.5	38	
40							40							40	5.1	6.5	6	4.9	40	4.3	7.1	5.7	5.4	5.3	4.7	4.8	4.9	4.2	40	
42							42							42	4.4		5.5	4.6	42	3.8	6.5	5.3	5	4.7	4.4	4.3	4.3	4	42	
44							44							44				4.2	44	3.4	5.9	4.8	4.6	4.3	4.2	3.9	3.9	3.7	44	
46							46							46				3.8	46	2.9		4.4	4.2	3.9	3.9	3.5	3.5	3.6	3.5	46
48							48							48					48	2.6		3.9	3.6	3.6	3.5	3.2	3.2	3.2	3.2	48
50																			50	2.2		3.5	3.3	3.3	3.2	2.9	2.9	2.9	2.9	50
52																			52		3.2	3			2.9	2.6	2.6	2.6	2.6	52
54	AC130-5			ブーム長59.8m	CWT42.2トン					最小後端半径4355mm(5300mm)		ORL7710*W7000						54	1.7		2.9	2.7		2.7	2.3	2.4	2.4	54		
56	ATF160G-5			ブーム長60.0m	CWT50.0トン					最小後端半径4900mm(4900mm)		ORL8999*W8300						56			2.6	2.5		2.5	2	2.1	2.1	2.1	56	
	LTM1160NX			ブーム長66.0m	CWT45トン					最小後端半径4300mm(4480mm)		ORL8056*W7874						58						2.2	1.8	1.8	1.8	58		
																			60								1.6	1.6	60	
																			62									1.3	62	

【各機種概要】

AC130-5 ブーム長59.8m CWT42.2トン 最小後端半径4355mm(5300mm) ORL7710*W7000
 ATF160G-5 ブーム長60.0m CWT50.0トン 最小後端半径4900mm(4900mm) ORL8999*W8300
 LTM1160NX **ブーム長66.0m** CWT45トン 最小後端半径**4300mm(4480mm)** ORL8056*W7874